ALEXRIMS 2019



2019 ALEXRIMS

FOR THE WAY YOU RIDE

WWW.ALEXRIMS.COM



亞獵士科技股份有限公司
ALEX GLOBAL TECHNOLOGY INC.
台南市山上區明和里北勢洲21-2號
No.21-2,Beishizhou, Minghe Vil.,
Shanshang Dist., Tainan City 743,
Taiwan
電話： +886-6-5782151
傳真： +886-6-5782394
E-MAIL：alexrims@alexrims.com.tw
WEB：www.alexrims.com

益昌鋁製品（太倉）有限公司
XYZ ALUMINIUM PRODUCTS
(TAI CANG)CO.,LTD.
江蘇省太倉市沙溪鎮岳王臺北路2號
No.2 Tai-Pei Road, Yue-Wang District,
Sha-Xi Town, Tai-Cang City, Jiang-Su
Province,China
電話： +86-512-5345 6636 53458348
傳真： +86-512-5345 8322
E-mail: alextc53456636@163.com

大造熊有限公司
DA CHAO SHONG CO.,LTD.
柬埔寨柴楨省巴域市國道一號大成巴域
經濟特區+ (大造熊公司)
Tai Seng Bavet Special Economic
Zone, National Road. 1 , Bavet City,
Svay Rieng Province, Cambodia
Da Chao Shong Co.,Ltd.
電話：+855-44-712265
E-MAIL: dachaoshong@gmail.com

大造熊科技股份有限公司
BEAR PAWLS, INC.
428-72台中市大雅區鳳鳴路6-1號
1F.,NO.6-1,Fengming Rd.,Daya Dist.,
Taichung City 42872, Taiwan(R.O.C)
電話：+886-4-25606996
傳真：+886-4-25606886
E-MAIL:bearpawls@bearpawls.com.tw
WEB: www.bearpawls.com

ALEXRIMS

We began in 1992 with the goal of building the highest quality alloy bicycle rims. Since our humble beginning in 1992, Alex Global Technology has developed into the global leader in rim and wheel technology, design, materials and manufacturing.

Here at Alex Global Technology we design and build bicycle specific products for the way YOU ride.

We are an engineering company at heart with a true passion for cycling. We understand cycling because we are cyclists. We have the drive, knowledge and skill to make the best products on the market. We control our manufacturing process 100%. From Bauxite to finished product it never leaves our hands. We never compromise quality or performance and as a result, produce some of the strongest, lightest and best functioning wheels and rims on the market.

We've partnered with a great team of professional athletes all over the world, in every category be it Road, DH, XC, Enduro, Slopestyle or BMX. They test, evaluate and change our products before they are released into the market. They all agree that Alexrims is creating industry leading wheels and rims that promote success in all disciplines of riding and racing.

When you are ready to take your riding to the next level in performance and quality think ALEXRIMS. We make rims...

FOR THE WAY YOU RIDE.



Dr. Alex Chen

CONTENTS

P12 TUBULAR

TUBULAR 2.0
TUBULAR DISC

P13 RACING/CYCLOCROSS

PRO35
PRO30
PRO26 *NEW*
CX35
CX30
CX28
CX26 *NEW*
CX24
R390
DA22
RACE38
AT550
AT510
AT505 *NEW*
AT490
AT470
R450
GV30 *NEW*
GV24P
RSD30
GD30
GD24 *NEW*
CXD22
DRAW1.9S
GD26P
GD24P
DRAW2.1P
DRAW1.9P
DRAW1.7P
ATD560 *NEW*
ATD550
ATD500 *NEW*
ATD490
ATD470

P19 MTB/TREKKING

SC PRO
EVO2.3
SPARK 2.1
SPARK 2.5
SPARK 2.7
EXR30 *NEW*
EXR27 *NEW*
EXR25 *NEW*
VOLAR 2.3
VOLAR 2.1
XD-LITE
XD-ELITE
MD30
MD27
MD25
MD23
MD21
MD19
XT19
G6000
EN24
DH19
DM18
X2200
ACE19
ACE18
DC19

P24 PLUS

VOLAR 3.8
XM35
MD50
MD40
MD35

P25 FATBIKE

BLIZZERK SL 90
BLIZZERK 100
BLIZZERK 90
BLIZZERK 80
BLIZZERK 70

P26 FR/DH/ENDURO/BMX

SUPRA 35
SUPRA D
SUPRA BH
DX32
DM24
VENGEANCE
SUPRA DOME EX
SUPRA DOME

P28 MNT BIKE/YOUTH

R390
DA22
R450
ACE18
MD25
MD19
DA16
DM18

P30 E-BIKE/RIM

EM35 *NEW*
EM30 *NEW*
EM23
FR30
DM24
DM21
DM18
DH19
EV23
ADVENTRUER 2


ALEXRIMS

SURFACE TECHNOLOGY

ALUMINUM EYELETS

We have once again broken the boundaries of technology and developed a new high grade aluminum alloy eyelet. The new eyelets are as durable as the stainless eyelets, but offer several additional benefits.

- Aluminum eyelets require less pressure to manufacture into the rim which reduces stress
- Aluminum material offers better vibration absorption than stainless steel
- Aluminum eyelets are lighter than stainless and offer comparable strength

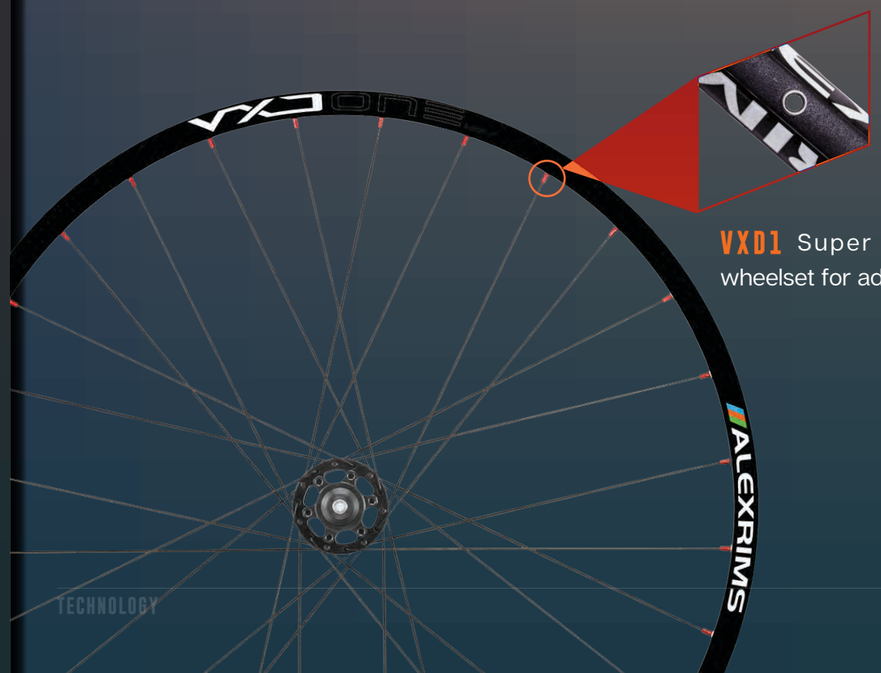

VXD1 Super lightweight XC wheelset for advanced riders

2019ALEXRIMS

LIGHTWEIGHT TECHNOLOGY

SCANDIUM SUPER LIGHT

Sukhoi Fighter's primary material – Scandium - is the heart of ALEXRIMS Superlight Technology. Processing of this difficult material presents a great challenge to maintain all of its properties. Our engineers and R&D team rose to the challenge and developed our proprietary Scandium Super Light (SSL). This development enables ALEXRIMS to build the lightest and strongest rims on the market.

SSL material puts riders on the best available products so they can stand on podiums around the world.
SSL material provides you the technology to pursue your dreams on your road or mountain bike.




SLEEVE TECHNOLOGY



PRO30

Alexrims sleeved joint construction Sleeved rim joints offers the same weight, strength and trueness as a welded joint but at a fraction of the cost. Sleeved joint rims are suitable for tubeless applications

TUBELESSREADY SYSTEM (TRS)

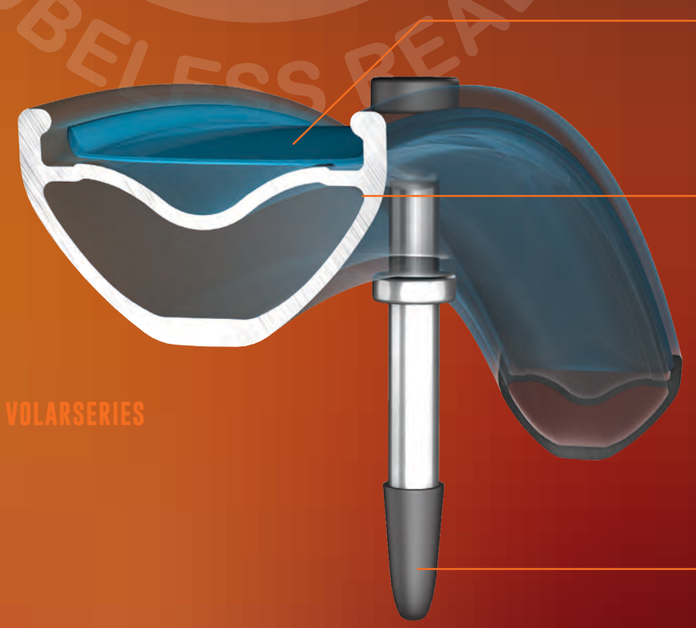

VOLARSERIES





Install blue rim tape evenly across the inside of the rim while covering the spoke holes up to the sides.



Put valve stem through valve hole. Push firmly on the rubber side of the valves as you tighten the valve nut with your hands.




Remove the valve core and add sealant to the tire through the valve. Shake the wheel to coat the inside of the tire and replace valve core.


3DDRILLING

DM18



Alexrims offers further customization for a variety of applications including our 3D drilling technology. 3D drilling makes our most popular rim profiles compatible with large flange hubs as well as e-bike hubs.

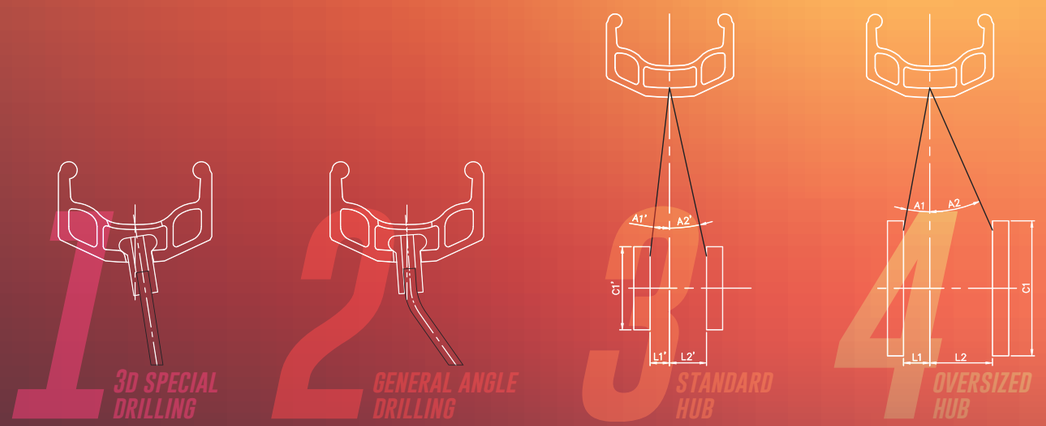

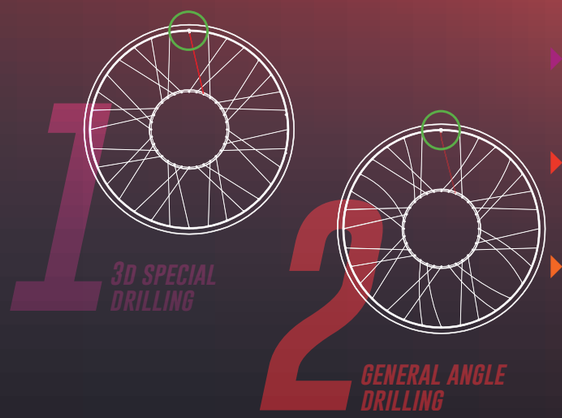

- E-bikes have grown into a major segment in recent years
- Zero need for compromise with technologies from Alexrims
- Select from a wider variety of rim profiles as 3D drilling can be applied to any of them. Alexrims expands your choices while offering leading technology that enhances performance.

DOME DESIGN (PATENT)


ADVANTAGES:

- Securely hugs the rim strip
- Provides increased lateral rigidity
- Lighter, stronger
- Prevents tire rolling as a result of pinch flats




SUPRADOMEEX

ROLLING PIN (PATENT)

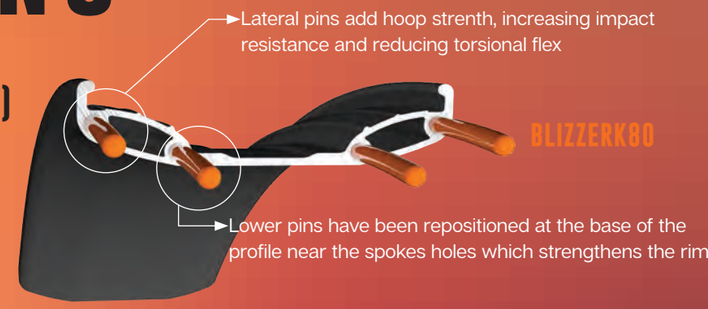

Traditional pinned rims only utilize one pair of pins within the rim's profile where the spoke surface intersects the rim sidewall. For applications with higher impact and cornering forces such as DH and Fatbike, we add a second set of pins to further increase strength, torsional rigidity and structural integrity.

QUATTRO PIN (PATENT)

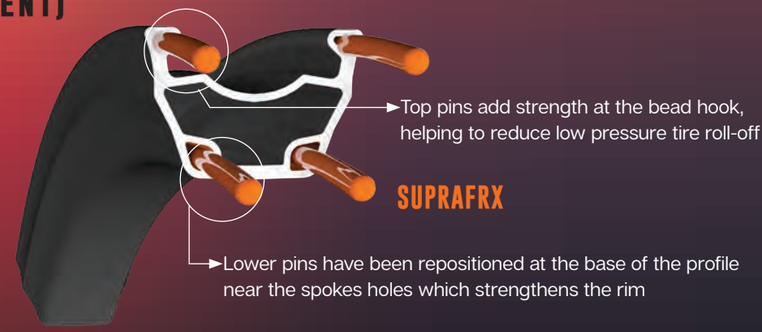

SIDEWALLTECHNOLOGY

INDICATOR (PATENTED)

The Indicator is an ALEXRIMS patented design that incorporates a 0.3mm deep line in the sidewall. As the rim becomes thinner from use the color indicator becomes lighter alerting the user that it is time to replace the rim.

RIMTECHNOLOGY

ANTI SNAKE BITE

ALEXRIMS developed the ASB design to minimize pinch flats caused by sudden impacts under low tire pressure conditions. ASB rims have a unique hook bead at the top of the rim profile that cradles the tire as it compresses under load, protecting the tube and preventing a ride-ending pinch flat. Go ahead and push it! The ALEXRIMS ASB design has you protected.

INNERTECHNOLOGY

WELDED JOINT

A well balanced wheel is the difference between a good wheel and a great wheel. ALEXRIMS Welded Joint rims provide a balanced feel so that every stroke of the pedals is transferred to the road or trail. In fact we think that a balanced wheel is so important that we build over 24 High Quality welded joint rims.

SLEEVE JOINT

Sleeve Joints provide more surface contact with a rim's inner wall for a more secure rim then pin joints but with the same lightweight properties.

ROLLING PIN JOINT

Wide rims for Fatbike and other speciality applications have unique cornering loads imposed on them. Lateral forces can cause one side of a rim to deflect more than the other. Rolling Pin technology adds internal structure wo wide rims by embedding four pins (vs only two) to maintain structural integrity across the entire rim, not just at the edges.

QUATTRO PIN JOINT

Quattro Tec further in creases the strength of pinned joints by adding a second set of pins embedded in the bed hook profile to create a more torsionally rigid structure. The resultant bead hook profile not only strengthens the entire rim but also improves the tire/rim interface to reduce low pressure roll off.

MATERIALTECHNOLOGY

SSL (SCANDIUM SUPER LIGHT)

Scandium Super Light is a space age material developed in our hi-tech 3C division. SSL is stronger, lighter & more rigid than any other alloy rim material.

6A11

Alex's 6A11 material is 1.2 times stronger than traditional 6061 series aluminum rims.

SURFACETECHNOLOGY

CSW (CNC SIDEWALLS)

ALEX CSW technology is a precision CNC machined smooth sidewall to provide ultimate braking efficiency. CSW equipped rims are on our top range of products.

GSW (GROUND SIDEWALLS)

Precision ground sidewalls eliminate surface imperfections, add value and improve brake efficiency.

CP (CHROME PLATED)

Show chrome looks great and is long lasting. And is the choice of Pro BMX around the world.

ASE (ALUMINUM SINGLE EYELETS)

Aluminum Eyelets reduce stress on the rim, are lighter and offer better vibration absorption than stainless steel. ASE eyelets are standard equipment on our top level rims.

SSE (STAINLESS SINGLE EYELETS)

First developed by Alex in 1995, SSE improves seating of the nipple head for a better built wheel.

SDE (STAINLESS DOUBLE EYELETS)

SDE was developed by ALEX back in 2000. SDE improves seating of the nipple head for a better built wheel.

EQUALIZER (RIM TECHNOLOGY)

By utilizing 0.5mm off center spoke drilling from the hub centerline our Equalizer technology allow for the use of equally tensioned spokes on both sides of the wheel. Equal length spokes at equal tension make for a super strong wheel that is perfectly balanced from side to side.


TRS (TUBELESS READY SYSTEM)


Many of our rims offer our TRS (Tubeless Ready System) technology. Simply install any tubeless compatible tire, rim strip, valve and sealant system for a complete tubeless solution.

TUBULAR 2.0

Sleeve Joint // Black
CSW

700C // 622x20 // 430g





TUBULAR DISC

Sleeve Joint // Black
SSE

700C // 622x24 // 445g








PRO35

Welded Joint // Black
CSW // TRS

700C // 622x17 // 490g
650C // 571x17 // 450g






PRO30

Welded Joint // Black
CSW // TRS

700C // 622x17 // 440g






PRO26

Welded Joint // Black
CSW // TRS

700C // 622x19 // 450g






CX35

Sleeve Joint // Black
CSW // TRS

700C // 622x17 // 490g
650C // 571x17 // 450g






CX30

Sleeve Joint // Black
CSW // TRS

700C // 622x17 // 475g






CX28

Sleeve Joint // Black
CSW // TRS

700C // 622x17 // 440g






CX26

NEW · SLEEVE · CSW · TRS TUBELESS READY

Sleeve Joint // Black
CSW // TRS
700C // 622x19 // 450g






CX24

SLEEVE · CSW · TRS TUBELESS READY

Sleeve Joint // Black
CSW // TRS
700C // 622x17 // 435g






R390

SLEEVE · CSW · SDE

Sleeve Joint // Black
CSW // SDE

700C // 622x13 // 470g
650C // 571x13 // 455g






DA22

SLEEVE · CSW · INDICATOR

Sleeve Joint // Black
CSW // Indicator

700C // 622x14 // 450g
650C // 571x14 // 415g






RACE38

PINNED · CSW · INDICATOR

Pin Joint // Powder Coating // Black
CSW // Indicator

700C // 622x15 // 620g






AT550

PINNED · CSW · TRS TUBELESS READY

Pin Joint // Powder Coating // Black
CSW // TRS

700C // 622x17 // 560g






AT510

PINNED · CSW · TRS TUBELESS READY

Pin Joint // Black
CSW // TRS

700C // 622x17 // 510g






AT505

PINNED · CSW · TRS TUBELESS READY · NEW

Pin Joint // Black
CSW // TRS

700C // 622x19 // 505g






AT490

PINNED · CSW · TRS TUBELESS READY

Pin Joint // Black
CSW // TRS

700C // 622x17 // 490g
650C // 571x17 // 450g






AT470

PINNED · CSW · TRS TUBELESS READY

Pin Joint // Black
CSW // TRS

700C // 622x17 // 475g






R450

PINNED

Pin Joint // Black
Option: CSW

700C // 622x14 // 470g
650C // 571x14 // 430g






GV30

SLEEVE · CSW · TRS TUBELESS READY · NEW

Sleeve Joint // Black
CSW // TRS
700C // 622x21 // 470g






GV24P

Pin Joint // Black
CSW // TRS
700C // 622x21 // 510g






RSD30

Sleeve Joint // Black
TRS

700C // 622x19 // 400g







GD30

Sleeve Joint // Black
TRS

700C // 622x21 // 460g
650B // 584x21 // 435g







GD24

Sleeve Joint // Black
TRS

700C // 622x21 // 450g







CXD22

Sleeve Joint // Black
TRS

700C // 622x17 // 410g






DRAW 1.9S

Sleeve Joint // Black
TRS // Equalizer

700C // 622x19 // 410g
650B // 584x19 // 390g






GD26P

Pin Joint // Black
TRS

700C // 622x21 // 500g






GD24P

Pin Join // Black
TRS

700C // 622x21 // 500g
650B// 584x21 // 465g






DRAW 2.1P

Pin Joint // Black
TRS // Equalizer

700C // 622x21 // 470g
650B // 584x21 // 450g






DRAW 1.9P

Pin Joint // Black
TRS // Equalizer

700C // 622x19 // 450g
650B // 584x19 // 430g






DRAW 1.7P

Pin Joint // Black
TRS // Equalizer

700C // 622x17 // 430g







ATD560

Pin Joint // Powder coating Black
TRS

700C // 622x19 // 560g






ATD550

Pin Joint // Powder Coating // Black
TRS

700C // 622x17 // 560g







ATD500

Pin Joint // Black
TRS

700C // 622x19 // 500g






ATD490

Pin Joint // Black
TRS

700C // 622x17 // 490g






ATD470

Pin Joint // Black
TRS

700C // 622x17 // 460g








SC PRO

Welded Joint // Black
ASE // Scandium // TRS

29” // 622x20 // 400g
650B // 584x20 // 380g
26” // 559x20 // 365g







EVO 2.3

Sleeve Joint // Black
ASE // 6A11 // TRS

29” // 622x23 // 485g
650B // 584x23 // 455g
26” // 559x23 // 435g






SPRK 2.1

Welded Joint // Black
SSE // TRS

29” // 622x23 // 450g
650B // 584x23 // 426g
26” // 559x23 // 410g






SPRK 2.5

Welded Joint // Black
SSE // TRS

29” // 622x25 // 512g







SPRK 2.7

Welded Joint // Black
SSE // TRS

650B // 584x27 // 485g






EXR30

Sleeve Joint // Black
SSE // TRS

700C // 622x30 // 550g
650B // 584x30 // 520g






EXR27 NEW

Sleeve Joint // Black
SSE // TRS

700C // 622x27 // 530g
650B // 584x27 // 500g






EXR25 NEW

Sleeve Joint // Black
SSE // TRS

700C // 622x25 // 515g
650B // 584x25 // 485g






VOLAR 2.3

Sleeve Joint // Black
SSE // TRS

29” // 622x23 // 465g
650B // 584x23 // 440g
26” // 559x23 // 420g






VOLAR 2.1

Sleeve Joint // Black
SSE // TRS

29” // 622x21 // 450g
650B // 584x21 // 426g
26” // 559x21 // 410g
24” // 507x21 // 380g






XD-LITE

Pin Joint // Black
SSE

29” // 622x18 // 480g
650B // 584x18 // 470g
26” // 559x18 // 440g





XD-ELITE

Pin Joint // Black
Option: SSE

29” // 622x19 // 490g
650B // 584x19 // 470g
26” // 559x19 // 440g
24” // 507x19 // 400g






MD30

Pin Joint // Black
SSE // TRS

29” // 622x30 // 605g
650B // 584x30 // 575g
26” // 559x30 // 545g
24” // 507x30 // 490g
20” // 406x30 // 390g






MD27

Pin Joint // Black
SSE // TRS

29” // 622x27 // 575g
650B // 584x27 // 542g
26” // 559x27 // 520g






MD25

Pin Joint // Black
SSE // TRS

29” // 622x25 // 545g
650B // 584x25 // 520g
26” // 559x25 // 490g






MD23

Pin Joint // Black
SSE // TRS

29” // 622x23 // 530g
650B // 584x23 // 500g
26” // 559x23 // 480g






MD21

Pin Joint // Black
SSE // TRS

29” // 622x21 // 500g
650B // 584x21 // 470g
26” // 559x21 // 450g






MD19

Pin Joint // Black
Option: SSE


29” // 622x20 // 500g
650B // 584x20 // 470g
26” // 559x20 // 450g





XT19






Sleeve Joint // Black
CSW // SSE // Indicator

29” // 622x19 // 500g
26” // 559x19 // 440g

G6000





Pin Joint // Black
CSW

29” // 622x17 // 620g
650B // 584x17 // 580g
26” // 559x17 // 575g

EN24






Pin Joint // Black
SSE
Option: CSW

29” // 622x19 // 500g
650B // 584x19 // 480g
26” // 559x19 // 465g




DH19






Pin Joint // Black
Indicator
Option: CSW
29” // 622x18 // 580g
26” // 559x18 // 520g

DM18






Pin Joint // Black
Option: CSW // Indicator

29” // 622x18 // 600g
650B // 584x18 // 530g
26” // 559x18 // 520g

X2200






Pin Joint // Black
Indicator
Option: CSW

29” // 622x19 // 510g
650B // 584x19 // 485g
26” // 559x19 // 460g

ACE19





Pin Joint // Black
CSW // SSE // Indicator

29” // 622x17 // 510g
26” // 559x17 // 490g

ACE18





Pin Joint // Black
Indicator
Option: CSW // SSE

29” // 622x17 // 500g
26” // 559x17 // 460g

DC19





Pin Joint // Black
Indicator
Option: CSW


29” // 622x16 // 530g
26” // 559x16 // 470g

VOLAR3.8

Sleeve Joint // Black
CSW // TRS

650B // 584x38 // 525g






XM35

Pin Joint // Black
TRS

29” // 622x35 // 550g
650B // 584x35 // 520g
26” // 559x35 // 495g






MD50

Pin Joint // Powder Coating // Black
TRS
Option: SSE

29” // 622x50 // 770g
650B // 584x50 // 720g
24” // 507x50 // 633g






MD40

Pin Joint // Black
TRS

29” // 622x40 // 625g
650B // 584x40 // 590g
24” // 507x40 // 520g
20” // 406x40 // 415g






MD35

Pin Joint // TRS // Black
Option: SSE

29” // 622x35 // 545g
650B // 584x35 // 525g
26” // 559x35 // 490g






BLIZZERK SL 90

Welded Joint // Black
TRS

26” // 559x84 // 750g






BLIZZERK 100

Rolling Pin Joint // PC Black
TRS

26” // 559x94 // 1042g






BLIZZERK 90

Pin Joint // PC Black
TRS

26” // 559x84 // 836g
24” // 507x84 // 770g
20” // 406x84 // 640g






BLIZZERK 80

Pin Joint // Black

26” // 559x73 // 830g







BLIZZERK 70

Pin Joint // PC Black
TRS

26” // 559x64 // 660g
650B // 584x64 // 740g






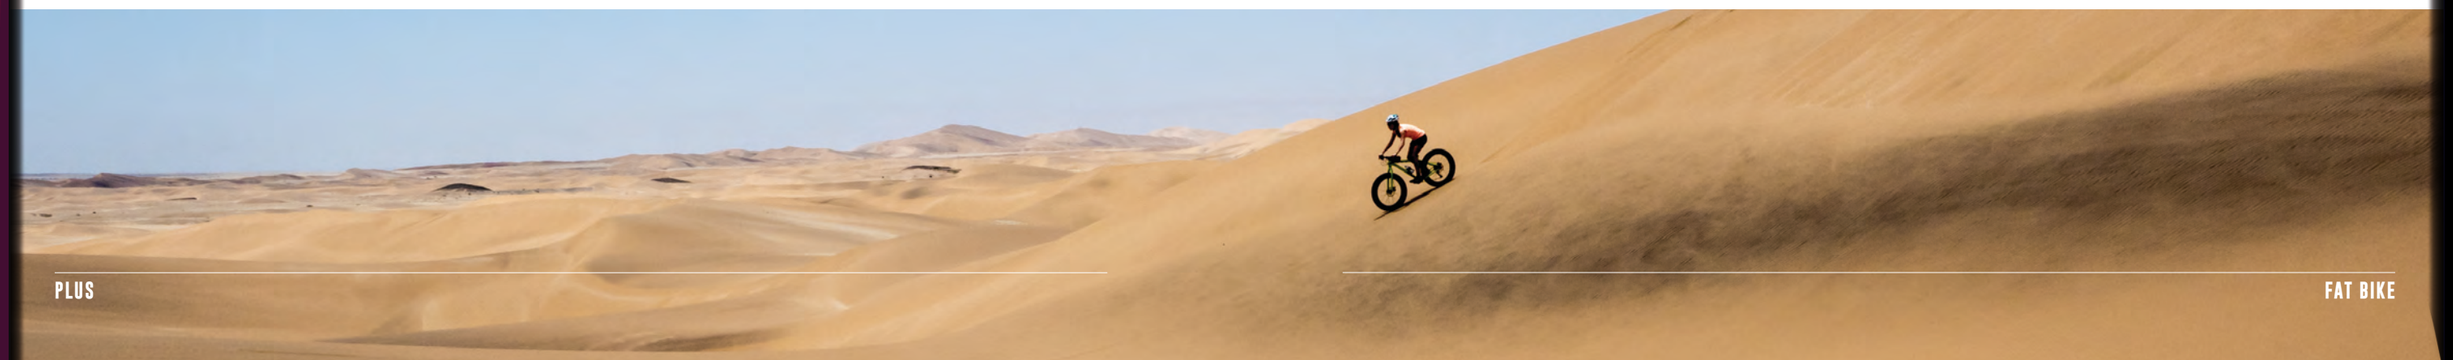

SUPRA35






Welded Joint // Black
SSE // TRS

29” // 622x30 // 650g
650B // 584x30 // 620g
26” // 559x30 // 580g

SUPRA D






Welded Joint // Black
SSE

26” // 559x25 // 570g

SUPRA BH






Pin Joint // Black
SSE

650B // 584x25 // 650g
26” // 559x25 // 610g
24” // 507x25 // 550g

DX32






Pin Joint // Black
Option: CSW // SSE

26” // 559x32 // 755g
24” // 507x32 // 650g
20” // 406x32 // 540g
19” // 381x32 // 510g

DM24






Pin Joint // Black
Indicator
Option: CSW // SSE

29” // 622x24 // 725g
26” // 559x24 // 665g
24” // 507x24 // 610g
20” // 406x24 // 480g
16” // 305x24 // 370g

VENGEANCE






Welded Joint // Black

20” // 406x28 // 420g

SUPRA DOME EX





Welded Joint // Black

20” // 406x26 // 440g

SUPRA DOME





Pin Joint // Black
Option: CSW


24” // 507x26 // 580g
20” // 406x26 // 450g

R390

Sleeve Joint // Black
CSW // SSE

24”x1 1/8 // 540x14 // 375g
24”x1.0 // 520x14 // 370g
20”x1 1/8 // 451x14 // 295g






DA22

Sleeve Joint // Black
Indicator
Option: CSW

24”x1.0” // 520x14 // 400g
18”x1.0 // 400x14 // 295g
20”x1 1/8 // 451x14 // 330g






R450

Pin Joint // Black
Option: CSW

24”x1.0” // 520x14 // 383g
20”x1 1/8 // 451x14 // 356g






ACE18

Pin Joint // Black
Indicator
Option: CSW // SSE

24” // 507x17 // 410g
20” // 406x17 // 325g






MD25

Pin Joint // Black
SSE // TRS

20” // 406x25 // 350g
18” // 355x25 // 308g






MD19

Pin Joint // Black
Option: SSE

24” // 507x20 // 390g
20” // 406x20 // 310g
18” // 355x20 // 280g
16” // 305x20 // 240g






DA16

Pin Joint // Black
Indicator
Option: CSW

20” // 406x16 // 380g
18” // 355x16 // 310g
16” // 305x16 // 260g







DM18

Pin Joint // Black, Silver
Indicator
Option: CSW // SSE

24” // 507x18 // 486g
20” // 406x18 // 380g








EM35 NEW

PINNED TUBELESS READY

Pin Join // Black // TRS

700C // 622x35 // 670g
650B // 584x35 // 633g






EM30 NEW

PINNED TUBELESS READY

Pin Join // Black // TRS
Option: CSW

29” // 622x30 // 670g
650B // 584x30 // 630g






EM23

PINNED TUBELESS READY

Pin Join // Black // TRS

700C // 622x23 // 574g
650B // 584x23 // 545g
26” // 559x23 // 522g






FR30

PINNED

Pin Joint // Black

29” // 622x23 // 550g
650B // 584x23 // 520g
26” // 559x23 // 495g






DM24

PINNED INDICATOR

Pin Joint // Black
Indicator
Option: CSW

29” // 622x24 // 725g
26” // 559x24 // 665g






DM21

PINNED INDICATOR

Pin Joint // Black
Indicator
Option: CSW

29” // 622x21 // 606g
26” // 559x21 // 546g






DM18

PINNED INDICATOR

Pin Joint // Black
Indicator
Option: CSW

29” // 622x18 // 600g
650B // 584x18 // 530g
26” // 559x18 // 520g






DH19

PINNED INDICATOR

Pin Joint // Black
Indicator
Option: CSW

29” // 622x18 // 580g
26” // 559x18 // 520g






EV23

PINNED TUBELESS READY INDICATOR

Pin Joint // Black // TRS
Indicator
Option: CSW// TRS

700C // 622x23 // 595g
26” // 559x23 // 540g






ADVENTURER2

PINNED TUBELESS READY

Pin Joint | Black | TRS
Option: CSW

29” // 622x21 // 570g
650B // 584x21 // 530g
26” // 559x21 // 500g








ALEXRIMS
FOR THE WAY YOU RIDE