CANE CREEK SHOCK WORKSHEET


COMPLETE AND RETURN TO FAX NUMBER 828-684-1057

COMPANY:	BIKE MAKE:
CONTACT:	BIKE MODEL:
PHONE:	YEAR:
FAX:	LEVERAGE RATIO:

AD-5 AND AD-12
STANDARD SIZES
(LENGTH / TRAVEL)

132 / 26
135 / 29
140 / 34
152 / 26
165 / 38
190 / 50
200 / 51

GENERAL DIMENSIONS
(MILLIMETERS)

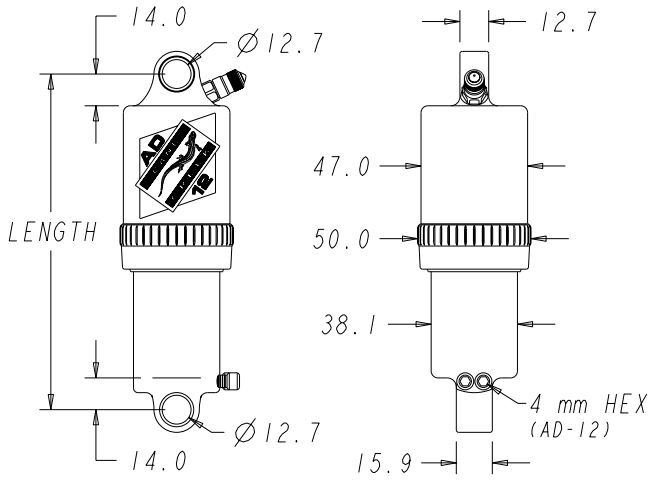

DESIRED MODEL

☐ **AD-5**
☐ **AD-12**


LENGTH =


TRAVEL =


FRAME SKETCH

FRAME AND LINKAGE INFORMATION IS CRUCIAL FOR OPTIMAL TUNING AND FITMENT. PLEASE SKETCH FRAME GEOMETRY INCLUDING AS MUCH DETAIL AS POSSIBLE. SHOW PROPOSED SHOCK ORIENTATION WHILE CONSIDERING NECESSARY CLEARANCES FOR AIR VALVE AND ADJUSTMENT KNOB ACCESS.





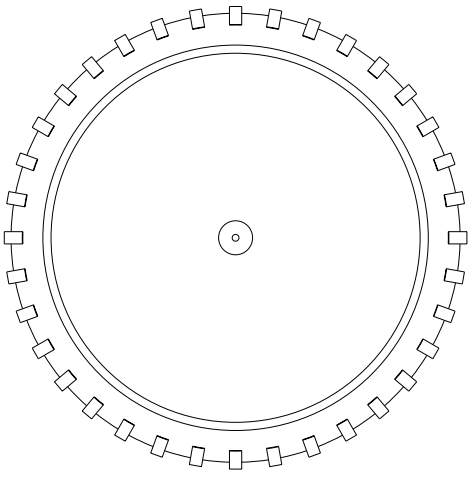


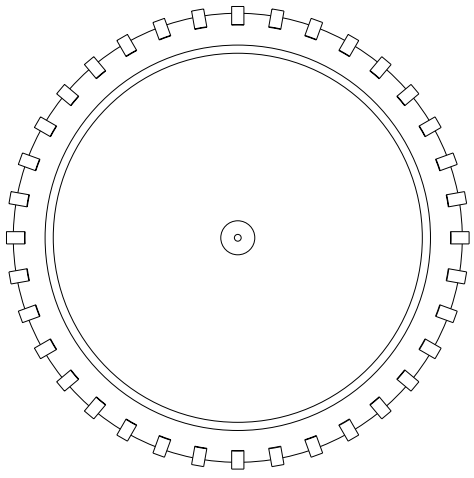

5/5/05

MOUNTING ORIENTATION OPTIONS


SELECT NUMBER

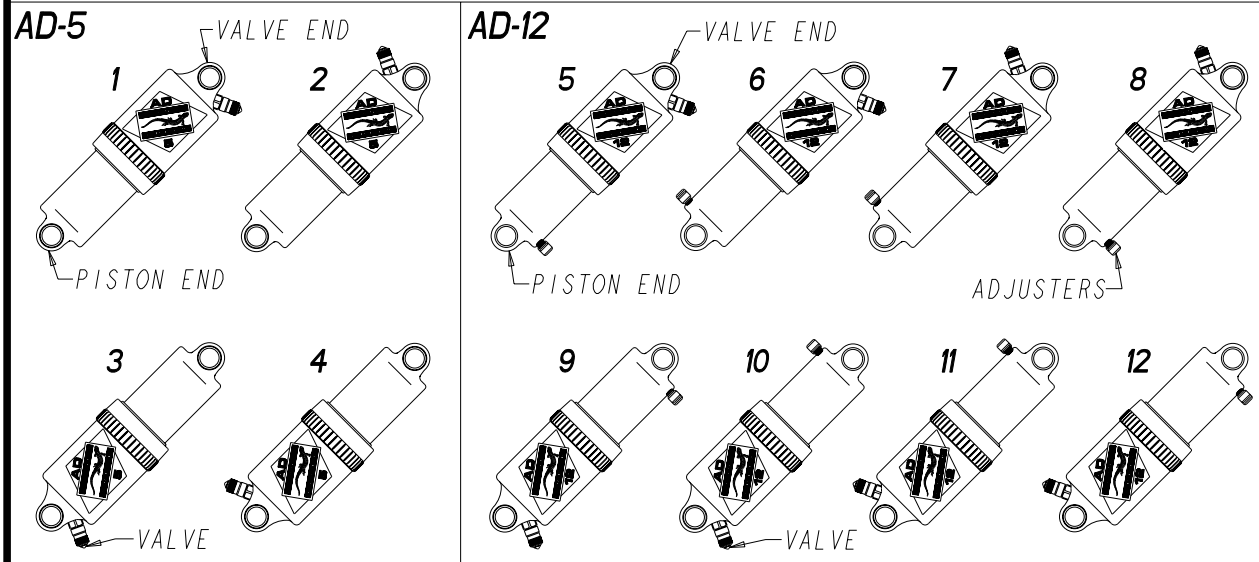

VALVE CONFIGURATION OPTIONS


SELECT NUMBER

1. STRAIGHT, 2. LEFT, 3. RIGHT, 4. EITHER (left or right), 5. DOWN

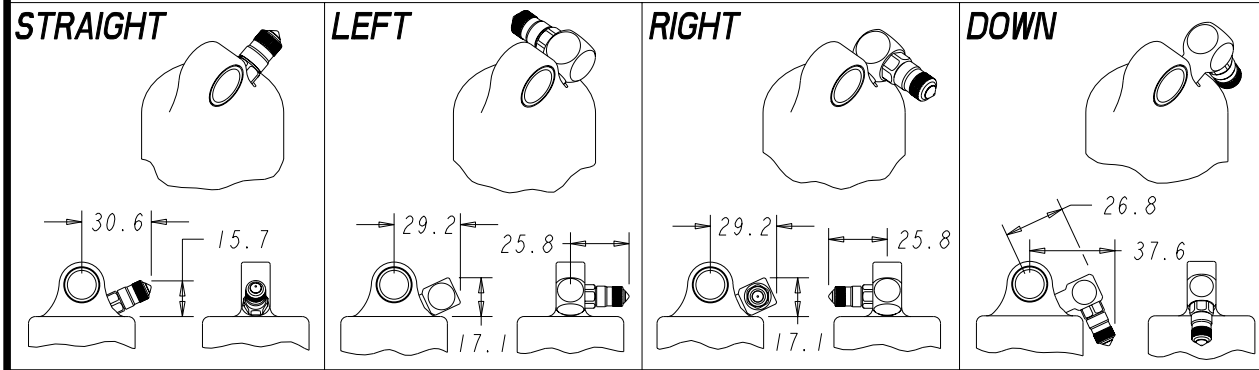


MOUNTING CONFIGURATION OPTIONS

SPECIFY SIZE BELOW

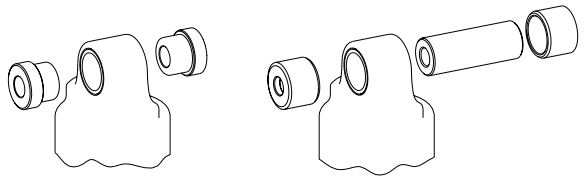

NARROW MOUNT (LESS THAN 29 mm)

WIDE MOUNT (GREATER THAN 29 mm)

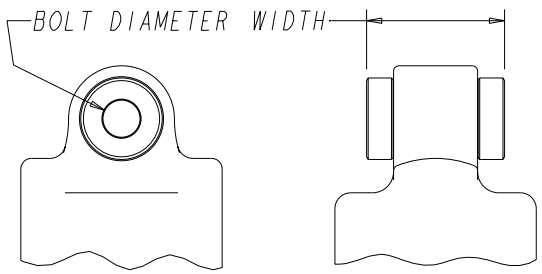

STANDARD SIZES

VALVE END		PISTON END	
WIDTH	BOLT	WIDTH	BOLT
22.00±.10	6 mm	22.00±.10	6 mm
22.00±.10	8 mm	22.00±.10	8 mm
28.00±.10	8 mm	28.00±.10	8 mm
38.00±.15	8 mm	38.00±.15	8 mm
50.00±.15	8 mm	50.00±.15	8 mm

VALVE END		PISTON END	
WIDTH	BOLT	WIDTH	BOLT

5/5/05