
DIRECT CURVE Brake Lever Instructions

Tools needed for Installation
- 5 mm hex key
- 2 mm hex key

Lever Installation
Clamp the levers R (right) and L (left) to the handlebar with a 5 mm hex key. Final tightening torque: 6-9Nm.

Cable Installation
Place the brake cable nipple firmly into the nipple socket of the brake lever (located on the backside of the lever). Pass the brake inner cable through the grooves in the lever bracket, as well as through the grooves of the barrel adjuster and lock nut. Set the adjusting barrel so as to enable later adjustment. Ensure that the brakes are properly installed, attaching the brake cable to the brakes per the brake instructions.

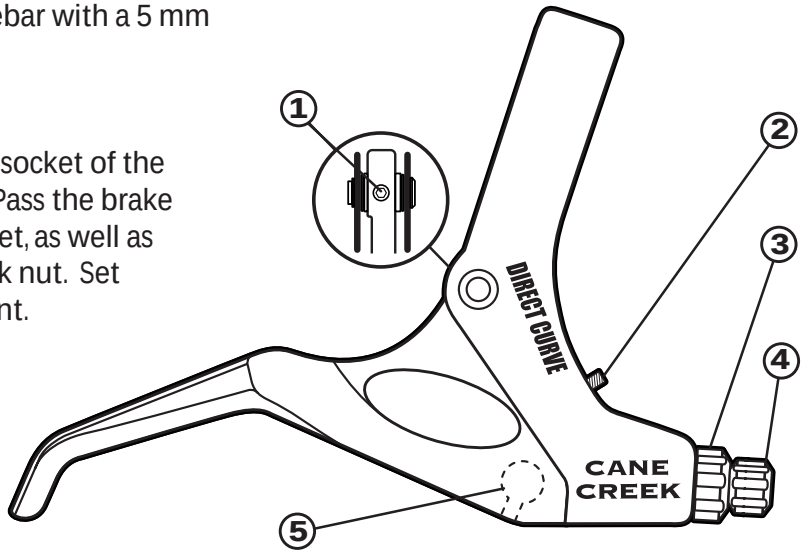

1. *Pivot Wear Adj. Screw (2mm)*
2. *Reach Adjustment Screw (2mm)*
3. *Barrel Adjuster Lock Nut*
4. *Barrel Adjuster*
5. *Cable Nipple Socket*

Fine tuning/adjustment
Test the lever by depressing it a few times. Turn the adjusting barrel to recommended pad/rim clearance (1mm each side for most brakes). A reach adjuster (2 mm hex located on the lever bracket) is provided to enable adjustment of the distance of the lever handle to the handle bar. The Direct Curve levers also have a pivot wear adjustment feature (2 mm hex located perpendicular to the pivot) that allows tightening of the lever pivot as it wears.

CAUTION: Direct Curve brake levers must be used with linear pull brakes only (sometimes referred to as "long arm or side-pull" brakes). Linear pull brakes offer considerable braking power with little leverage force and require practice at low speeds before normal use. Cane Creek Cycling Components is not liable for damage or injury as a result of improper installation or use.

WARRANTY
Cane Creek Cycling Components warrants its bicycle components for a period of two years from the original date of purchase. Any Component that is found to be defective in materials or workmanship will be repaired or replaced at the discretion of Cane Creek. This warranty applies to the original owner only. This warranty does not cover damage or failure resulting from misuse, abuse, alteration, neglect, wear and tear, crash or impact, lack of maintenance or other conditions judged by Cane Creek to be abnormal, excessive, or improper. It is mandatory that a Return Authorization Number (RA#) is obtained by calling Cane Creek before any product is returned. Additionally, a dated Proof of Purchase must accompany the product when returned. (Revised 4.10.2002)

Cane Creek Cycling Components • 355 Cane Creek Road • Fletcher, NC 28732
ph: 828.684.3551 • *fax:* 828.684.1057 • *web:* www.canecreek.com • *e-mail:* info@canecreek.com