Well renowned in the cycling world, Nishiki bicycles have achieved a reputation for excellence, in innovation, quality and performance.

The 1989 line represents our continued commitment to excellence. There are no compromises here, only the finest frame materials and components are used in the construction of Nishiki bicycles.

Each mountain and road bike has benefited from the technological breakthroughs made through the efforts of Suntour and Shimano. These two world leaders in component design and manufacturing



Smooth functioning full chro-moly roller stem with flat racing bar.

SPECIFICATIONS	ALTRON 7000	LANDAU TRI-A	SILHOUETTE
FRAME SIZES	50 cm, 54cm, 56cm, 60cm	19", 21", 23", 25"	19.5", 21", 23", 25"
FRAME MATERIAL (main triangle)	Kawamura T-7000 aluminum tubing. Lightweight, super stiff. Made in Japan.	Japanese Tange chro-moly double butted racing frame. Exciting new colour fades. New Mono stay design.	Tange chro-moly tubing with race frame geometry. Mono stay design. Made in Japan.
REAR STAYS	T-7000 light-alloy. Fast Back.	Hi-tensile Mono stay.	Hi-tensile Mono stay.
FORK	Full chro-moly.	Chro-moly unicrown.	Hi-tensile uni type.
HEADSET	Shimano 600 Ultegra.	Shimano 105.	Hatta chrome-plated 10-speed type.
HANDLEBARS	Nitto drop anatomic style.	Kusuki light-alloy drop style.	Kusuki drop style.
STEM	Nitto light-alloy.	Kusuki light-alloy.	Kusuki light-alloy 60/80/100mm.
HANDLEBAR TAPE/GRIPS	Padded fleck or shade tape.	Padded fleck or shade tape.	Padded fleck or shade tape.
SADDLE	Vetta mundial leather.	Vetta mundial racing saddle.	Vetta mundial vinyl.
SEAT POST	SR 27.2mm light-alloy.	SR light-alloy.	SR light-alloy.
SHIFT LEVERS	Shimano 600 Ultegra 7-speed.	Shimano 1051 7-speed SIS.	Shimano Sport LX 7-speed SIS.
FRONT DERAILLEUR	Shimano 600 Ultegra.	Shimano 105.	Shimano Sport LX.
REAR DERAILLEUR	Shimano 600 Ultegra 7-speed.	Shimano 1051 7-speed SIS.	Shimano Sport LX 7-speed SIS.
FREEWHEEL	Shimano 12-21T 7-speed cassette.	Shimano 13-24T 7-speed cassette.	Shimano 13-26T 7-speed cassette.
CRANK SET	Shimano Ultegra light-alloy 165/170mm crank with 42/53T light-alloy hi-performance Bio-Pace rings.	Shimano 1051 with 42-52T Bio-Pace "Race" light-alloy chainrings. (165/170mm x 9/16"). Blue finish.	Shimano Exage Action. 170mm light-alloy cranks with 40/52T steel black Bio-Pace rings.
BRAKE CALIPERS	Shimano 600 Ultegra light-alloy side-pull.	Light action Shimano 1051. Aero type brake pads with tire guides.	Shimano Exage Action light-alloy side-pull calipers.
BRAKE LEVERS	Shimano Ultegra Aero levers with SLR.	Shimano 1051 Aero type with internal springs (lined cables).	Shimano Exage Action light-alloy Aero levers.
PEDALS	Shimano 600 Ultegra.	Shimano 1051 with toe clips.	Shimano Sport LX.
CHAIN	Shimano 1/2 x 3/32" uniglide narrow.	Shimano uniglide (1/2" x 3/32").	Shimano 1/2 x 3/32" uniglide.
HUBS	Shimano 600 Ultegra quick release with 7-speed rear.	Shimano 1051 light-alloy, small flange. quick release. Blue finish. Cassette.	Shimano quick release Sport LX with 7-speed cassette.
SPOKES	14 Gauge stainless with brass nipples.	14 Gauge with brass nipples.	14 Gauge with brass nipples.
RIMS	Araya 700C light-alloy. (SS-45)	Araya 700C 36 hole anodized.	Araya 700C light-alloy. (SS-45)
TIRES	Panaracer 700 x 25C Technova II dual slicks.	Panaracer 700 x 25C Technova II dual slick/tread design.	Panaracer 700 x 25C Technova II dual hardness.
WEIGHT	23 lbs.	23lbs.	26 lbs.
COLOUR	Red/Orange/Yellow.	Blue/Black, White/Fuschia/Blue, Red/White/Black.	Fuschia/Black, White/Black, Dayglow Green/Blue.
MISC.	Chain hanger, cable guides and pump peg braze-ons with reflectors.	Braze-ons include: 2 water cage mounts and chainhook, with reflectors.	Reflectors included.

INTERNATIONAL

This top quality chro-moly Japanese manufactured touring bike utilizes Suntour's Edge components and is outfitted with a wide assortment of rack, fender and H2O braze-ons. The long wheel base and shallow angles contribute to a stable responsive ride even when fully loaded with touring gear. Heavy duty stopping power is supplied by Dia-Compe touring cantilevers. The super durable 40 hole rear wheel is designed for load carrying and the Panaracer 700 x 28C dual hard tires deliver superb traction and puncture resistance.

ACCUSHIFT



RALLY MENS

A durable hi-tensile road bike featuring Shimano's new 10-speed SIS index shifting. Intended for all-round recreational use the Rally features long lasting 27 x 1-¼" gumwall tires, high quality SR alloy cranks, reliable Chang Star brakes with safety levers, stylish padded fleck handlebar tape with matching saddle cover, Q/R front hub, and light weight Araya alloy rims. See one soon at your local Nishiki dealer.


SIS



have developed and refined 7-Cog indexing systems. This new development has made 14-speed road bikes and 21-speed mountain bikes a reality.

Complimenting these bicycles is a dazzling array of distinctive finishes ranging from subtle one-tone finishes to brilliant day glow fades.

Nishiki . . . breaking new ground on and off road.

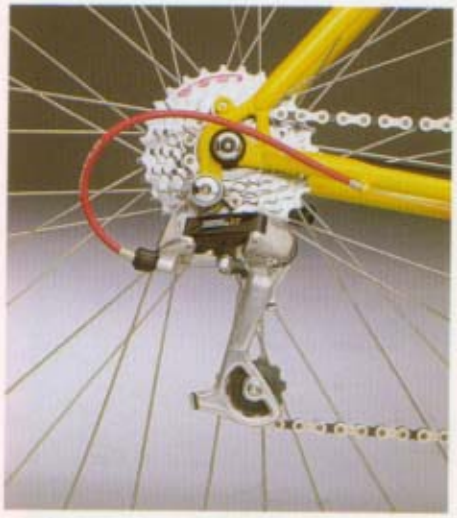

New Shimano Deore XT II 7-speed rear derailleur featuring the Hyperglide system.



New mono stay, featured on many road and mountain models produces a stiff, aerodynamic rear triangle.

OLYMPIC TRI-A	INTERNATIONAL	LINEAR	RALLY
19", 21", 23", 25"	19", 21", 23", 25"	19" 21", 23", 25"	Men's: 19", 21", 23", 25" Ladies': 19", 21"
Tange chro-moly tubing with race frame geometry. Double butted with forged dropouts. Made in Japan.	Tange #900 chro-moly tubing with full braze-ons, and two-tone paint. Double butted with forged dropouts. Made in Japan.	3-tube chro-moly, fully lugged racing style frame. Super durable, performance frame set.	Fully lugged Hi-tensile 10-speed frames available in men's or ladies' frame configurations.
Hi-tensile (Tange).	Hi-tensile.	Hi-tensile.	Hi-tensile .
Hi-tensile.	Spinner chro-moly with canti studs.	Spinner Hi-tensile.	Spinner Hi-tensile with eyelets.
Chrome-plated 10-speed type.	Hatta Vesta sealed mech.	Chrome-plated 10-speed type.	Chrome-plated 10-speed headset.
Kusuki light-alloy road style.	Kusuki Randonneur light-alloy.	Chrome-plated steel with alloy sleeve.	Steel road bars with alloy sleeve.
Kusuki light-alloy 60/80/100mm.	Kusuki light-alloy.	Light-alloy 80mm. 100mm on 23", 25".	Delta light-alloy 60mm.
Padded fleck or shade tape.	Padded fleck or shade tape.	Padded fleck tape.	Padded fleck tape.
Vetta mundial vinyl.	Vetta Gel touring saddle	Anatomic vinyl.	Anatomic vinyl.
SR light-alloy.	SR 300mm light-alloy.	230mm light-alloy.	Chrome-plated steel.
Shimano A-452 SIS downtube.	Suntour XCE 4050 downtube Accushift.	Shimano 434 SIS clamp type.	Shimano 10-speed SIS stem shifters.
Shimano A-250 regular.	Suntour XCE 4050 long cage.	Shimano short cage.	Shimano short cage.
Shimano A-250 SIS.	Suntour XCE 4050 long arm.	Shimano 554 SIS short arm.	Shimano SIS short arm.
Shimano 14-26T SIS 6-speed.	Suntour Alpha 13-30T 6-speed.	Shimano 14-26T 6-speed SIS.	Shimano 14-28T 5-speed SIS.
Shimano A-250 light-alloy cranks with 40-52T steel Bio-Pace chainrings.	SR SXC T-302 light-alloy with 28/44/50T oval tech alloy rings. Sealed mech B.B.	SR-CTC-626 170mm alloy crank arms with 40-52T steel. Built-in chainguard.	Sakae CTC-626 170mm alloy crank arms with 40-52T steel rings. Built-in chainguard.
Shimano A-250 SLR side-pull light-alloy.	Dia-Compe #962 light-alloy cantilever type.	Lee Chi 500 light-alloy side-pull with quick release.	Chang Star 500 light-alloy side-pull.
Shimano A-251 SLR light-alloy Aero levers.	Dia-Compe regular levers with balance response system.	Lee Chi light-alloy Aero levers.	Chang Star 164 light-alloy with safety levers.
Nylon platform pedals with reflectors.	MKS touring pedal with reflectors.	Quill racing with reflectors.	Victor steel with reflectors.
Shimano 1/2 x 3/32" uniglide.	Izumi 1/2" x 3/32" index chain.	KMC 1/2 x 3/32" uniglide.	KMC uniglide SIS.
Sansin light-alloy sealed mechanism small flange, quick release	Sansin small flange, light-alloy sealed mech. quick-release. Rear is 40H.	Light-alloy hubs with quick release front and sealed mech.	Chrome-plated steel hubs.Front is quick release
14 Gauge with brass nipples.	14 Gauge UCP with brass nipples.	14 Gauge UCP coated.	14 Gauge UCP coated.
Araya SP-20 700C light-alloy.	Araya 700C light-alloy (16A-3).	Araya light-alloy 27 x 1-1/4" rims.	27 x 1-1/4" light-alloy.
700 x 25C skinside. Tubes use Presta valve.	Panaracer 700 x 28C dual hardness skinwall tires.	27 x 1-1/4" gumwalls.	27 x 1-1/4" gumwall.
26 lbs.	25.5 lbs.	28.5 lbs.	Men's: 31 lbs. Ladies': 31 lbs.
Yellow/Red, White/L. Blue/D. Blue, Blue/Red/White.	Blue/Grey, Black/Red.	Wht/Red spot, Wht/Purple spot, Black/Fuschia spot, Blue one-tone.	M: Blk/Fuschia, Wht/Red, Blue, Red/Wht L: Turq/Wht, Blue/Wht, Wht/Fuschia.
Reflectors included.	Complete with full braze-ons and a stainless chainstay cover with reflectors.	Cable guide and cable stop braze-ons. With reflectors.	Braze-on cable guides, and cable stops. With reflectors.