1997

CATALOG



SR SUNTOUR



SIERRA magic

Suspension Forks (**Sierra Magic**) (**Duo Track**)

MODEL NO.		9007-M			9007			8007			7007-26		7007-700	7007-24
Suspension System		MCU Elastomer			Elastomer			Elastomer			Elastomer/Spring		Elastomer/Spring	Elastomer/Spring
Adjustable		O			O			O			-		-	-
Replaceable		O			O			O			O		O	O
Blade Travel		70mm			55mm			55mm			40mm		40mm	35mm
Setting Size Code		JS	BS	TS	JS	BS	TS	JS	BS	TS	JS	TS	JS	JS
Crown Race Dia (mm)		27.0	26.4	30.0	27.0	26.4	30.0	27.0	26.4	30.0	27.0	30.0	27.0	27.0
Steerer Outer Dia (mm)		25.4		28.6	25.4		28.6	25.4		28.6	25.4	28.6	25.4	25.4
Steerer Inner Dia (mm)		22.2		25.4	22.2		25.4	22.2		25.4	22.2	25.4	22.2	22.2
Thread Dimension		1"*24T		1-1/8"*26T	1"*24T		1-1/8"*26T	1"*24T		1-1/8"*26T	1"*24	1-1/8"*24T	1"*24T	1"*24T
Thread Length		55/30 mm			55/30 mm			55/30 mm			55/30 mm		55/30 mm	55/30 mm
Steerer Material		CrMo			CrMo			CrMo			HI-TEN		HI-TEN	HI-TEN
Standard Steerer Length		150/180/210 mm			150/180/210 mm			150/180/210 mm			150/180/210 mm		150/180/210 mm	150 mm
Threadless Steerer Length		255mm			255mm			255mm			255mm		255mm	
Fork Rake		39mm			39mm			39mm			43mm		43mm	43mm
Brake Arch Height		346mm			346mm			346mm			346mm		376mm	321mm
Brake Pivot Width		79mm			79mm			79mm			79mm		79mm	79mm
Max. Tire Width		2.2"			2.2"			2.2"			2.1"		45C	2.1"
Wheel Dia.		26"			26"			26"			26"		700C	24"
Crown	Material	Aluminum			Aluminum			Aluminum			Aluminum		Aluminum	Aluminum
	Color	Hi-Polish			Hi-polish			Barrel			Barrel		Barrel	Barrel
Arch	Material	Aluminum			Aluminum			Aluminum			Aluminum		Aluminum	Aluminum
	Color	Hi-Polish			Hi-polish			Paint			Paint		Paint	Paint
Blade	Material	Aluminum			Aluminum			Aluminum			Aluminum		Aluminum	Aluminum
	Color	Gray Anodized			Silver Anodized			Paint			Paint		Paint	Paint
Dust Boot Color		Black			Black			Black			Black		Black	Black
Weight (150mm)		1520g			1550g			1550g			1790g		1845g	1720g

F-SUSPEN-4.HHD F-SUSPEN-4.HHD

Plug & Play

DuoTrack

7007



7007-A

8007

CS-PF22-S8





CW-AP45-HP



TS-ET45-R8/L3

FD-AP45-GXH



RD-AP45-GXB

GIGA 450 series components

Giga 450

MODEL NO.	SPECIFICATIONS	FEATURES
RD-AP45-GXB	Plug & Play. 8/7 speed Total capacity: 39T. Max rear sprocket: 28T	Super light operation
FD-AP45-GXH FD-TP45-GXH	Plug & Play. Clamp dia: 31.8/34.9 mm Capacity: 22T. Max outer chainring: 42T	Level swing. Easy adjust. Super light operation Top pull mechanism (FD-TP45)
TS-ET45-R8/L3	Plug & Play. 8 speed Twist shifter with alloy brake lever	Index system. Auto-return function Window-type indicator
CS-PF22-S8	Plug & Play. 8 speed. 11-28T. Satin finish (S8)	PowerFlo rear. Index
CW-AP45-HP CW-AP45-HPG	Plug & Play. 42T (alloy,anodized), 32/20T, 32/22T (steel,satin) Crank length: 170/175 mm. Hi-polish. Chain Line: 47.5 mm Alloy fixing bolt, interchangeable	PowerFlo front. Index Option: with chainguard (HPG) Capless bolt included

CS-PF22-K8





CW-AP35-HF



RD-AP35-GXB



TS-ET45-R8/L3



FD-TP35-GXH

GIGA 350 series components

Giga 350

MODEL NO.	SPECIFICATIONS	FEATURES
RD-AP35-GXB	Plug & Play. 8/7 speed Total capacity: 39T. Max rear sprocket: 28T	Super light operation
FD-AP35-GXH FD-TP35-GXH	Plug & Play. Clamp dia: 31.8/34.9 mm Capacity: 20T. Max outer chainring: 42T	Level swing. Easy adjust. Super light operation Top pull mechanism (FD-TP35)
TS-ET45-R8/L3	Plug & Play. 8 speed Twist shifter with alloy brake lever	Index system. Auto-return function Window-type indicator
CS-PF22-K8	Plug & Play. 8 speed. 11-28T. Black finish (K8)	PowerFlo rear. Index
CW-AP35-HF CW-AP35-HFG	Plug & Play. 42T (steel,satin), 32/22T, 34/24T (steel,black) Crank length: 170/175 mm. Hi-polish. Chain Line: 47.5 mm Stainless steel fixing bolt, interchangeable	PowerFlo front. Index Option: with chainguard (HFG) Capless bolt included

Plug & Play

XR250 series components

CS-PF22-K7



CW-CH26-HF





TS-ET26-R7/L3



RD-XR26-GXB



FD-XR26-GXH



CW-CH20-AB

XR 150 series components



FW-PF12-K7



CW-XR16-PX



RD-XR16-GXB




RD-XR16-GXZ



TS-ET11-R7/L3



FD-XR16-GXH

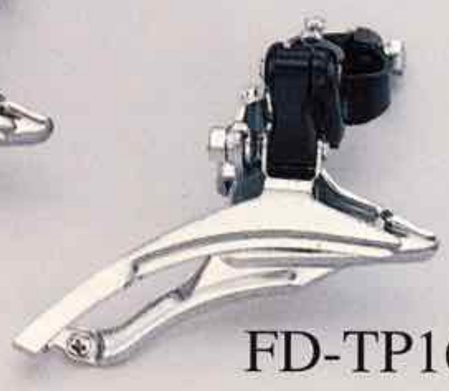

FD-TP16-GXH



TS-SX16-R7/L3

Plug & Play



SX50
series components

	MODEL NO.	SPECIFICATIONS	FEATURES
XR-250	RD-XR26-GXB	Plug & Play. 7 speed Total capacity: 38T. Max rear sprocket: 28T	Super light operation
	FD- XR26-GXH FD-TP26-GXH	Plug & Play. Clamp dia: 28.6/31.8 mm Capacity: 18T. Max outer chainring: 42T	Super light operation Top pull mechanism (FD-TP26)
	TS-ET26-R7/L3	Plug & Play. 7 speed Twist shifter with alloy brake lever	Index system. Auto-return function Window-type indicator
	CS-PF22-K7	Plug & Play. 7 speed. 12-28T. Black finish	PowerFlo rear. Index
	CW-CH26-HF CW-CH26-HFG	Plug & Play. 42T (steel,satin), 34/24T (steel,black) Crank length: 170/175 mm. Hi-finish. Chain Line: 47.5 mm Steel fixing bolt, interchangeable	PowerFlo front. Index Option: with chainguard (HFG) (ABG)
	CW-CH20-AB CW-CH20-ABG	Plug & Play. 42/34/24T (steel,black). Riveted Crank length: 170mm. Barrel finish. Chain Line: 47.5 mm	
XR-150	RD-XR16-GXB RD-XR16-GXZ	Plug & Play. 7 speed Total capacity: 38T. Max rear sprocket: 28T	Lite spring GXB: without bracket. GXZ: with bracket
	FD-XR16-GXH FD-XR16-GTH FD-TP16-GXH FD-TP16-GTH	Plug & Play. 7 speed Capacity: 18T. Max outer chainring: 42T Clamp dia: 28.6/31.8 mm	Top pull mechanism (FD-TP16) GXH: for chainstay angle 66°~69° GTH: for chainstay angle 63°~66°
	TS-SX16-R7/L3	Plug & Play. 7 speed. Twist shifter without brake lever	Index system. Window-type indicator
	FW-PF12-K7	Plug & Play. 7 speed. 13-28T. Black finish	PowerFlo rear. Index
	CW-XR16-PX CW-XR16-PXG	Plug & Play. 42/34/24T (steel,black). Riveted Crank length: 170mm. Painted. Chain Line: 47.5 mm	PowerFlo front. Index Option: with chainguard (PXG)
	Option: TS-ET11-R7/L3	Plug & Play. 7 speed. Twist shifter with steel/resin composite brake lever	Index system. Window-type indicator
SX-50	RD-SX05-SSZ RD-SX05-GXZ RD-SX05-SSZM	Plug & Play. 6/7 speed Total capacity: 25T (SSZ,SSZM), 38T (GXZ) Max rear sprocket: 28T	Direct pull mount
	FD-SX05-GXH	Capacity: 20T. Max outer chainring: 48T. Clamp dia: 28.6/31.8 mm	
	TS-SX05-R6/L	Plug & Play. 6 speed. Twist shifter without brake lever	Rear: index. Front: friction. Color sticker indicator
	SL-XRO5-R7/L3 SL-XRO5-R7/L SL-XRO5-R6/L3 SL-XRO5-R6/L	Plug & Play. 6/7 speed Thumb shifter	L3 = index L = friction Window-type indicator
	FW-PF12-K6	Plug & Play. 6 speed. 14-28T. Black finish	PowerFlo rear. Index
	CW-XR10-PX CW-XR10-PXG	Plug & Play. 48/38/28T (steel,black). Riveted Crank length: 170mm. Painted. Chain Line: 47.5 mm	PowerFlo front. Index Option: with chainguard (PXG) (ABG)
	CW-XR02-AB CW-XR02-ABG	52/42T (steel,black). Riveted. Crank length: 170mm. Barrel finish. Chain Line: 45.5 mm	
	CW-XR01-AB CW-XR01-ABG CEC-571-AB CEC-571-ABG	46T or 42T (steel,black) Crank length: 170mm. Barrel finish. Chain Line: 45.5 mm	
	GP-SX05 GP-XR10 GP-SX10	Handlebar grip LH & RH Kraton rubber	For twist shifter

Plug & Play

SR SUNTOUR

A World Leader in Bicycle Equipment

SR SUNTOUR

TAIWAN

No. 7, Hsing Yeh Road, Fu Hsing Industrial Zone, Chang Hua,
Taiwan, R.O.C.
Tel: 886-(0)4-769-5115 Facsimile: 886-(0)4-769-4028

JAPAN

●Someya Bldg., 4F 3-1-8, Kita Kashiwa, Kashiwa-shi, Chiba, Japan
Tel/Facsimile: 81-(0)471-63-5074
●Fudou Bldg., 2F, 472-1, Namikata, Tondabayashi-shi, Osaka, Japan
Tel/Facsimile: 81-(0)721-35-2551

EUROPE

Chaussee de Tervueren, 43, 1410 Waterloo, Belgium
Tel: 32-(0)2-354 46 76 Facsimile: 32-(0)2-354 78 35

Distributors

Specifications are subject to change without notice.

Catalog design by Conviva Marketing Tel: 886 4 2592611 Fax: 886 4 2557827