KALLOY INDUSTRIAL CO., LTD (TAIWAN)
No.186, Dazhou Rd., Shengang Dist.,
Taichung City 429, Taiwan
Tel +886 4 2525 0555
Fax +886 4 2527 4838

AK TECH CO., LTD (CHINA)
Puxin Road, Puxin Village, Lilin Town,
Zhongkai High-tech District, Huizhou City
Tel +86 752 3869858
Fax +86 752 3868577

KING-WAY CO., LTD (VIETNAM)
Lot No.8-3, 8-4 Road 3A,
Protrade International Tech Park,
An Tay Ward, Ben Cat City,
Binh Duong Province, Vietnam.
Tel +84 274 3515718
Fax +84 274 3515698

www.kalloyuno.com

© **2026** Kalloy Industrial Co.,Ltd. All rights reserved. The UNO are registered trademarks of Kalloy Industrial Co.,Ltd.
Specifications are subject to change for improvement without notice.

CONFIGURE WITH UNO

2026





UNO

Since 1980, Kalloy Taiwan has been a leading manufacturer of excellent quality aluminum components now. In addition to OE bicycle parts of stem, seatpost, handlebar and others, Kalloy makes leisure and sporting goods to the same unrelenting professional standards, like sporting E-wheelchair, walking stick, etc.

We select high grade materials including carbon fibers and aluminum and constantly upgrade our manufacturing and production skills.

Behind our manufacturing success and the support of China factory, funded in FEB 1993, lie a strenuous commitment to create, as artists, components of real and lasting value which undoubtedly satisfy our customers throughout the world. Now, especially to meet the demand of EU customers with dumping issue, the Vietnam factory is also under construction.

Whether your choice of components is 3D forged, melt forged or cold forged, you will be impressed by the precision and workmanship of the products in UNO.

Skilled spectra analysis and dynamic bump tests ensure the best quality possible.

In keeping with the Kalloy spirit, we focus on guaranteed quality and excellent customer service remains unchanged.

UNO

www.kalloyuno.com

CONTENTS

02 STEM
17 ADJUSTABLE STEM
22 SEATPOSTS
37 FLARED BAR
40 DROP BAR
46 RISE BAR
50 FLAT BAR
54 CITY & OTHERS
60 BARENDS
62 CLAMPS
66 I.C.R. Series
70 KIDS & JUNIOR Series
72 UBS Series
74 HD Series

VIETNAM
78 STEM
80 ADJUSTABLE STEM
82 SEATPOSTS
84 HANDLE BAR
90 CLAMPS

UNO®

RIGID
ADJUSTABLE
FOLDABLE



RAF

www.kalloyuno.com



OPTIMAL STIFFNESS CONSTRUCTION

ASA106

ISO 4210 - R/M approved
EN 17404

3D forged, 7050-T6 aluminum
Ext.: 60/70/80/90/100/110/120/130mm
Angle: +/-7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 116g(100mm)



OPTIMAL STIFFNESS CONSTRUCTION

ASA105
ASA105N

ISO 4210 - R/M approved
EN 17404

3D forged, 7050-T6 aluminum
Ext.: 60/70/80/90/100/110/120/130mm(+/-7degree)
80/90/100/110/120/130mm(+/-17degree)
Angle: +/-7degree , +/-17degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 98g(ASA105 80mm)
100g(ASA105N 80mm)



ASA105



ASA105N





OPTIMAL STIFFNESS CONSTRUCTION

AS029

ISO 4210 - R/M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120/130mm
Angle: +/-7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 117g(90mm)



OPTIMAL STIFFNESS CONSTRUCTION

AS025
AS025N

ISO 4210 - R/M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120/130mm(+/-7degree)
80/90/100/110/120mm(+/-17degree)
Angle: +/-7degree , +/-17degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 100g(AS025 90mm)
103g(AS025N 90mm)



AS025



AS025N



OPTIMAL STIFFNESS CONSTRUCTION

ASNR1

ISO 4210 - R/M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120/130mm
Angle: +/-7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 120g(90mm)



AS351
ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120mm
Angle: +/-7degree
Diameter: 35.0mm
Steerer: 28.6mm
Height: 40mm
Weight: 159g(90mm)



ASM02
ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 70/80/90/100/110/120mm
Angle: -7degree
Diameter: 35.0mm
Steerer: 28.6mm
Height: 40mm
Weight: 139g(90mm)



ASM04
ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 35/45/55mm
Angle: 0degree
Diameter: 35.0mm
Steerer: 28.6mm
Height: 40mm
Weight: 124g(45mm)





ASM01
ASM01N
ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120/130mm(7 degree)
50/60/70/80/90/100/110/120/130mm(-7 degree)
Angle: +/-7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 143g(ASM01 80mm)
148g(ASM01N 90mm)



ASM01



ASM01N

ASM03
ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 35/45/55/65mm
Angle: 0degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 125g(45mm)



ASM05
ISO 4210 - M approved
EN 17404

Die cast
Ext.: 35/45/55mm
Angle: 0degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 145g(45mm)





AS038
ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext: 90/110mm
Angle: 30degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 45mm
Weight: 372g(90mm)



AS037
ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext: 40/50/60mm
Angle: 7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 44mm
Weight: 234g(50mm)





AS034
ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 70/80/90/100/110/120mm
Angle: -7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 30mm
Weight: 184g(90mm)



-7 degree



+7 degree

AS031
ISO 4210 - R/M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120mm
Angle: +/-7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 34mm(+7degree)
35mm(-7degree)
Weight: 195g(90mm)



AS030
AS030H
ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 70/80/90/100/110mm
Angle: 25degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 50mm
Weight: 174g(AS030 90mm)
171g(AS030H 90mm)





AS030 AS030H



AS027
AS027N

ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120/130mm
Angle: +/-7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 131g(AS027 90mm)
126g(AS027N 90mm)



AS027 AS027N



AS018

ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 90/100/110/120/130mm
Angle: 7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 41mm
Weight: 132g(90mm)



AS007N

ISO 4210 - R/M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120/130mm(7degree x25.4/26.0mm)
60/70/80/90/100/110/120/130mm(7/17degree x31.8mm)
60/70/80/90/100/110mm(12degree x31.8mm)
Angle: 7/12/17degree
Diameter: 25.4/26.0/31.8mm
Steerer: 25.4/28.6mm
Height: 40mm
Weight: 134g(90mm x 7degree)



12 degree



17 degree



AS036

ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 70/80/90/100/110/120mm
Angle: +/-8degree, +/-16degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 44mm
Weight: 140g(90mm)
This stem includes one top cap and one bushings.
Provide Multi-positions for professional riding.

Eccentric±8 / ±16





AS7AD

ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 70/80/90/100/110/120mm
Angle: +/-8degree, +/-12degree, +/-16degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 44mm
Weight: 142g(90mm)
This stem includes one top cap and two bushings.
Provide Multi-positions for professional riding.

Regular±12 Eccentric±8 / ±16



RIGID





B4 Golden B11 Blue B18 Red

ASUP01

ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Steerer: 28.6mm
Height: 120mm
Stem adjuster: 5mm thick(4 spacer)
10mm thick(1 spacer)
Weight: 210g



PARTS1

Spacer:28.8mm x35mm
Spacer height: 5/10/20mm



GS02

ISO 4210 - M approved
EN 17404

CNC machined, 6061-T6 aluminum
Ext.: 40mm
Angle: 15degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 38mm
Weight: 202g

AS033
ISO 4210 - M approved
EN 17404
2D forged, 6061-T6 aluminum
Ext.: 35/45mm
Angle: 0degree
Diameter: 35.0mm
Steerer: 28.6mm
Height: 42mm
Weight: 190g(45mm)



AS032
ISO 4210 - M approved
EN 17404
2D forged, 6061-T6 aluminum
Ext.: 35/45mm
Angle: 0degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 176g(45mm)





AS021
ISO 4210 - M approved
EN 17404
2D forged, 6061-T6 aluminum
Ext.: 70/90/110mm
Angle: 35degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 41mm
Weight: 161g(90mm)





AS020
ISO 4210 - M approved
EN 17404
2D forged, 6061-T6 aluminum
Ext.: 50mm
Angle: 10degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 51mm
Weight: 226g



AS013
ISO 4210 - M approved
EN 17404
2D forged, 6061-T6 aluminum
Ext.: 60mm
Angle: 25degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 45mm
Weight: 193g







AS009
ISO 4210 - M approved
EN 17404
Forged, 6061-T6 aluminum
Ext.: 70/80/90/100/110/120/130mm(17degree)
60/75/90/110/120/135mm(35degree)
Angle: 17degree(3D forged)/35degree(2D forged)
Diameter: 25.4
Steerer: 25.4/28.6mm
Height: 41mm
Weight: 149g (90mm x 17degree)



17 degree

AS032T
ISO 4210 - M approved
EN 17404
2D forged, 6061-T6 aluminum
Face plate with light adapter
Ext.: 35/45mm
Angle: 0degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 206g(45mm)





ASDC1
ASDC1N

ISO 4210 - M approved
EN 17404

Die cast
Ext.: 60/75/90/105/120mm
Angle: 7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 42mm
Weight: 179g(ASDC1 75mm)
178g(ASDC1N 75mm)



ASDC1 ASDC1N



AS601
AS601N

ISO 4210 - M approved
EN 17404

Die cast
Ext.: 70/90/105/120mm(AS601 7degree x25.4mm)
60/75/90/105/120mm(AS601 15degree x25.4mm)
60/75/90/105/120mm(AS601/AS601N 7degree x31.8mm)
Angle: 7degree(AS601/AS601N)/15degree(AS601)
Diameter: 25.4mm(AS601)/31.8mm(AS601/AS601N)
Steerer: 28.6mm
Height: 40mm(25.4mm)/44mm(31.8mm)
Weight: 213g(AS601 90mm x 7degree)
194g(AS601N 90mm x 7degree)



AS601 AS601N





AS6030

ISO 4210 - C approved

Die cast
Ext.: 90/105/120mm(+/-15degree)
90/110mm(30degree)
Angle: +/-15degree, 30degree
Diameter: 25.4mm
Steerer: 25.4/28.6mm
Height: 41mm
Weight: 188g(90mmx30degree)



15 degree 30 degree



AS6028

ISO 4210 - M approved
EN 17404

Die cast
Ext.: 60/75/90/105/120/135mm
Angle: 15degree
Diameter: 25.4mm
Steerer: 28.6mm
Height: 41mm
Weight: 196g(90mm)



AL231
ISO 4210 - C approved

Die cast
Ext.: 80/100mm
Angle: 30degree
Diameter: 25.4mm
Steerer: 22.2/25.4mm
Length: 150/180mm
Weight: 340g(80mm x 180mm)



AL222
ISO 4210 - C approved

Die cast
Ext.: 60/80/100/120mm
Angle: 25degree
Diameter: 25.4mm
Steerer: 22.2mm
Length: 150/180/210mm(60mm)
135/180mm(80mm)
145/180mm(100mm)
135mm(120mm)
Weight: 363g(60mm x 180mm)



AL219
ISO 4210 - C approved

Die cast
Ext.: 65mm
Angle: 48degree
Diameter: 25.4mm
Steerer: 22.2mm
Length: 140/180/220mm
Weight: 336g(180mm)



KL
ISO 4210 - C approved

Die cast
Ext.: 60/80/100/120mm
Angle: -18degree
Diameter: 25.4/26.0mm
Steerer: 22.2mm
Length: 150/180mm
180mm is not available in ext. 100mm
Weight: 359g(25.4mmx100mm)





AS4006
ISO 4210 - M approved
EN 17404

Internal Cable Routing
3D forged angle adjustable stem
Ext.: 80mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 80mm+20mm
Weight: 448g




AS4005
ISO 4210 - C approved
EN 15194 (E-CITY)

3D forged angle adjustable stem
Ext.: 65/80mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 50mm
Weight: 324g(80mm)



AS4003
ISO 4210 - M approved
EN 17404

Internal Cable Routing
3D forged angle adjustable stem
Ext.: 110mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 42mm
Weight: 318g



AS4001
ISO 4210 - C approved

3D forged angle adjustable stem
Ext.: 95/110mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 25.4(shim)/28.6mm
Height: 40mm
Weight: 270g(95mm)



ADJUSTABLE

AS4002
ISO 4210 - C approved
EN 15194 (E-CITY)



2D forged angle adjustable stem
Ext.: 90/100/110mm
Angle: 10/30/50degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 39mm
Weight: 343g(90mm)

AS832
ISO 4210 - C approved



2D forged angle adjustable stem
Ext.: 90/110mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 41mm
Weight: 376g(90mm)

AS831
ISO 4210 - C approved
EN 15194 (E-CITY)



2D forged angle adjustable stem
Ext.: 90/110mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 37mm
Weight: 393g(90mm)



AS820
ISO 4210 - M approved
EN 17404

2D forged angle adjustable stem
Ext.: 90/110/130mm(25.4mm)
95/110/125mm(31.8mm)
Angle: 0~60degree
Diameter: 25.4/31.8mm
Steerer: 25.4(shim)/28.6mm
Height: 35mm
Weight: 265g(28.6mm x 95mm)



AL820
ISO 4210 - C approved
EN 15194 (E-CITY)

2D forged angle adjustable stem with quill
Ext.: 80/100/120mm(25.4mm)
85/100/115mm(31.8mm)
Angle: 0~60degree
Diameter: 25.4/31.8mm
Steerer: 22.2/25.4mm
Length: 150/180mm
Weight: 451g(25.4mm x 85mm)



AS7301
ISO 4210 - C approved

Die cast angle adjustable stem
Ext.: 90/110mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 338g(110mm)



AL7301
ISO 4210 - C approved

Die Cast angle adjustable stem with quill
Ext.: 75/95mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 25.4mm
Length: 180/220mm
Weight: 480g(95mm x 180mm)



AS7300
ISO 4210 - C approved

Die cast angle adjustable stem
Ext.: 90/110mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 318g(90mm)



AS828
ISO 4210 - C approved
Die cast angle adjustable stem
Ext.: 95/115mm
Angle: 0~60degree
Diameter: 25.4mm
Steerer: 28.6mm
Height: 35mm
Weight: 269g(95mm)



AL828
ISO 4210 - C approved
Die cast angle adjustable stem with quill
Ext.: 90/110mm
Angle: 0~60degree
Diameter: 25.4mm
Steerer: 22.2/25.4mm
Length: 150/180mm
Weight: 458g(25.4mm x 90mm)



AS822
ISO 4210 - C approved
Die cast angle adjustable stem
Ext.: 90/110/130mm
Angle: 0~60degree
Diameter: 25.4mm
Steerer: 25.4(shim)/28.6mm
Height: 40mm
Weight: 305g(90mm)



AL822
ISO 4210 - C approved
Die Cast angle adjustable stem with quill
Ext.: 80/100/120mm
Angle: 0~60degree
Diameter: 25.4mm
Steerer: 22.2/25.4mm
Length: 150/180mm
Weight: 486g(25.4mm x 80mm)



AS809
ISO 4210 - C approved
Die cast angle adjustable stem
Ext.: 110/130mm
Angle: -10~50degree
Diameter: 25.4mm
Steerer: 25.4(shim)/28.6mm
Height: 40mm
Weight: 360g(25.4mm x 28.6mm x 110mm)



AL809
ISO 4210 - C approved
Die cast angle adjustable stem with quill
Ext.: 90/110mm
Angle: 0~60degree
Diameter: 25.4mm
Steerer: 22.2/25.4mm
Length: 150/180mm
Weight: 518g(25.4mm x 90mm)

QUILL STEM



ASF102L
ASF102R
ISO 4210 - C approved
Folding stem, 6061-T6 aluminum
Ext.: 300/350/400mm
Length: 45mm
Diameter: 25.4mm
Steerer: 28.6mm
Weight: 542g(350mm)



ALF102L
ALF102R
ISO 4210 - C approved
Folding stem, 6061-T6 aluminum
Ext.: 300/350/400mm
Length: 100mm
Diameter: 25.4mm
Steerer: 22.2/25.4mm
Weight: 615g(350mm)



ALF103L
ALF103R
ISO 4210 - C approved
Folding stem, 6061-T6 aluminum
Ext.: 300/350/400mm
Length: 100mm
Steerer: 25.4mm
Weight: 504g(350mm)










QTSP03
ISO 4210 - R/M approved
EN 17404

Alloy clamps with carbon shaft(3K/UD)
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 204g(31.6mmx350mm)



QTSP01
ISO 4210 - R/M approved
EN 17404

Carbon fiber(3K/UD)
Diameter: 27.2/30.9/31.6mm
Length: 250/300/350/400mm(27.2mm)
300/350/400mm(30.9/31.6mm)
Offset: 0mm
Weight: 175g(31.6mmx350mm)

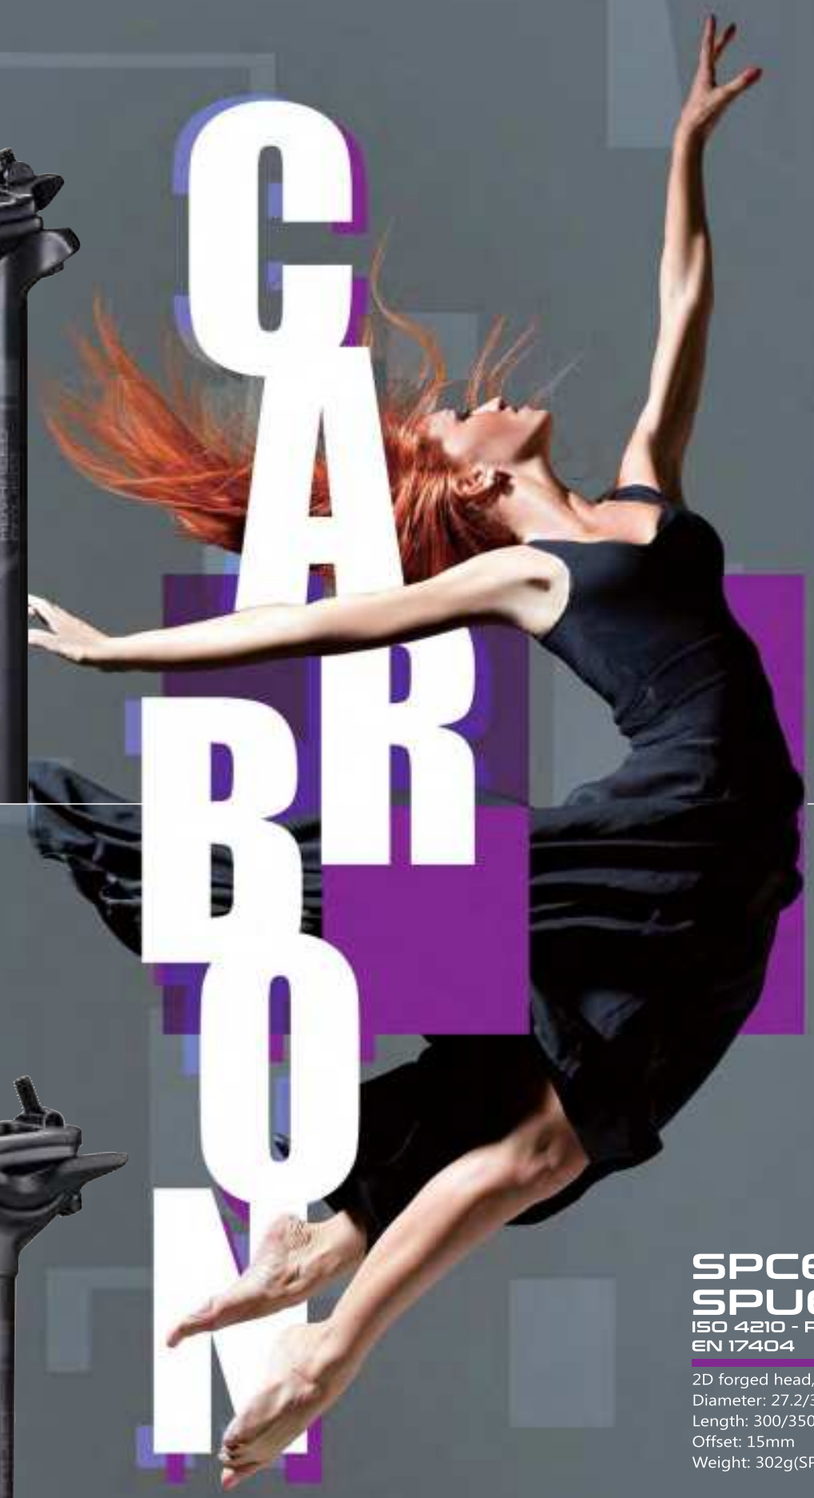



SPU02
ISO 4210 - R/M approved
EN 17404

2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 284g(31.6mmx350mm)

SPU01
ISO 4210 - R/M approved
EN 17404

2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 280g(31.6mmx350mm)



SPC620(CH)
SPU620(TW)
ISO 4210 - R/M approved
EN 17404

2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 24mm
Weight: 230g(SPC 620 27.2mm x 300mm)



SPC619(CH)
SPU619(TW)
ISO 4210 - R/M approved
EN 17404

2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 273g(SPC619 27.2mm x 350mm)
266g(SPU619 27.2mm x 350mm)



SPC612N(CH)
SPU612N(TW)
ISO 4210 - R/M approved
EN 17404

2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 15mm
Weight: 302g(SPC612N 31.6mm x 350mm)



SEATPOSTS



SP729
ISO 4210 - R/M approved
EN 17404
3D forged one-piece, 7050-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 277g(31.6mmx350mm)



SP713N
ISO 4210 - R/M approved
EN 17404
3D forged one-piece, 2014-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 15mm
Weight: 294g(31.6mm x 350mm)



SPF201S
ISO 4210 - R/M approved
EN 17404
2D forged head, 2014-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 260g(31.6mmx350mm)

SP613N
ISO 4210 - R/M approved
EN 17404
2D forged head, 2014-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350mm
Offset: 15mm
Weight: 300g(30.9mm x 350mm)



SP629
ISO 4210 - R/M approved
EN 17404
2D forged head, 2014-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350mm
Offset: 10mm
Weight: 287g(31.6mmx350mm)





SP376
ISO 4210 - R/M approved
EN 17404
3D forged one-piece, 2014-T6 oval shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 25mm
Weight: 307g(31.6mmx350mm)



SP358
ISO 4210 - R/M approved
EN 17404
3D forged one-piece, 2014-T6 oval shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 271g(31.6mmx350mm)



SP369
ISO 4210 - R/M approved
EN 17404
2D forged head, 2014-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350mm
Offset: 0mm
Weight: 272g(31.6mmx350mm)



SP267
ISO 4210 - R/M approved
EN 17404
2D forged head, 2014-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350mm
Offset: 17mm
Weight: 288g(31.6mm x 350mm)

3D FORGED RIGID



SP3D2
ISO 4210 - R/M approved
EN 17404
3D forged one-piece, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 329g(31.6mmx350mm)

SP3D1
ISO 4210 - R/M approved
EN 17404
3D forged one-piece, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 17mm
Weight: 349g(31.6mmx350mm)



SP719
ISO 4210 - R/M approved
EN 17404
3D forged one-piece, 6061-T6 shaft
Diameter: 27.2/30.9/31.6/34.9mm
Length: 300/350/400mm(27.2/30.9/31.6mm)
350/400mm(34.9mm)
Offset: 10mm
Weight: 286g(31.6mmx350mm)



SP712N
ISO 4210 - R/M approved
EN 17404
3D forged one-piece, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 15mm
Weight: 304g(31.6mm x 350mm)

SP700
ISO 4210 - R/M approved
EN 17404
3D forged one-piece, 6061-T6 oval shaft
Diameter: 26.6~27.2/29.8~31.8mm
Length: 300/350/400mm
Offset: 29mm
Weight: 294g(31.6mmx350mm)



SP375
ISO 4210 - R/M approved
EN 17404
3D forged one-piece, 6061-T6 oval shaft
Diameter: 26.6~27.2/29.8~31.8mm
Length: 300/350/400mm
Offset: 25mm
Weight: 332g(31.6mmx350mm)

SP342
ISO 4210 - R/M approved
EN 17404
3D forged one-piece, 6061-T6 oval shaft
Diameter: 25.4~27.2/28.6~31.6mm
Length: 300/350/400mm
Offset: 16mm
Weight: 312g(31.6mm x 350mm)



NEW

SPF105
ISO 4210 - R/M approved
EN 17404
2D forged head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 342g(27.2mmx350mm)
10mm-I.C.R.-hole in the head

NEW

SPF104
ISO 4210 - R/M approved
EN 17404
2D forged head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 342g(27.2mmx350mm)
11mm-I.C.R.-hole in the head



SPF103
ISO 4210 - R/M approved
EN 17404
2D forged head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm(27.2/30.9mm)
300/350/400/450mm(31.6mm)
Offset: 0mm
Weight: 314g(31.6mmx350mm)



SPF102
ISO 4210 - R/M approved
EN 17404
2D forged head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6/34.9mm
Length: 300/350/400mm(27.2/30.9mm)
300/350/400/450mm(31.6/34.9mm)
Offset: 7mm
Weight: 340g(31.6mm x 350mm)



SPF101(Hex Screw)
ISO 4210 - R/M approved
EN 17404
2D forged head, 6061-T6 shaft
Diameter: 30.9/31.6/34.9mm
Length: 350/400mm(30.9mm)
350/400/450mm(31.6/34.9mm)
Offset: 25mm
Weight: 465g(34.9mmx450mm)
424g(31.6mmx400mm)

UNO®



www.kalloyuno.com

2D FORGED RIGID

SP620
ISO 4210 - R/M approved
EN 17404
2D forged head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 24mm
Weight: 277g(31.6mmx300mm)



SP619
ISO 4210 - R/M approved
EN 17404
2D forged head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 312g(31.6mmx350mm)



SP612N
ISO 4210 - R/M approved
EN 17404
2D forged head, 6061-T6 shaft
Diameter: 25.2~27.2/28.6~31.8mm
Length: 300/350/400mm
Offset: 15mm
Weight: 326g(31.6mm x 350mm)



SP368
ISO 4210 - R/M approved
EN 17404
2D forged head, 6061-T6 shaft
Diameter: 25.4~27.2/28.6~31.8mm
Length: 300/350/400mm
Offset: 0mm
Weight: 310g(31.6mmx350mm)



SP341
ISO 4210 - R/M approved
EN 17404
2D forged head, 6061-T6 shaft
Diameter: 25.0~27.2/27.4~31.8mm
Length: 300/350/400mm
Offset: 14mm
Weight: 335g(31.6mm x 350mm)



SP265
ISO 4210 - R/M approved
EN 17404
2D forged head, 6061-T6 shaft
Diameter: 25.0~27.2/27.4~31.8mm
Length: 300/350/400mm
Offset: 17mm
Weight: 320g(31.6mm x 350mm)



SP248D
ISO 4210 - R/M approved
EN 17404
Forged one-piece, 6061-T6 shaft
Diameter: 25.0~27.2/27.4~31.8mm
Length: 300/350/400mm
Offset: 26mm
Weight: 344g(31.6mmx350mm)



SEATPOSTS

SPDC2
ISO 4210 - R/M approved
EN 17404
Die cast head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm(27.2/31.6mm)
300/350/400/450mm(30.9mm)
Offset: 0mm
Weight: 331g(27.2mmx350mm)



SPDC1
ISO 4210 - R/M approved
EN 17404
Die cast head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm(27.2mm)
300/350/400/450mm(30.9/31.6mm)
Offset: 5mm
Weight: 332g(31.6mmx350mm)

SP602
ISO 4210 - R/M approved
EN 17404
Die cast head, 6061-T6 shaft
Diameter: 25.0~27.2/27.4~31.8mm
Length: 300/350/400mm
Offset: 24mm
Weight: 335g(31.6mmx350mm)



SP359
ISO 4210 - R/M approved
EN 17404
Die cast head, 6061-T6 shaft
Diameter: 25.0~27.2/27.4~31.8mm
Length: 300/350/400mm
Offset: 12mm
Weight: 349g(31.6mmx350mm)



SP353
ISO 4210 - R/M approved
EN 17404
Extruded head, 6061-T6 shaft
Diameter: 25.0~27.2/27.4~31.8mm
Length: 300/350/400mm
Offset: 16mm
Weight: 350g(31.6mm x 350mm)



SP200M
ISO 4210 - R/M approved
EN 17404
Diameter: 25.4~27.2/28.6~31.6mm
Length: 300/350/400mm
Weight: 198g(27.2mmx350mm)



SP383
ISO 4210 - C approved
MDU suspension seatpost
2D forged head, 6061-T6
Travel: 45mm
Diameter(Normal): 26.8/27.0/27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 10mm
Weight: 512g(31.6mmx350mm)



SP382
ISO 4210 - C approved
MDU suspension seatpost
2D forged head, 6061-T6
Travel: 40mm
Diameter(Normal): 26.8/27.0/27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 20mm
Weight: 365g(27.2mmx300mm)



SP380
ISO 4210 - C approved
MDU suspension seatpost
2D forged head, 6061-T6
Travel: 45mm
Diameter(Normal): 26.8/27.0/27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 13mm
Weight: 493g(31.6mmx350mm)



SP379
ISO 4210 - C approved
MDU suspension seatpost
2D forged head, 6061-T6
Travel: 45mm
Diameter(Normal): 26.8/27.0/27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 0mm
Weight: 500g(31.6mmx350mm)



SUSPENSION

UNO
www.kalloyuno.com

SP500
ISO 4210 - C approved
Spring suspension seatpost
2D forged head, 6061-T6
Travel: 40mm
Diameter(Normal): 26.8~27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 13mm
Weight: 511g(27.2mmx350mm)

SP505
ISO 4210 - C approved
Spring suspension seatpost
Extrusion, 6061-T6
Diameter(Normal): 26.8~27.0mm
Diameter(Over): 27.2mm
Length: 300/350mm
Weight: 384g(27.2mmx350mm)

SP503
ISO 4210 - C approved
Spring suspension seatpost
2D forged head, 6061-T6
Travel: 47mm
Diameter(Normal): 26.8/27.0/27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 15mm
Weight: 585g(31.6mmx350mm)



SP509
ISO 4210 - M approved
EN 17404
Spring suspension seatpost
2D forged head, 6061-T6
Travel: 45mm
Diameter(Normal): 26.8/27.0/27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 10mm
Weight: 510g(27.2mmx350mm)



SP504
ISO 4210 - C approved
Spring suspension seatpost
2D forged head, 6061-T6
Travel: 32mm
Diameter(Normal): 25.4~27.0/27.2mm
Diameter(Over): Shim for oversize
Length: 300/350mm
Offset: 13mm
Weight: 472g(27.2mmx350mm)



HANDLEBAR

FLARED/DROP
RISE /FLAT
CITY & OTHERS

UNO
www.kalloyuno.com



NEW

HBL106

ISO 4210 - R approved




6061 D.B. racing bar
Barbore: 31.8mm
Drop: 100mm
Reach: 70mm
Width: 380/400/420/440/460mm
Ramp angle: 10degree
Flare angle: 5degree
Weight: 312g(440mm)



HBL104

ISO 4210 - R approved



6061 T.B. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 72mm
Width: 360/380/400/420/440mm
Ramp angle: 23degree
Flare angle: 4degree
Weight: 312g(440mm)



HBL103
ISO 4210 - R approved
6061 D.B. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 78mm
Width: 400/420/440/460mm
Ramp angle: 20degree
Flare angle: 6/12degree
Weight: 315g(420mm)



HBL002
ISO 4210 - R approved
6061 P.G. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 78mm
Width: 400/420/440/460mm
Ramp angle: 20degree
Flare angle: 6/12degree
Weight: 430g(420mm)




HBL102
ISO 4210 - R approved
6061 D.B. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 70mm
Width: 320/340/360/380/400/420/
440/460mm
Ramp angle: 10degree
Flare angle: 6/12degree
Weight: 315g(420mm)



HBL001
ISO 4210 - R approved
6061 P.G. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 70mm
Width: 400/420/440/460mm
Ramp angle: 10degree
Flare angle: 6/12degree
Weight: 370g(420mm)



HBL101
ISO 4210 - R approved
6061 D.B. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 70mm
Width: 380/400/420/440/460mm
Ramp angle: 10degree
Flare angle: 6/12degree
Weight: 300g(420mm)




Aero





HBFL12
ISO 4210 - R approved
6061 D.B. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 70mm
Width: 380/400/420/440/460mm
Ramp angle: 10degree
Flare angle: 20degree
Weight: 285g(420mm)





HBUB22
ISO 4210 - R approved
6061 D.B. racing bar
Barbore: 31.8mm
Drop: 100mm
Reach: 66mm
Width: 560mm
Ramp angle: 40degree
Flare angle: 11degree
Weight: 280g







HBTM23 Drop/Reach 142/82

HBTM21
ISO 4210 - R approved
6061 P.G. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 72mm
Width: 380/400/420/440mm
Weight: 405g(420mm)

HBTM22
ISO 4210 - R approved
6061 P.G. racing bar
Barbore: 31.8mm
Drop: 142mm
Reach: 82mm
Width: 400/420/440mm
Weight: 400g(420mm)

HBTM23
ISO 4210 - R approved
6061 D.B. racing bar
Barbore: 31.8mm
Drop: 142mm
Reach: 82mm
Width: 400/420/440mm
Weight: 300g(420mm)



HBTM13 Drop/Reach 131/84

HBTM11
ISO 4210 - R approved
6061 P.G. racing bar
Barbore: 31.8mm
Drop: 131mm
Reach: 75mm
Width: 360/380/400/420/440mm
Weight: 425g(400mm)

HBTM12
ISO 4210 - R approved
6061 P.G. racing bar
Barbore: 31.8mm
Drop: 131mm
Reach: 84mm
Width: 380/400/420/440/460/480mm
Weight: 420g(400mm)

HBTM13
ISO 4210 - R approved
6061 D.B. racing bar
Barbore: 31.8mm
Drop: 131mm
Reach: 84mm
Width: 400/420/440mm
Weight: 320g(400mm)





Drop/Reach 144/77

HBTE11
ISO 4210 - R approved
6061 P.G. racing bar
Barbore: 26.0mm
Drop: 150mm
Reach: 80mm
Width: 380/400/420/440/460mm
Weight: 425g(420mm)

Barbore: 31.8mm
Drop: 144mm
Reach: 77mm
Width: 400/420/440mm
Weight: 425g(420mm)

HBTE12
ISO 4210 - R approved
6061 D.B. racing bar
Barbore: 31.8mm
Drop: 144mm
Reach: 77mm
Width: 400/420/440mm
Weight: 320g(420mm)



NEW

HBD102
ISO 4210 - R approved
6061 D.B. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 70mm
Width: 380/400/420/440mm
Weight: 306g(420mm)



HBD101
ISO 4210 - R approved
6061 D.B. racing bar
Barbore: 31.8mm
Width: 400/420/440/460mm
Weight: 316g(420mm)



Drop/Reach 120/70

HB-CR21
ISO 4210-R approved

6061 P.G. racing bar
Barbore: 26.0/31.8mm
Drop: 120mm
Reach: 75mm
Width: 360/380/400/420/440mm(26.0mm)
360/380/400/420/440/460mm(31.8mm)
Weight: 355g(380mm)

HB-CR22
ISO 4210-R approved

6061 D.B. racing bar
Barbore: 31.8mm
Drop: 120mm
Reach: 70mm
Width: 320/340/360/380/400/420/440/460mm
Weight: 285g(420mm)





Drop/Reach 140/90

HBCR11
ISO 4210 - R approved

6061 P.G. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 70mm
Width: 380/400/420/440mm
Weight: 435g(420mm)

Barbore: 31.8mm
Drop: 140mm
Reach: 90mm
Width: 380/400/420/440mm
Weight: 435g(400mm)

HB-CR12
ISO 4210-R approved

6061 D.B. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 70mm
Width: 360/380/400/420
440/460/480mm
Weight: 300g(420mm)

Barbore: 31.8mm
Drop: 140mm
Reach: 90mm
Width: 380/400/420/440mm
Weight: 305g(400mm)





Drop/Reach 183/108

HBCM31
ISO 4210 - R approved

6061 P.G.
Barbore: 26.0/31.8mm
Drop: 170mm
Reach: 90mm
Width: 360/380/400/420/440mm(26.0mm)
380/400/420/440mm(31.8mm)
Weight: 407g(380mm)

Barbore: 26.0/31.8mm
Drop: 183mm
Reach: 108mm
Width: 360/380/400/420/440mm(26.0mm)
380/400/420/440mm(31.8mm)
Weight: 440g(420mm))





HBCM21
ISO 4210 - C approved

6061 P.G. racing bar
Barbore: 26.0mm
Drop: 135mm
Reach: 80mm
Width: 400/420/440mm
Weight: 385g(420mm)





HBCM11
ISO 4210 - C approved

6061 P.G. racing bar
Barbore: 26.0mm
Drop: 150mm
Reach: 130mm
Width: 400/420/440mm
Weight: 440g(420mm)



HBAR15

ISO 4210 - R approved

6061 D.B. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 70mm
Width: 400/420/440mm
Weight: 285g(400mm)



Aero

UNO

M

N

RISE BAR
FLAT TOP
FLAT BAR

www.kalloyuno.com



HB354
ISO 4210 - C approved
EN 15194 (E-CITY)
6061 T.B. rise bar
Barbore: 35.0mm
Rise: 5mm
Backsweep: 30degree
Width: 680/700/720/740mm
Weight: 332g(740mm)



HB353
ISO 4210 - M approved
EN 17404
6061 T.B. rise bar
Barbore: 35.0mm
Rise: 15/25/35/45mm
Backsweep: 5/9degree
Width: 580/680/700/720/740/760/780/800mm(15/25/35mm)
580/680/700/720/740/760mm(45mm)
Weight: 315g(780mm)



QTSRB02
ISO 4210 - M approved
EN 17404
Carbon rise bar
Barbore: 31.8mm
Rise: 18mm
Backsweep: 8degree
Width: 600/620/640/660/680/700/720/740/760/780mm
Weight: 182g(780mm)



HBUB12
ISO 4210 - M approved
EN 17404
6061 D.B. rise bar
Barbore: 31.8mm
Rise: 17mm
Backsweep: 15/30degree
Width: 660/680mm
Weight: 295g(660mm)

HBR102
ISO 4210 - M approved
EN 17404
6061 T.B. rise bar
Barbore: 31.8mm
Rise: 50/60mm
Backsweep: 5/9degree
Width: 660/740/760/780/800mm
Weight: 378g(800mm)



HBR100
ISO 4210 - M approved
EN 17404
6061 D.B. rise bar
Barbore: 31.8mm
Rise: 15mm
Backsweep: 5/9degree
Width: 580/600/620/640/660/680mm
Weight: 278g(640mm)

HBR100L
ISO 4210 - M approved
EN 17404
6061 T.B. rise bar
Barbore: 31.8mm
Rise: 15mm
Backsweep: 5/9degree
Width: 700/720mm
Weight: 300g(720mm)



HBR001
ISO 4210 - M approved
EN 17404
6061 P.G. rise bar
Barbore: 31.8mm
Rise: 15mm
Backsweep: 5/9degree
Width: 620/640/660/680mm
Weight: 358g(640mm)

HBR001L
ISO 4210 - M approved
EN 17404
6061 P.G. rise bar
Barbore: 31.8mm
Rise: 15mm
Backsweep: 5/9degree
Width: 700/720/740/760/780/800mm
Weight: 392g(700mm)

RISE BAR



HBRB22
ISO 4210 - M approved
EN 17404
6061 D.B. rise bar
Barbore: 31.8mm
Rise: 10mm
Backsweep: 5/9/12degree
Width: 560/580/600/620/640/660/680/700/720/740/760mm
Weight: 295g(720mm)



HBRB12
ISO 4210 - M approved
EN 17404
6061 D.B. rise bar
Barbore: 25.4/31.8mm
Rise: 25mm(25.4mm)
15/25mm(31.8mm)
Backsweep: 8degree(25.4mmx25mm)
5/9/15/25degree(31.8mmx15mm)
5/9/15degree(31.8mm x25mm)
Width: 500/520/540/560/600/620/640/660/680mm(25.4mm)
500/520/540/560/580/600/620/640/660/670/680mm(31.8mm)
Weight: 252g(25.4mmx660mm)

HBRB12L
ISO 4210 - M approved
EN 17404
6061 D.B. rise bar
Barbore: 31.8mm
Rise: 15/25mm
Backsweep: 5/9/15degree
Width: 700/720/740mm
Weight: 295g(720mm)

HBRB12W
ISO 4210 - M approved
EN 17404
6061 T.B. rise bar
Barbore: 31.8mm
Rise: 15/25/35mm
Backsweep: 5/9degree
Width: 760/780/800mm(15/25mm)
620/640/700/720/740/760/780/800mm(35mm)
Weight: 330g(780mm)




HBRB11
ISO 4210 - M approved
EN 17404
6061 P.G. rise bar
Barbore: 25.4/31.8mm
Rise: 20/30mm(25.4mm)
10/15/25/35mm(31.8mm)
Backsweep: 6/9/12degree(25.4mm)
5/9/12degree(31.8mmx10/15mm)
5/9degree(31.8mmx25/35mm)
Width: 500/520/540/560/580/600/620/640/660/680mm(25.4mm)
560/580/600/620/640/660/680mm(31.8mm)
Weight: 375g(25.4mmx660mm)

HBRB11L
ISO 4210 - M approved
EN 17404
6061 P.G. rise bar
Barbore: 31.8mm
Rise: 10/15/25/35mm
Backsweep: 5/9degree
Width: 700/720mm(10mm)
700/720/740mm(15mm)
700/720/740/760mm(25/35mm)
Weight: 390g(720mm)



HB352
ISO 4210 - M approved
EN 17404
6061 D.B. flat top
Barbore: 35.0mm
Backsweep: 5/9degree
Width: 620/640/660/680/700/720/740/760/780mm
Weight: 285g(720mm)

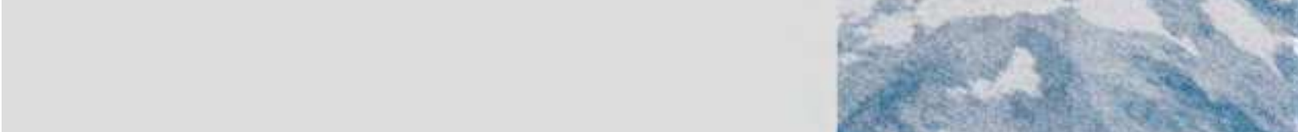

HBFB21
HBFB21L
HBFB21W
ISO 4210 - M approved
EN 17404
6061 D.B. flat top
Barbore: 31.8mm
Backsweep: 5/9degree
Width: 540/560/580/600mm(HBFB21)
620/640/660/680/700/720mm(HBFB21L)
730/740/760mm(HBFB21W)
Weight: 240g(600mm)





HB351
ISO 4210 - M approved
EN 17404
6061 D.B. flat bar
Barbore: 35.0mm
Backsweep: 5/9degree
Width: 620/640/660/680/700/720/740/760mm
Weight: 285g(720mm)



HBFB12
ISO 4210 - M approved
EN 17404
6061 D.B. flat bar
Barbore: 25.4/31.8mm
Backsweep: 5/9degree(25.4mm)
5/9/12degree(31.8mm)
Width: 500/520/540/560/580/600/620mm(25.4mm)
540/560/580/600mm(31.8mm)
Weight: 205g(25.4mmx580mm)

HBFB12L
ISO 4210 - M approved
EN 17404
6061 D.B. flat bar
Barbore: 31.8
Backsweep: 5/9/12degree
Width: 620/640/660/680/700/720/740mm
Weight: 235g(620mm)



HBFB11
ISO 4210 - M approved
EN 17404
6061 P.G. flat bar
Barbore: 25.4/31.8mm
Backsweep: 5/9degree(25.4mm)
0/5/9degree(31.8mm)
Width: 500/520/540/560/580/600/620/640mm(25.4mm)
540/560/580/600mm(31.8mm)
Weight: 243g(25.4mmx580mm)

HBFB11L
ISO 4210 - M approved
EN 17404
6061 P.G. flat bar
Barbore: 31.8mm
Backsweep: 5/9degree
Width: 620/640/660/680/700/720mm
Weight: 375g(720mm)



NEW

HBL003

ISO 4210 - M approved

6061 P.G.
Barbore: 31.8mm
Drop: 115mm
Width: 400/420/440/460mm
Flare angle: 33degree
Sweep angle: 57degree
Weight: 396g(420mm)





HBC101
ISO 4210 - C approved

6061 D.B. city bar
Barbore: 31.8mm
Backsweep: 21degree
Width: 640/700mm
Weight: 352g(700mm)



HB411E
ISO 4210 - C approved

HB411OV
ISO 4210 - C approved / EN15194(E-CITY)

6061 P.G. city bar
Barbore: 25.4mm(HB411E)
31.8mm(HB411OV)
Rise: 28mm
Backsweep: 37degree
Width: 520/540/560/580/600/620/640mm(HB411E)
520/540/590/600/620/640/660/680mm(HB411OV)
Weight: 274g(HB411E 600mm)
290g(HB411OV 600mm)

city & others



HBTR4
ISO 4210 - C approved
EN 15194 (E-CITY)

6061 P.G. city bar
Barbore: 31.8mm
Backsweep: 11degree
Width: 620/640/660/680/700/720mm
Weight: 275g(640mm)



HBTR3
ISO 4210 - C approved

6061 P.G. city bar
Barbore: 25.4mm
Backsweep: 11degree
Width: 600/620/640/660/680mm
Weight: 265g(640mm)



HBTR2
ISO 4210 - C approved
EN 15194 (E-CITY)

6061 P.G. city bar
Barbore: 31.8mm
Backsweep: 25/35/45degree
Width: 600/620/640/660/680mm
Weight: 280g(640mm)



HBTR1
ISO 4210 - C approved

6061 P.G. city bar
Barbore: 25.4mm
Backsweep: 25degree
Width: 580/600/620/640/660/680mm
Weight: 290g(640mm)

AL030 (T2.2 / Centr:40mm)
ISO 4210 - C approved

AL030K (T3.0 / Centr:40mm)
ISO 4210 - C approved / EN15194(E-CITY)

AL030S (T2.0 / Centr:70mm)
ISO 4210 - C approved / EN15194(E-CITY)

6061 P.G. city bar
Barbore: 25.4mm(AL030/AL030K)
31.8mm(AL030S)
Backsweep: 34degree
Width: 560//570/580/600/610mm(AL030)
580/600/610/620/640/660/680mm(AL030K)
580/600/610/620/640mm(AL030S)
Weight: 280g(AL030 610mm)
388g(AL030K 640mm)
312g(AL030S 640mm)



AL042 (Centr:90mm)
ISO 4210 - C approved

AL042L (Centr:70mm)
ISO 4210 - C approved / EN15194(E-CITY)

6061 P.G. city bar
Barbore: 25.4mm(AL042)
31.8mm(AL042L)
Backsweep: 15degree
Width: 480/500/520/540/560/580/600mm(25.4mm)
600/620/640/660/680mm(31.8mm)
Weight: 240g(AL042 600mm)
282g(AL042L 640mm)



AL069 (Centr:40mm)
ISO 4210 - C approved

AL069V (Centr:40mm)
ISO 4210 - C approved / EN15194(E-CITY)

6061 P.G. city bar
Barbore: 25.4mm(AL069)
31.8mm(AL069V)
Width: 570/585mm(AL069)
530/570/585mm(AL069V)
Length: 110/142/148mm
Weight: 500g(AL069 585mm)
516g(AL069V 585mm)





AL078 (Centr:35mm)
ISO 4210 - C approved

AL078L (Centr:40mm)
ISO 4210 - C approved / EN15194(E-CITY)

6061 P.G. city bar
Barbore: 25.4mm(AL078)
31.8mm(AL078L)
Rise: 45mm
Backsweep: 24degree
Width: 490/520/570/580/600/618mm(25.4mm)
600/620/640mm(31.8mm)
Weight: 254g(AL078 600mm)
266g(AL078L 600mm)



AL080 (Centr:40mm)
ISO 4210 - C approved

AL080L (Centr:40mm)
ISO 4210 - C approved / EN15194(E-CITY)

AL080S (Centr:80mm)
ISO 4210 - C approved / EN15194(E-CITY)

6061 P.G. city bar
Barbore: 25.4mm(AL080)
31.8mm(AL080L/AL080S)
Rise: 55mm
Backsweep: 40degree
Width: 580/600/620mm(25.4mm)
580/600/620/640/660/680(31.8mm)
Weight: 294g(AL080 620mm)
306g(AL080L 620mm)
308g(AL080S 620mm)



AL081 (Centr:32mm)
ISO 4210 - C approved

6061 P.G. city bar
Barbore: 25.4mm
Rise: 50mm
Backsweep: 59degree
Width: 535/560/580/610mm
Weight: 312g(580mm)



AL092 (Centr:70mm)
ISO 4210 - C approved

6061 P.G. city bar
Barbore: 25.4mm
Rise: 70mm
Backsweep: 50degree
Width: 520/540/560/580/600/620mm
Weight: 302g(600mm)



www.kalloyuno.com

BARENDS CLAMPS

BARENDS



BE304
3D forged, 6061-T6
ergo endcap provides comfortable grip
and precisely control
Barbore: 22.2mm
Diameter of tube: 22mm
Length: 80mm
Weight: 87g



BE301
3D forged one piece, 6061-T6
Barbore: 22.2mm
Diameter of tube: Oval
Length: 80/90/110mm
Weight: 142g(80mm)



BE21S
Tig-welded, 6061-T6
Barbore: 22.2mm
Diameter of tube: 25.4mm
Length: 80mm
Weight: 103g



BE16
Tig-welded, 6061-T6
Barbore: 22.2mm
Diameter of tube: 22.2mm
Weight: 133g



BE302
3D forged two piece, 6061-T6
Barbore: 22.2mm
Length: 96/120/135mm
Weight: 189g(120mm)



BE307
3D forged one piece, 6061-T6
Barbore: 22.2mm
Diameter of tube: Oval
Length: 80/110mm
Weight: 131g(110mm)



BETG1
3D forged one piece, 6061-T6
Barbore: 22.2mm
Diameter of tube: 22.6mm
Length: 85/110mm
Weight: 122g(85mm)



BE08
Melt forged head, 6061-T6 tube
Barbore: 22.2mm
Diameter of tube: 22.2mm
Weight: 182g



BEFIS
3D forged one piece, 6061-T6
Barbore: 22.2mm
Diameter of tube: 22.6mm
Weight: 145g

UNO

QR COLLAR



XC81
Extruded clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 42g(34.9mm)



XC81N
Extruded clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 42g(34.9mm)
Rubber color: Navy Blue



XC80
Extruded clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 42g(34.9mm)



XC79
Extruded clamp with quick-release
Diameter: 38.1mm
Height: 15mm
Weight: 49g



XC78
2D forged clamp with quick-release
Diameter: 31.8/34.9mm
Height: 15mm
Weight: 44g(34.9mm)



XC72
2D forged clamp with quick-release
Diameter: 31.8/34.9mm
Height: 22.5mm
Weight: 46g(34.9mm)



XC68
Extruded clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 41g(34.9mm)



XC63
Extruded clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 55g(34.9mm)
Finished: two tone color for black





XC61
Extruded clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 56g(34.9mm)



XC60
2D forged clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 50g(34.9mm)



XTB-N
2D forged clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 53g(34.9mm)



XTB-C
Extruded clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 49g(34.9mm)

QUICK RELEASE LEVER



SQ-M32
Extruded quick release lever
Diameter: 6/8mm
Length: 45/50/55/60/65/70mm
Weight: 34g(L:50mm)



SQ60
Forged quick release lever
Diameter: 5mm
Length: 50/55/60/65/70mm
Weight: 29g(L:50mm)



BOLTED COLLAR



NEW



SC79
Extruded clamp
Diameter: 31.8/34.9mm
Height: 13mm



SC78
2D forged clamp
Diameter: 31.8/34.9mm
Height: 15mm
Weight: 28g(34.9mm)



SC213
2D forged clamp
Diameter: 31.8/34.9mm
Height: 26mm
Weight: 25g(34.9mm)



SC208
Extruded clamp
Diameter: 31.8/34.9mm
Height: 15mm
Weight: 17g(34.9mm)



SC206
2D forged clamp
Special for carbon fiber shaft
Diameter: 31.8/34.9mm
Height: 11mm
Weight: 23g(34.9mm)
Finished: two tone color for black



SC205
Extruded clamp
Diameter: 28.6/31.8/34.9mm
Height: 11mm
Weight: 27g(34.9mm)



SC200
Extruded clamp
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 32g(34.9mm)



SC100
Extruded clamp
Diameter: 28.6/31.8/34.9mm
Height: 11mm
Weight: 23g(34.9mm)







SC204
Extruded clamp
Diameter: 28.6/31.8/34.9mm
Height: 13mm
Weight: 30g(34.9mm)



SC203
Extruded clamp with Allen seat pin
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 36g(34.9mm)



SC201
Extruded clamp with CNC groove
Diameter: 28.6/31.8/34.9mm
Height: 13mm
Weight: 28g(34.9mm)



MTBFG
Extruded clamp
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 30g(34.9mm)



MTB-TK
2D forged clamp
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 34g(34.9mm)



MTB-FM
Extruded clamp & CNC
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 30g(34.9mm)



GC01
CNC extruded double clamp
Diameter: 27.2x31.8mm
31.6x34.9mm
Height: 38mm
Weight: 46g(31.6mmx34.9mm)



GC02
CNC extruded double clamp
Diameter: 27.2x30.6/31.8mm
30.9/31.6x34.9mm
31.8x35.1mm
Height: 31mm
Weight: 40g(31.6mmx34.9mm)



www.kalloyuno.com

INTERNAL CABLE ROUTING



NEW

ASIC4006

ISO 4210 - C approved

2D forged angle adjustable stem
Ext: 90mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 45mm

compatible with PRESTINE®



NEW

ASIC007N

ISO 4210 - R/M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext: 80/90/100/110mm
Angle: +/-7degree
Diameter: 31.8mm
Steerer: 25.4/28.6mm
Height: 40mm
Weight: 170g(100mm)



ASIC007N-1865

Headset 56mm (8.7mm / 7mm)

ASIC007N-1866

Headset 56mm (8.3mm / 8.3mm)



ASIC007N-F26

Headset 62mm



ASIC01

ISO 4210 - M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext: 90mm
Angle: 12degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 43mm
Weight: 268g



SR-68-10
SPACER 10mm (two pc)



SR-68-5
SPACER 5mm (two pc)




ASIC01-1865
Headset 56mm (8.7mm / 7mm)

ASIC01-1866
Headset 56mm (8.3mm / 8.3mm)



ASIC01-F26
Headset 62mm

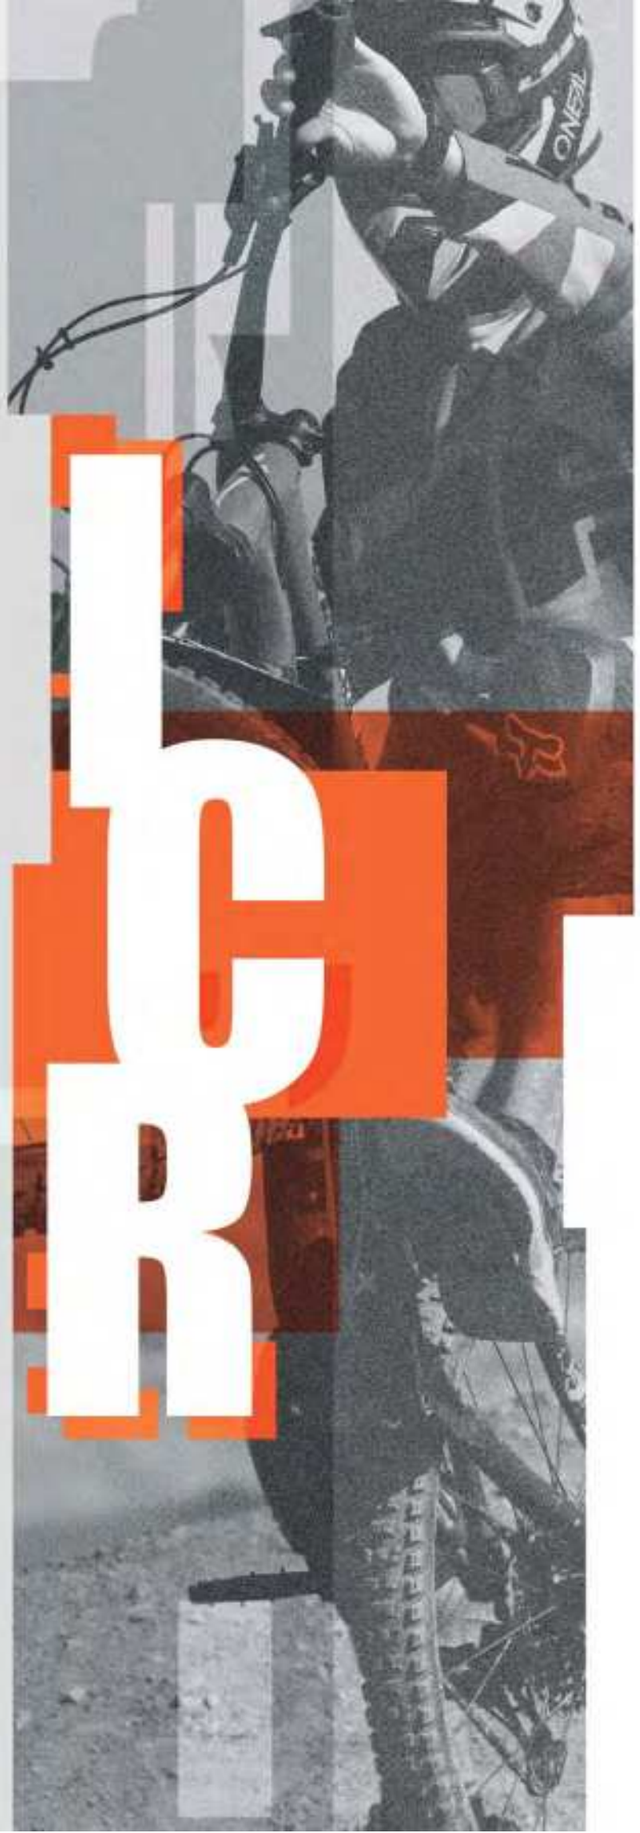

Headset

ASIC01-F26
ASIC007N-F26



ASIC01-1866
ASIC007N-1866



ASIC01-1865
ASIC007N-1865





NEW

AS042
ISO 8098 approved

2D forged, 6061-T6 aluminum
Ext: 40mm
Angle: 20degree
Diameter: 25.4mm
Steerer: 25.4mm
Height: 35mm
Weight: 118g



AS3300
ISO 4210 - M approved
EN 17404

Die cast
Ext.: 45mm
Angle: 15degree
Diameter: 25.4mm
Steerer: 28.6mm
Height: 40mm
Weight: 140g





NEW

HBL105
ISO 8098 approved

6061 D.B. racing bar
Barbore: 31.8mm
Drop: 100mm
Reach: 73mm
Width: 340/360/380/400/420mm
Ramp angle: 16degree
Flare angle: 10degree
Weight: 294g(420mm)







HBFB12S
ISO 8098 approved

6061 D.B. flat bar
Barbore: 25.4mm
Grip O.D.:19mm
Backsweep: 9degree
Width: 420mm
Weight: 144g



HBRB12S
ISO 8098 approved

6061 D.B. rise bar
Barbore: 25.4mm
Grip O.D.:19mm
Rise: 20mm
Backsweep: 9degree
Width: 460mm
Weight: 156g



HB029HDB
ISO 8098 approved

6061 D.B. rise bar
Barbore: 25.4mm
Grip O.D.:19mm
Rise: 50/70mm
Backsweep: 9degree
Width: 460mm
Weight: 166g



HB029DB
ISO 8098 approved

6061 D.B. rise bar
Barbore: 25.4mm
Rise: 40/50mm
Backsweep: 9degree
Width: 520/560/600mm
Weight: 279g(650mm)

AL029H
ISO 8098 approved

6061 P.G. rise bar
Barbore: 25.4mm
Grip O.D.:19mm
Rise: 50mm
Backsweep: 9degree
Width: 440/460mm



UBSOP04
ISO 4210 - R/M approved
EN 17404
Alloy clamps with carbon shaft
Diameter: 27.2/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 192g(31.6mmx350mm)

UBSOP03
ISO 4210 - R/M approved
EN 17404
Alloy clamps with carbon shaft
Diameter: 27.2/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 208g(31.6mmx350mm)



UBSOP02
ISO 4210 - R/M approved
EN 17404
carbon fiber
Diameter: 27.2/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 182g(31.6mmx350mm)



UBSOP01
ISO 4210 - R/M approved
EN 17404
carbon fiber
Diameter: 27.2/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 192g(31.6mmx350mm)



UBSSP02
ISO 4210 - R/M approved
EN 17404
2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 232g(31.6mmx350mm)

UBSSP01
ISO 4210 - R/M approved
EN 17404
2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 240g(31.6mmx350mm)

UBSD01
ISO 4210 - R approved
carbon racing bar
Barbore: 31.8mm
Drop: 110mm
Reach: 72mm
Flare angle: 6degree
Ramp angle: 6degree
Width: 400/420/440mm
Weight: 246g(420mm)





NEW

UBSD02
ISO 4210 - R approved
carbon racing bar
Barbore: 31.8mm
Drop: 110mm
Reach: 72mm
Flare angle: 6degree
Ramp angle: 6degree
Width: 400/420/440mm
Weight: 244g(440mm)
I.C.R. hole





UBSR01
ISO 4210 - M approved
EN 17404
carbon rise bar
Barbore: 31.8mm
Rise: 15mm
Backsweep: 9degree
Width: 540/700/720/740/760/780/800mm
Weight: 196g(780mm)



UBSF01
ISO 4210 - M approved
EN 17404
carbon flat bar
Barbore: 31.8mm
Backsweep: 9degree
Width: 700/720/740/760/780/800mm
Weight: 196g(780mm)

UBS SERIES

+ ASHD002
ISO 4210 - M+ approved
EN 17404
3D forged, 6061-T6 aluminum
Ext.: 35/45/55/65mm
Angle: 0degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 174g(45mm)



+ ASHD001
ISO 4210 - M+ approved
EN 17404
3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120mm
Angle: 7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 178g(80mm)



+ HD series offer higher performance, enhance the capabilities and strength with stern test standard. This beating the satisfaction of E-bike and cargo bike.
- Higher performance
- Enhance capabilities
- ISO 4210 M+



+ SPHD002
ISO 4210 - M+ approved
EN 17404
3D forged one-piece, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350mm
Offset: 0mm
Weight: 383g(31.6mmx350mm)

+ SPHD001
ISO 4210 - M+ approved
EN 17404
3D forged one-piece, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350mm
Offset: 15mm
Weight: 383g(31.6mmx350mm)

UNO

www.kalloyuno.com

HEAVY DUTY SERIES



+ HBHR101
ISO 4210 - M+ approved
EN 17404
6061 D.B. rise bar
Barbore: 31.8mm
Rise: 25mm
Backsweep: 5/9degree
Upsweep: 5degree
Width: 660/680/700/720/740/760/780mm
Weight: 360g(760mm)

+ HBHT101
ISO 4210 - M+ approved
EN 17404
6061 D.B. flat top
Barbore: 31.8mm
Backsweep: 5/9degree
Width: 680/700/720/740/760mm
Weight: 340g(740mm)

+ HBHF101
ISO 4210 - M+ approved
EN 17404
6061 D.B. flat bar
Barbore: 31.8mm
Backsweep: 5/9degree
Width: 680/700/720/740/760mm
Weight: 340g(720mm)

2026

KING-WAY

STEM

ADJUSTABLE STEM

SEATPOSTS

HANDLE BAR

CLAMPS



www.kalloyuno.com



NEW

AS042

ISO 8098 approved

2D forged, 6061-T6 aluminum
Ext: 40mm
Angle: 20degree
Diameter: 25.4mm
Steerer: 25.4mm
Height: 35mm
Weight: 118g



AS033

ISO 4210 - M approved
EN 17404

2D forged, 6061-T6 aluminum
Ext.: 35/45mm
Angle: 0degree
Diameter: 35.0mm
Steerer: 28.6mm
Height: 42mm
Weight: 190g(45mm)



AS032

ISO 4210 - M approved
EN 17404

2D forged, 6061-T6 aluminum
Ext.: 35/45mm
Angle: 0degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 176g(45mm)





AS007N

ISO 4210 - R/M approved
EN 17404

3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120/130mm(7/17degree)
60/70/80/90/100/110mm(12degree)
Angle: 7/12/17degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 134g(90mm x 7degree)



12 degree



17 degree



ASDC1
ASDC1N

ISO 4210 - M approved
EN 17404

Die cast
Ext.: 60/75/90mm
Angle: 7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 42mm
Weight: 179g(ASDC1 75mm)
178g(ASDC1N 75mm)



ASDC1



ASDC1N



AS820
ISO 4210 - M approved
EN 17404
2D forged angle adjustable stem
Ext.: 95/110/125mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 35mm
Weight: 265g(95mm)



AS7301
ISO 4210 - C approved
Die cast angle adjustable stem
Ext.: 90/110mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 338g(110mm)



AL7301
ISO 4210 - C approved
Die Cast angle adjustable stem with quill
Ext.: 75/95mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 25.4mm
Length: 180/220mm
Weight: 480g(95mm x 180mm)





NEW

ASIC4006
ISO 4210 - C approved
2D forged angle adjustable stem
Ext: 90mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 45mm

compatible with PRESTINE®



NEW

SPF105

ISO 4210 - R/M approved
EN 17404

2D forged head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 342g(27.2mmx350mm)
Ø10mm I.C.R. in head hole





NEW

SPF104

ISO 4210 - R/M approved
EN 17404

2D forged head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 342g(27.2mmx350mm)
Ø11mm I.C.R. in head hole

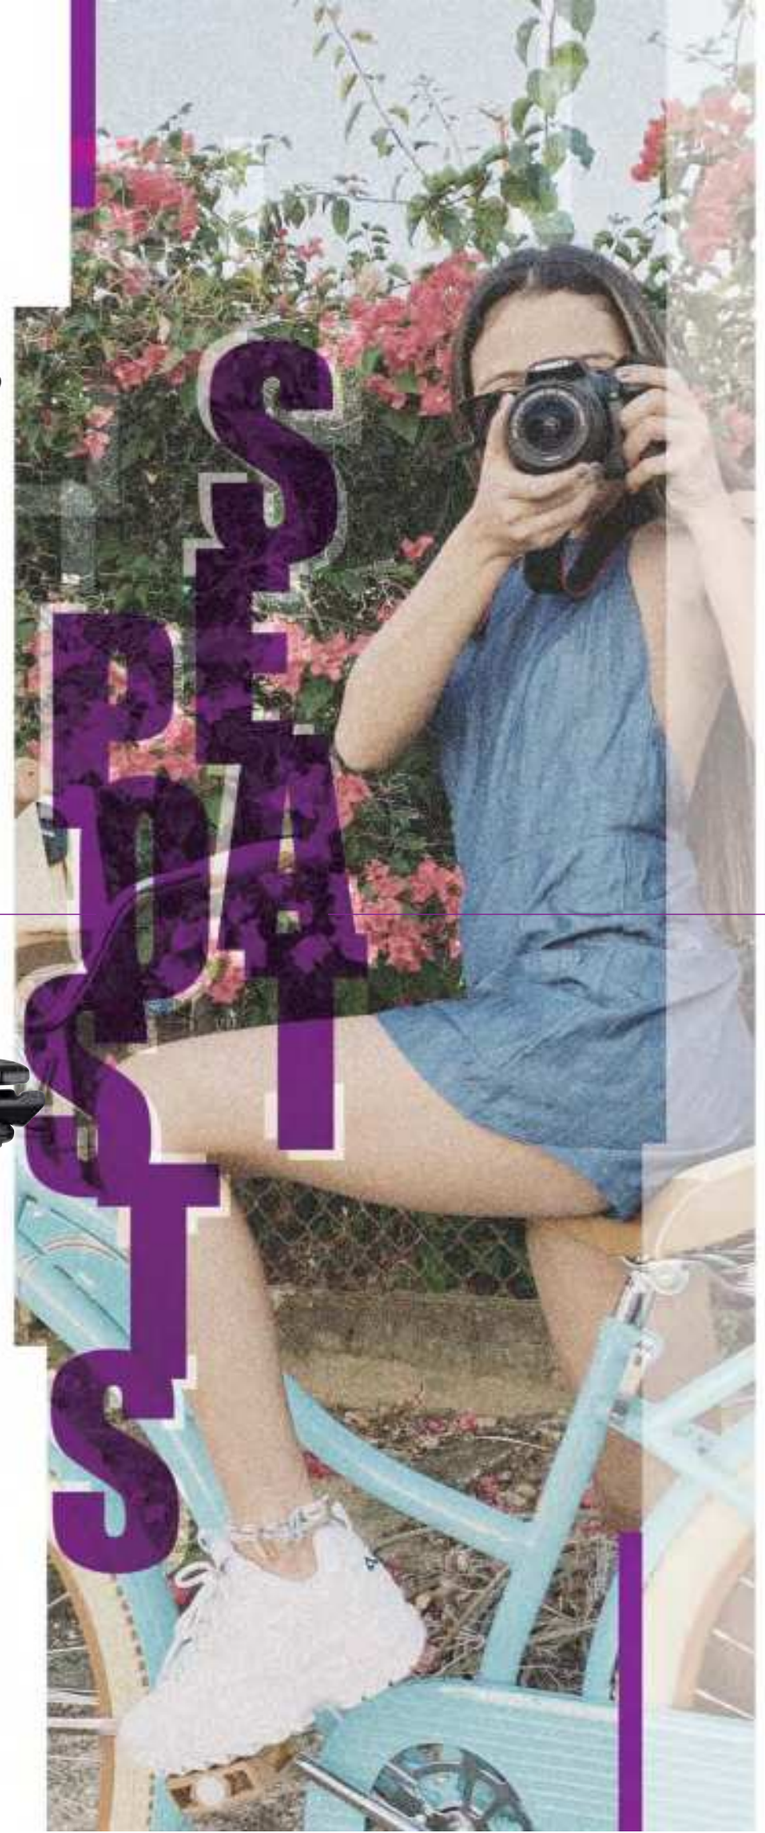

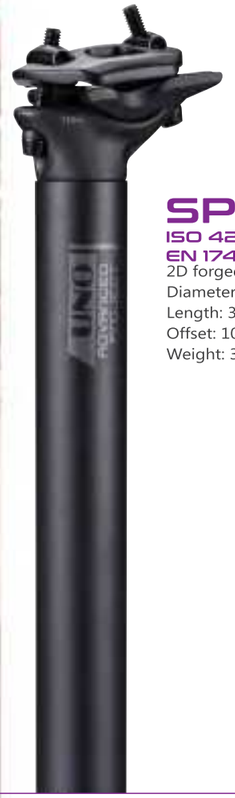

SP619

ISO 4210 - R/M approved
EN 17404

2D forged head, 6061-T6 shaft
Diameter: 27.2/30.4/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 312g(31.6mmx350mm)



SP368

ISO 4210 - R/M approved
EN 17404

2D forged head, 6061-T6 shaft
Diameter: 25.4~27.2/28.6~31.8mm
Length: 300/350/400mm
Offset: 0mm
Weight: 310g(31.6mmx350mm)



SPF102

ISO 4210 - R/M approved
EN 17404

2D forged head, 6061-T6 shaft
Diameter: 27.2/30.4/30.6/30.9/31.6/34.9mm
Length: 300/350/400mm(27.2/30.9/31.6/34.9mm)
450mm(30.4/30.6mm)
Offset: 7mm
Weight: 340g(31.6mm x 350mm)



SP620

ISO 4210 - R/M approved
EN 17404

2D forged head, 6061-T6 shaft
Diameter: 27.0/27.2/27.4/30.8/30.9/31.6mm
Length: 300/350/400mm
Offset: 24mm
Weight: 277g(31.6mmx300mm)



SPDC1

ISO 4210 - R/M approved
EN 17404

Die cast head, 6061-T6 shaft
Diameter: 26.8/27.2/30.4/30.6/30.8/30.9/31.6mm
Length: 300/350/400mm(26.8/27.2/30.4/30.6/30.8/31.6mm)
300/350/400/450mm(30.9mm)
Offset: 5mm
Weight: 332g(31.6mmx350mm)

SP341

ISO 4210 - R/M approved
EN 17404

2D forged head, 6061-T6 shaft
Diameter: 25.4~27.2/28.6~31.8mm
Length: 300/350/400mm
Offset: 14mm
Weight: 335g(31.6mm x 350mm)



HANDLEBAR



NEW

HBL106
ISO 4210 - R approved

6061 D.B. racing bar
Barbore: 31.8mm
Drop: 100mm
Reach: 70mm
Width: 380/400/420/440/460mm
Ramp angle: 10degree
Flare angle: 5degree
Weight: 312g(440mm)





HBCR22
ISO 4210-R approved

6061 D.B. racing bar
Barbore: 31.8mm
Drop: 120mm
Reach: 70mm
Width: 360/380/400/420/440/460mm
Weight: 285g(420mm)

HBCR21
ISO 4210-R approved

6061 P.G. racing bar
Barbore: 31.8mm
Drop: 120mm
Reach: 75mm
Width: 360/380/400/420/440/460mm
Weight: 355g(380mm)



Drop/Reach 120/70



HB353
ISO 4210 - M approved
EN 17404
6061 T.B. rise bar
Barbore: 35.0mm
Rise: 15/25mm
Backsweep: 5/9degree
Width: 580/680/700/720/740/760/780/800mm
Weight: 315g(780mm)



HBFB11
ISO 4210 - M approved
EN 17404
6061 P.G. flat bar
Barbore: 31.8mm
Backsweep: 0/5/9degree
Width: 540/560/580/600mm
Weight: 265g(580mm)

HBFB11L
ISO 4210 - M approved
EN 17404
6061 P.G. flat bar
Barbore: 31.8mm
Backsweep: 5/9degree
Width: 620/640/660/680/700/720mm
Weight: 375g(720mm)



HBRB12
ISO 4210 - M approved
EN 17404
6061 D.B. rise bar
Barbore: 31.8mm
Rise: 15/25mm
Backsweep: 5/9/15/25degree(15mm)
5/9/15degree(25mm)
Width: 500/520/540/560/580/600/620/640/660/670/680mm
Weight: 272g(660mm)

HBRB12L
ISO 4210 - M approved
EN 17404
6061 D.B. rise bar
Barbore: 31.8mm
Rise: 15/25mm
Backsweep: 5/9/15degree
Width: 700/720/740mm
Weight: 295g(720mm)



HBRB11
ISO 4210 - M approved
EN 17404
6061 P.G. rise bar
Barbore: 25.4/31.8mm
Rise: 20/30(25.4mm)
15/25mm(31.8mm)
Backsweep: 6/9/12degree(25.4mm)
5/9/12degree(31.8mm x 15mm)
5/9degree(31.8mm x 25mm)
Width: 500/520/540/560/580/600/620/640/660/680mm(25.4mm)
540/560/580/600/620/640/660/680mm(31.8mm)
Weight: 375g(25.4mm x 660mm)
400g(31.8mm x 660mm)

HBRB11L
ISO 4210 - M approved
EN 17404
6061 P.G. rise bar
Barbore: 31.8mm
Rise: 15/25mm
Backsweep: 5/9degree
Width: 700/720/740mm
Weight: 390g(720mm)



NEW



HBL003
ISO 4210 - M approved
6061 P.G.
Barbore: 31.8mm
Drop: 115mm
Width: 400/420/440/460mm
Flare angle: 33degree
Sweep angle: 57degree
Weight: 396g(420mm)



HBTR2
ISO 4210 - C approved
EN 15194 (E-CITY)
6061 P.G. city bar
Barbore: 31.8mm
Backsweep: 25/35/45degree
Width: 600/620/640/660/680mm
Weight: 280g(640mm)



HB411
ISO 4210 - C approved
HB411OV
ISO 4210 - C approved / EN15194(E-CITY)
6061 P.G. city bar
Barbore: 25.4mm(HB411)
31.8mm(HB411OV)
Rise: 28mm
Backsweep: 37degree
Width: 520/540/590/600/620/640/660/680mm
Weight: 268g(HB411 600mm)
290g(HB411OV 600mm)





HBTR1
ISO 4210 - C approved
6061 P.G. city bar
Barbore: 25.4mm
Backsweep: 25degree
Width: 580/600/620/640/660/680mm
Weight: 290g(640mm)



ALO30 (T2.2 / Centr:40mm)
ISO 4210 - C approved
6061 P.G. city bar
Barbore: 25.4mm
Backsweep: 34degree
Width: 560//570/580/600/610mm
Weight: 280g(610mm)



NEW

SC79



Extruded clamp
Diameter: 30.5x31.9mm
33.6x35.0mm
Height: 13mm

XC81



Extruded clamp with quick-release
Diameter: 27.6x28.7mm
30.5x31.9mm
33.6x35.0mm
Height: 15mm
Weight: 42g(33.6x35.0mm)

XC81N



Extruded clamp with quick-release
Diameter: 27.6x28.7mm
30.5x31.9mm
33.6x35.0mm
Height: 15mm
Weight: 42g(33.6x35.0mm)
Rubber color: Navy Blue

XC68



Extruded clamp with quick-release
Diameter: 27.6x28.7mm
28.4x29.8mm
28.6x30.1mm
30.5x31.9mm
33.6x35.0mm
35.1x36.5mm
Height: 15mm
Weight: 41g(33.6x35.0mm)

SC205



Extruded clamp
Diameter: 27.5x28.7mm
28.0x30.0mm
28.4x29.8mm
28.6x30.6mm
28.7x28.7mm
29.6x31.0mm
30.5x31.9mm
33.6x34.5mm
33.6x35.0mm
34.1x35.5mm
35.2x36.6mm
Height: 11mm
Weight: 27g(33.6x35.0mm)

SC204




Extruded clamp
Diameter: 27.5x28.7mm
28.0x30.0mm
28.0x30.6mm
28.4x29.8mm
30.5x31.9mm
33.0x34.1mm
33.6x34.5mm
33.6x35.0mm
35.2x36.6mm
Height: 13mm
Weight: 30g(33.6x35.0mm)


HANDLEBARS

FLARED


Model No.	material	butting	barbore	width (center to center)	drop/reach	ramp angle	flare angle	weight(420mm)
HBFL12	6061	D.B.	31.8mm	380/400/ 420/440/460mm	125/70mm	10degree	20degree	285g
HBL001	6061	P.G.	31.8mm	400/420/440/460mm	125/70mm	10degree	6/12degree	370g
HBL002	6061	P.G.	31.8mm	400/420/440/460mm	125/78mm	20degree	6/12degree	430g
HBL101	6061	D.B.	31.8mm	380/400/ 420/440/460mm	125/70mm	10degree	6/12degree	300g
HBL102	6061	D.B.	31.8mm	320/340/360/380/ 400/420/440/460mm	125/70mm	10degree	6/12degree	315g
HBL103	6061	D.B.	31.8mm	400/420/440/460mm	125/78mm	20degree	6/12degree	315g
HBL104	6061	T.B.	31.8mm	360/380/ 400/420/440mm	125/72mm	23degree	4degree	312g(440mm)
HBL106	6061	D.B.	31.8mm	380/400/ 420/440/460mm	100/70mm	10degree	5degree	312g(440mm)
HBUB22	6061	D.B.	31.8mm	560mm	100/66mm	40degree	11degree	280g(560mm)




HBL001/HBL102
HBFL12




HBL002/HBL103




HBL101



HBL104




HBL106



HBUB22

KIDS & JUNIOR SERIES


Model No.	material	butting	barbore	width (center to center)	drop/reach	ramp angle	flare angle	weight(420mm)
HBL105	6061	D.B.	31.8mm	340/360/ 380/400/420mm	100/73mm	16degree	10degree	294g



HBL105

UBS SERIES


Model No.	material	butting	barbore	width (center to center)	drop/reach	ramp angle	flare angle	weight
UBSD01	carbon		31.8mm	400/420/440mm	110/72mm	6degree	6degree	246g(420mm)
UBSD02	carbon		31.8mm	400/420/440mm	110/72mm	6degree	6degree	244g(440mm)




UBSD01/UBSD02

DROP


Model No.	material	butting	barbore	width (center to center)	drop/reach	weight
HBAR15	6061	D.B.	31.8mm	400/420/440mm	125/70mm	285g(400mm)
HBCM11	6061	P.G.	26.0mm	400/420/440mm	150/130mm	440g(420mm)
HBCM21	6061	P.G.	26.0mm	400/420/440mm	135/80mm	385g(420mm)
HBCM31	6061	P.G.	26.0mm	360/380/400/420/440mm	170/90mm	407g(380mm)
			31.8mm	380/400/420/440mm		
			26.0mm	360/380/400/420/440mm	183/108mm	
			31.8mm	380/400/420/440mm		440g(420mm)
HBCR11	6061	P.G.	31.8mm	380/400/420/440mm	125/70mm	435g(420mm)
					140/90mm	435g(400mm)
HBCR12	6061	D.B.	31.8mm	360/380/400/420 /440/460/480mm	125/70mm	300g(420mm)
				380/400/420/440mm	140/90mm	305g(400mm)
HBCR21	6061	P.G.	26.0mm	360/380/400/420/440mm	120/75mm	
			31.8mm	360/380/400 /420/440/460mm		355g(380mm)
HBCR22	6061	D.B.	31.8mm	320/340/360/380/ 400/420/440/460mm	120/70mm	285g(420mm)
HBD101	6061	D.B.	31.8mm	400/420/440/460mm		316g(420mm)
HBD102	6061	D.B.	31.8mm	380/400/420/440mm	125/70mm	306g(420mm)
HBTE11	6061	P.G.	26.0mm	380/400/420/440/460mm	150/80mm	
			31.8mm	400/420/440mm	144/77mm	425g(420mm)
HBTE12	6061	D.B.	31.8mm	400/420/440mm	144/77mm	320g(420mm)
HBTM11	6061	P.G.	31.8mm	360/380/400/420/440mm	131/75mm	425g(400mm)
HBTM12	6061	P.G.	31.8mm	380/400/420 /440/460/480mm	131/84mm	420g(400mm)
HBTM13	6061	D.B.	31.8mm	400/420/440mm	131/84mm	320g(400mm)
HBTM21	6061	P.G.	31.8mm	380/400/420/440mm	125/72mm	405g(420mm)
HBTM22	6061	P.G.	31.8mm	400/420/440mm	142/82mm	400g(420mm)
HBTM23	6061	D.B.	31.8mm	400/420/440mm	142/82mm	300g(420mm)




HBAR15




HBCM11




HBCM21




HBCM31




HBCR11/HBCR12




HBCR21/HBCR22




HBD102



HBTE11/HBTE12




HBTM11/HBTM12
HBTM13



HBTM21/HBTM22
HBTM23

HANDLEBARS

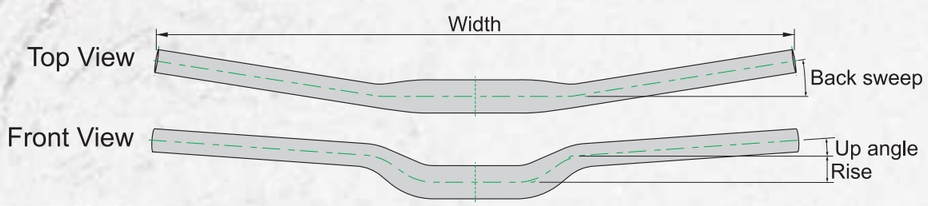

RISE

Model No.	barbore	rise	width (center to center)	backsweep	material	butting	weight
HB353	35.0mm	15/25/35mm	580/680/700/720/740/760/780/800mm	5°/ 9°	6061	T.B.	315g(780mm)
		45mm	580/680/700/720/740/760mm				
HB354	35.0mm	5mm	680/700/720/740mm	30°	6061	T.B.	332g(740mm)
HBR001	31.8mm	15mm	620/640/660/680mm	5°/ 9°	6061	P.G.	358g(640mm)
HBR001L	31.8mm	15mm	700/720/740/760/780/800mm	5°/ 9°	6061	P.G.	392g(700mm)
HBR100	31.8mm	15mm	580/600/620/640/660/680mm	5°/ 9°	6061	D.B.	278g(640mm)
HBR100L	31.8mm	15mm	700/720mm	5°/ 9°	6061	T.B.	300g(720mm)
HBR102	31.8mm	50/60mm	660/740/760/780/800mm	5°/ 9°	6061	T.B.	378g(800mm)
HBRB11	25.4mm	20/30mm	500/520/540/560/580/ 600/620/640/660/680mm	6°/9°/12°	6061	P.G.	375g(660mm)
	31.8mm	10/15mm	560/580/600/620/640/660/680mm	5°/9°/12°			400g(660mm)
		25/35mm	560/580/600/620/640/660/680mm	5°/ 9°			
HBRB11L	31.8mm	10mm	700/720mm	5°/ 9°	6061	P.G.	390g(720mm)
		15mm	700/720/740mm				
		25/35mm	700/720/740/760mm				
HBRB12	25.4mm	25mm	500/520/540/560/600 /620/640/660/680mm	8°	6061	D.B.	252g(660mm)
	31.8mm	15mm	500/520/540/560/580/600 /620/640/660//670/680mm	5°/9°/15°/25°			272g(660mm)
		25mm		5°/9°/15°			
HBRB12L	31.8mm	15/25mm	700/720/740mm	5°/ 9°/15°	6061	D.B.	295g(720mm)
HBRB12W	31.8mm	15/25mm	760/780/800mm	5°/ 9°	6061	T.B.	330g(780mm)
		35mm	620/640/700/720/ 740/760/780/800mm				
HBRB22	31.8mm	10mm	560/580/600/620/640/ 660/680/700/720/740/760mm	5°/ 9°/12°	6061	D.B.	295g(720mm)
HBUB12	31.8mm	17mm	660/680mm	15°/ 30°	6061	D.B.	295g(660mm)
QTSRB02	31.8mm	18mm	600/620/640/660/680 /700/720/740/760/780mm	8°	Carbon		182g(780mm)

FLAT

Model No.	barbore	width (center to center)	backsweep	material	butting	weight
HB351	35.0mm	620/640/660/680/700/720/740/760mm	5°/ 9°	6061	D.B.	285g(720mm)
HB352	35.0mm	620/640/660/680/700 /720/740/760/780mm	5°/ 9°	6061	D.B.	285g(720mm)
HBFB11	25.4mm	500/520/540/560/580/600/620/640mm	5°/ 9°	6061	P.G.	243g(580mm)
	31.8mm	540/560/580/600mm	0°/5°/9°			265g(580mm)
HBFB11L	31.8mm	620/640/660/680/700/720mm	5°/ 9°	6061	P.G.	375g(720mm)
HBFB12	25.4mm	500/520/540/560/580/600/620mm	5°/ 9°	6061	D.B.	205g(580mm)
	31.8mm	540/560/580/600mm	5°/9°/12°			233g(580mm)
HBFB12L	31.8mm	620/640/660/680/700/720/740mm	5°/9°/12°	6061	D.B.	235g(620mm)
HBFB21	31.8mm	540/560/580/600mm	5°/ 9°	6061	D.B.	240g(600mm)
HBFB21L	31.8mm	620/640/660/680/700/720mm	5°/ 9°	6061	D.B.	260g(680mm)
HBFB21W	31.8mm	730/740/760mm	5°/ 9°	6061	D.B.	312g(740mm)

CITY & OTHERS

Model No.	barbore	rise	width (center to center)	backsweep	material	butting	weight
AL030	25.4mm		560/570/580/600/610mm	34°	6061	P.G.	280g(610mm)
AL030K	25.4mm		580/600/610/620/640/660/680mm	34°	6061	P.G.	386g(640mm)
AL030S	31.8mm		580/600/610/620/640mm	34°	6061	P.G.	304g(640mm)
AL042	25.4mm		480/500/520/540/560/580/600mm	15°	6061	P.G.	240g(600mm)
AL042L	31.8mm		600/620/640/660/680mm	15°	6061	P.G.	260g(600mm)
AL069	25.4mm		570/585mm		6061	P.G.	500g(585mm)
AL069V	31.8mm		530/570/585mm		6061	P.G.	524g(585mm)
AL078	25.4mm	45mm	490/520/570/580/600/618mm	24°	6061	P.G.	250g(580mm)
AL078L	31.8mm	45mm	600/620/640mm	24°	6061	P.G.	275g(620mm)
AL080	25.4mm	55mm	580/600/620mm	40°	6061	P.G.	280g(600mm)
AL080L	31.8mm	55mm	580/600/620/640/660/680mm	40°	6061	P.G.	304g(600mm)
AL080S	31.8mm	55mm	580/600/620/640/660/680mm	40°	6061	P.G.	330g(640mm)
AL081	25.4mm	50mm	535/560/580/610mm	59°	6061	P.G.	312g(580mm)
AL092	25.4mm	70mm	520/540/560/580/600/620mm	50°	6061	P.G.	300g(580mm)
HB411E	25.4mm	28mm	520/540/560/580/600/620/640mm	37°	6061	P.G.	274g(600mm)
HB411OV	31.8mm	28mm	520/540/560/600 /620/640/660/680mm	37°	6061	P.G.	290g(600mm)
HBC101	31.8mm		640/700mm	21°	6061	D.B.	352g(700mm)
HBL003	31.8mm		400/420/440/460mm		6061	P.G.	396g(420mm)
HBTR1	25.4mm		580/600/620/640/660/680mm	25°	6061	P.G.	290g(640mm)
HBTR2	31.8mm		600/620/640/660/680mm	25°/ 35°/45°	6061	P.G.	280g(640mm)
HBTR3	25.4mm		600/620/640/660/680mm	11°	6061	P.G.	265g(640mm)
HBTR4	31.8mm		620/640/660/680/700/720mm	11°	6061	P.G.	275g(640mm)

KIDS & JUNIOR SERIES

Model No.	barbore	rise	width (center to center)	backsweep	material	butting	weight
AL029H	25.4mm	50mm	440/460mm	9°	6061	P.G.	
HB029DB	25.4mm	40/50mm	520/560/600mm	9°	6061	D.B.	279g(650mm)
HB029HDB	25.4mm	50/70mm	460mm	9°	6061	D.B.	166g(460mm)
HBFB12S	25.4mm		420mm	9°	6061	D.B.	144g(420mm)
HBRB12S	25.4mm	20mm	460mm	9°	6061	D.B.	156g(460mm)

HD SERIES

Model No.	barbore	rise	width (center to center)	backsweep	material	butting	weight
HBHF101	31.8mm		680/700/720/740/760mm	5°/ 9°	6061	D.B.	340g(720mm)
HBHT101	31.8mm		680/700/720/740/760mm	5°/ 9°	6061	D.B.	340g(720mm)
HBHR101	31.8mm	25mm	660/680/700/720/740/760/780mm	5°/ 9°	6061	D.B.	360g(760mm)

UBS SERIES

Model No.	barbore	rise	width (center to center)	backsweep	material	butting	weight
UBSF01	31.8mm		700/720/740/760/780/800mm	9°	Carbon		196g(780mm)
UBSR01	31.8mm	15mm	540/700/720/740/760/780/800mm	9°	Carbon		196g(780mm)