

MY2020 Zoom Catalog Landscape - V15.indd 1 2018/9/18 09:04

CONTENTS

06 SUSPENSION FORKS

20 STEMS

38 HANDLE BARS

52 SEATPOSTS

62 BAR ENDS

64 SEAT CLAMPS/PEDALS

66 SPEC CHARTS



SUSPENSION FORKS

zoom

PRECISION STEERING COMPONENTS

SEAT CLAMPS / PEDALS

MY2020 Zoom Catalog Landscape - V15.indd 2-3

2018/9/18 09:04

SUSPENSION FORK FUNCTION

MTB / E-BIKE / TREKKING / CITY

Be prepared for anything the road or trail throws at you. Adventure is just around the corner. Whether a seasoned pro or consummate weekend warrior, Zoom has the right components for the job. In any ride, race, or retreat, you can count on Zoom components for precision handling and confidence inspiring performance.

CA
COMPRESSION ADJUST

Wide-range adjustable compression damping lets you adapt to all types of rough terrain.

CM
CLIMB MODE

The fork can be tuned to your specific body weight and riding style for soft to firm suspension response with the quick turn of a knob.

RA
HYDRAULIC REBOUND ADJUST

Adjustable hydraulic rebound offers the widest range of damping performance for any road or trail condition.

RL/O RA
REMOTE AIR LOCK-OUT
HYDRAULIC REBOUND ADJUST

HL/O RA
HYDRAULIC LOCK-OUT
HYDRAULIC REBOUND ADJUST

RL/O
REMOTE AIR LOCK-OUT

Smart ergonomics via the handlebar remote means that you can instantly lockout your suspension with the flick of a lever.

HL/O
HYDRAULIC LOCK-OUT

Robust and easy to actuate, our hydraulic lockout can be actuated from the handlebar or fork crown to instantly lockout the fork and remove any unwanted suspension motion.

ML/O
MECHANICAL LOCK-OUT

Our mechanical lockout also instantly cancels suspension function via an internal system which decouples spring compression.

AMS
PRE-LOAD ADJUST

The fork can be adjusted according to your weight. You can easily adjust the suspension performance to be soft or hard by quick turning on the knob.

MY2020 Zoom Catalog Landscape - V15.indd 4-5 2018/9/18 09:05

SUSPENSION FORKS

DRIFT / VAXA / ARIA / MASERA



DRIFT32

LIGHT, STIFF, ACTION-SMOOTH

Experience DRIFT and ride suspension like no other!

▸ISO4210
MTB

MODEL NO	832 AIR
WHEEL SIZE	27.5"
PITCH	130mm
FEATURES	· Climb Mode · Compression Adjustable · Rebound Adjustable · Air Spring
CROWN	Forged Alloy
LOWER LEG	One-Piece Magnesium
STANCHIONS	ø32mm AL 7050 Hard Anodized
BRAKE	Disc Brake(PM)
ROTOR	160mm
AXLE	15mm QR
WEIGHT	1.67kg
TRAVEL	100 120 140

MY2020 Zoom Catalog Landscape - V15.indd 6-7
2018/9/18 09:05

VAXA

A POWERFUL RIDING EXPERIENCE

VAXA has been developed to fully appreciate the thrill of offroad riding.

▸ISO4210 MTB	VAXA 32S EO 27.5+	VAXA 32S ET 27.5+
MODEL NO	866S AMS	868S AMS
WHEEL SIZE	27.5+ 24+	27.5+
PITCH	148mm	
FEATURES	· Adjustable Preload · Remote Lock-Out · Hydraulic Lock-Out · Coil Spring	
CROWN	Forged Alloy	
LOWER LEG	One-Piece Magnesium ø40mm	
STANCHIONS	ø32mm Steel Tube(CP)	
BRAKE	Disc Brake(PM)	
ROTOR	160mm	
AXLE	9	15mm QR
HUB WIDTH	110	
WEIGHT	2.2kg 2.3kg	2.3kg
TRAVEL	100mm 27.5+ 60mm 24+	





VAXA 32 EO 27.5

▸ISO4210 MTB	
MODEL NO	862 AIR
WHEEL SIZE	29" 27.5"
PITCH	130mm
FEATURES	· Remote Lock-Out · Hydraulic Lock-Out · Air Spring
CROWN	Forged Alloy
LOWER LEG	One-Piece Magnesium ø40mm
STANCHIONS	ø32mm AL 6061 Hard Anodized
BRAKE	Disc Brake(PM)
ROTOR	160mm
AXLE	15mm QR
WEIGHT	1.85kg
TRAVEL	100mm



▸ISO4210 MTB	VAXA 32AIR	VAXA 32S
MODEL NO	860 AIR	860S AMS
WHEEL SIZE	27.5" 26"	29" 27.5" 26"
PITCH	130mm	
FEATURES	· Remote Lock-Out · Hydraulic Lock-Out · Air Spring	· Adjustable Preload · Remote Lock-Out · Hydraulic Lock-Out · Hydraulic Rebound Lock-Out
CROWN	Forged Alloy	
LOWER LEG	One-Piece Magnesium ø40mm	
STANCHIONS	ø32mm AL 6061 Hard Anodized	ø32mm Steel Tube (CP)
BRAKE	Disc Brake(PM)	
ROTOR	160mm	
WEIGHT	1.9kg	2.2kg
TRAVEL	100mm	

MY2020 Zoom Catalog Landscape - V15.indd 8-9
2018/9/18 09:05



VAXA 30S



525AMS 24/20



VAXA 28S

▸ISO4210 MTB	
MODEL NO	595S AMS
WHEEL SIZE	29" 27.5" 26"
PITCH	130mm
FEATURES	· Adjustable Preload · Remote Lock-Out · Hydraulic Lock-Out
CROWN	Forged Alloy
LOWER LEG	One-Piece Magnesium ø40mm
STANCHIONS	ø30mm Steel Tube (CP)
BRAKE	Disc Brake(PM)
ROTOR	160mm
WEIGHT	2.1kg
TRAVEL	100mm

▸ISO4210 MTB	
MODEL NO	525 AMS
WHEEL SIZE	29" 27.5" 26" 24" 20"
PITCH	125mm
FEATURES	· Adjustable Preload · Remote Lock-Out · Hydraulic Lock-Out
CROWN	Forged Alloy
LOWER LEG	One-Piece Sluminum ø37mm
STANCHIONS	ø28.6mm Steel Tube(CP)
BRAKE	Disc Brake(PM) 24/20 PM+V-Brake
ROTOR	160mm
WEIGHT	1.98kg
TRAVEL	100mm 29" 27.5" 26" 60mm 24" 40mm 20"











▸ISO4210 MTB	565	565D	680DH AMS	680 AMS
WHEEL SIZE	29" 27.5" 26" 24" 20"	29" 27.5" 26" 24" 20"	29" 26"	29" 26"
PITCH	125mm (29" 27.5") 120mm (26" 24" 20")	125mm (29" 27.5") 120mm (26" 24" 20")	140mm	
FEATURES	· Adjustable Preload · Machanical Lock-Out · Hydraulic Lock-Out		· Adjustable Preload · 20mm Through Axle · Hydraulic Rebound Adjust	
CROWN	Forged Alloy		Forged Alloy	
LOWER LEG	One-Piece AlumInum ø35.0mm		One-Piece Magnesium ø47.0mm	
STANCHIONS	ø25.4mm Steel Tube(CP)		ø37.5mm AL 6061 Hard Anodized	
BRAKE	29" 27.5" Disc Brake(PM) and V-brake 26" 24" 20" Disc Brake(IS) and V-brake	Disc Brake(PM)	Disc Brake (PM)	
ROTOR			160	
WEIGHT	1.8kg	1.7kg	3.63kg	2.55kg
TRAVEL	29" 80mm 27.5" 80mm 26" 80mm 24" 50mm 20" 40mm	29" 80mm 27.5" 80mm 26" 80mm 24" 50mm 20" 40mm	170mm	140mm

MY2020 Zoom Catalog Landscape - V15.indd 10-11
2018/9/18 09:06



106

PATENT

▸ISO4210
CITY

WHEEL SIZE	700C 20"
FEATURES	· Mono Shock
LOWER LEG	One-Piece Magnesium
BRAKE	Disc Brake(IS) and V-Brake
ROTOR	160mm
WEIGHT	1.5kg
TRAVEL	25mm

106D



▸ISO4210
CITY

WHEEL SIZE	700C 20"
FEATURES	· Mono Shock
LOWER LEG	One-Piece Magnesium
BRAKE	Disc Brake(IS)
ROTOR	160mm
WEIGHT	1.5kg
TRAVEL	25mm



730 AMS

▸ISO4210
PEDELEC

WHEEL SIZE	700C
PITCH	107mm
FEATURES	· Adjustable Preload · Mechanical Lock-Out
CROWN	Forged Alloy
LOWER LEG	One-Piece Aluminum ø34.5mm
STANCHIONS	ø28.6mm Steel Tube(CP)
BRAKE	V-Brake and Disc Brake (IS)
ROTOR	160mm
WEIGHT	2.05kg
TRAVEL	50mm



730 AMS 20"

▸ISO4210
PEDELEC

WHEEL SIZE	20"
PITCH	107mm
FEATURES	· Adjustable Preload · Mechanical Lock-Out
CROWN	Forged Alloy
LOWER LEG	One-Piece Aluminum ø34.5mm
STANCHIONS	ø28.6mm Steel Tube(CP)
BRAKE	V-Brake and Disc Brake(IS)
ROTOR	160mm
WEIGHT	1.8kg
TRAVEL	30mm

MY2020 Zoom Catalog Landscape - V15.indd 12-13
2018/9/18 09:07



187AMS

▸ISO4210 PEDELEC

WHEEL SIZE	700C 26"
PITCH	116mm
FEATURES	· Adjustable Preload · Hydraulic Lock-Out · Remote Lock-Out
CROWN	Forged Alloy
LOWER LEG	One-Piece Aluminum ø39.0mm
STANCHIONS	ø30mm Steel Tube (CP)
BRAKE	Disc Brake (PM) and V-Brake
ROTOR	160mm
WEIGHT	2.19kg
TRAVEL	700C 65mm / 26" 60mm



187DAMS

▸ISO4210 PEDELEC

WHEEL SIZE	700C 26"
PITCH	116mm
FEATURES	· Adjustable Preload · Hydraulic Lock-Out · Remote Lock-Out
CROWN	Forged Alloy
LOWER LEG	One-Piece Aluminum ø39.0mm
STANCHIONS	ø30mm Steel Tube (CP)
BRAKE	Disc Brake (PM)
ROTOR	160mm
WEIGHT	2.19kg
TRAVEL	700C 65mm / 26" 60mm



188DS AMS

▸ISO4210 PEDELEC

WHEEL SIZE	700C
PITCH	120mm
FEATURES	· Adjustable Preload · Hydraulic Lock-Out · Remote Lock-Out
CROWN	Forged Alloy
LOWER LEG	One-Piece Magnessium ø42mm
STANCHIONS	ø32mm Butted Hi-Ten Tube (CP)
BRAKE	Disk Brake (PM)
ROTOR	160mm
AXLE	15mm
WEIGHT	2.5kg
TRAVEL	65mm



141

▸ISO4210 CITY

WHEEL SIZE	700C 26"
PITCH	107mm
FEATURES	· Adjustable Preload · Mechanical Lock-Out
CROWN	Forged Alloy
LOWER LEG	One-Piece Aluminum ø 35.0mm
STANCHIONS	ø25.4mm Steel Tube (CP)
BRAKE	Disc Brake/Roller-Brake and V-Brake
ROTOR	160mm
WEIGHT	1.74kg
TRAVEL	45mm



141D

▸ISO4210 CITY

WHEEL SIZE	700C
PITCH	107mm
FEATURES	· Adjustable Preload · Mechanical Lock-Out
CROWN	Forged Alloy
LOWER LEG	One-Piece Aluminum ø 35.0mm
STANCHIONS	ø25.4mm Steel Tube (CP)
BRAKE	Disc Brake/Roller-Brake
ROTOR	160mm
WEIGHT	1.74kg
TRAVEL	45mm



628A

▸ISO4210 MTB

WHEEL SIZE	27.5 26 24 20 24+/20+
PITCH	140mm
FEATURES	Spring Pressure System
CROWN	Forged Alloy
LOWER LEG	ø38.1mm Welded Hi-Ten
STANCHIONS	ø30.0mm Steel Tube (CP)
BRAKE	Disc Brake (IS) And V-Brake
ROTOR	160mm
WEIGHT	2.6kg
TRAVEL	27.5/27.5+/26 80mm 24/24+ 50mm 20/20+ 40mm

MY2020 Zoom Catalog Landscape - V15.indd 14-15
2018/9/18 09:07



389

XLT
XLT
XLT
AMS

▸ISO4210
MTB

WHEEL SIZE	29" 27.5" 26" 24" 20''
PITCH	125mm
FEATURES	· Adjustable Preload · Spring Pressure System · Mechanical Lock-Out System · Hydraulic Lock-Out
CROWN	Forged Alloy
LOWER LEG	ø34.9mm Welded Hi-Ten
STANCHIONS	ø28.6mm Steel Tube (CP)
BRAKE	Disc Brake (IS) and V-Brake
ROTOR	160mm
WEIGHT	2.18kg
TRAVEL	29" 27.5" 26" 80mm 24" 50mm 20" 40mm



386A

▸ISO4210
MTB

WHEEL SIZE	29" 27.5" 26" 24" 20"
PITCH	125mm
FEATURES	· Adjustable Preload · Mechanical Lock-Out
CROWN	Forged Alloy
LOWER LEG	ø34.9mm Welded Hi-Ten
STANCHIONS	ø25.4mm Steel Tube (CP)
BRAKE	Disc Brake (IS)
ROTOR	160mm
WEIGHT	2.03kg
TRAVEL	29" 60mm 27.5" 60mm 26" 60mm 24" 50mm 20" 40mm

386

▸ISO4210
MTB

WHEEL SIZE	29" 27.5" 26" 24" 20"
PITCH	125mm
FEATURES	· Adjustable Preload · Mechanical Lock-Out
CROWN	Forged Alloy
LOWER LEG	ø34.9mm Welded Hi-Ten
STANCHIONS	ø25.4mm Steel Tube(cp)
BRAKE	Disc Brake(IS) & V-Brake
ROTOR	160mm
WEIGHT	2.08kg
TRAVEL	29" 60mm 27.5" 60mm 26" 60mm 24" 50mm 20" 40mm



620 DH

▸ISO4210
MTB

WHEEL SIZE	26" 24" 20"
PITCH	130mm
FEATURES	· Spring Pressure System
CROWN	Forged Alloy
LOWER LEG	ø44.5mm Welded Hi-Ten
STANCHIONS	ø37.5mm Steel Tube(cp)
BRAKE	Disc Brake(IS) and V-Brake
ROTOR	160mm
WEIGHT	3.42kg
TRAVEL	26" 60mm 24" 50mm 20" 40mm



621 DH

▸ISO4210
MTB

WHEEL SIZE	26" 24" 20"
PITCH	130mm
FEATURES	· Spring Pressure System
CROWN	Pressed Steel
LOWER LEG	ø44.5mm Welded Hi-Ten
STANCHIONS	ø37.5mm Steel Tube(BED)
BRAKE	Disc Brake(IS) and V-Brake
ROTOR	160mm
WEIGHT	3.56kg
TRAVEL	26" 60mm 24" 50mm 20" 40mm

MY2020 Zoom Catalog Landscape - V15.indd 16-17
2018/9/18 09:08



410E

▸ISO4210
MTB

WHEEL SIZE	26" 24" 20"
PITCH	107mm
FEATURES	· Adjustable Preload · Machanical Lock-Out
CROWN	Forged Alloy
LOWER LEG	ø31.8mm Welded Hi-Ten
STANCHIONS	ø25.4mm Steel Tube (CP)
BRAKE	V-Brake
WEIGHT	1.8kg
TRAVEL	26" 50mm 24" 40mm 20" 30mm



128

▸ISO4210
PEDELEC

WHEEL SIZE	700C 26"
PITCH	116mm
FEATURES	· Adjustable Preload · Machanical Lock-Out
CROWN	Forged Alloy
LOWERLEG	ø34.9mm Welded Hi-Ten
STANCHIONS	ø28.6mm Steel Tube (CP)
BRAKE	V-Brake
WEIGHT	1.94Kg
TRAVEL	30mm



120E

▸ISO4210
CITY

WHEEL SIZE	700C 26"
PITCH	107mm
FEATURES	· Adjustable Preload · Machanical Lock-Out
CROWN	Forged Alloy
LOWER LEG	ø31.8mm Welded Hi-Ten
STANCHIONS	ø25.4mm Steel Tube (CP)
BRAKE	V-Brake
WEIGHT	1.74kg
TRAVEL	30mm



329L

▸ISO4210
MTB

WHEEL SIZE	26" 24" 20"
PITCH	107mm
FEATURES	· Spring Pressure System
CROWN	Pressed Steel
LOWER LEG	ø31.8mm Welded Hi-Ten
STANCHIONS	ø25.4mm Steel Tube (CP)
BRAKE	V-Brake
WEIGHT	1.9kg
TRAVEL	26" 50mm 24" 40mm 20" 30mm



327E

▸ISO4210
MTB

WHEEL SIZE	26" 24" 20"
PITCH	107mm
FEATURES	· Spring Pressure System
CROWN	Pressed Steel
LOWER LEG	ø31.8mm Welded Hi-Ten
STANCHIONS	ø25.4mm Steel Tube (CP)
BRAKE	V-Brake
WEIGHT	1.88kg
TRAVEL	26" 50mm 24" 40mm 20" 30mm



130

▸ISO4210
CITY

WHEEL SIZE	700C 26"
PITCH	107mm
FEATURES	Spring Pressure System
CROWN	Pressed Steel
LOWER LEG	ø31.8mm Welded Hi-Ten
STANCHIONS	ø25.4mm Steel Tube (CP)
BRAKE	V-Bake
WEIGHT	1.9kg
TRAVEL	30mm

MY2020 Zoom Catalog Landscape - V15.indd 18-19 2018/9/18 09:09



AHEAD TYPE

RISE	ITEM NO.	EXTENSION								BARBORE		
-12°	TDS-RD605-8FOV/ISO-M	40	50							○	● 31.8	○
	TDS-RD605-8-35/ISO-M	40	50							○	○	● 35
-10°	TDS-RD702A-8FOV/ISO-R	80	90	100	110	120	130			○	● 31.8	○
-7°	TDS-RD701-8FOV/ISO-R	80	90	100	110	120				○	● 31.8	○
0°	TDS-D600-8FOV/ISO-M	50	60	70	80	90	100	110	120	○	● 31.8	○
	TDS-D622-8FOV/ISO-M	40	50							○	● 31.8	
	TDS-D622-8-35/ISO-M	40	50							○	○	● 35
	TDS-D626-8-35/ISO-M	35								○	○	● 35
15°	TDS-C340-8/FOV/ISO-M	60	75	90	105	120				● 25.4	● 31.8	○
17°	TDS-C369A-8/FOV/ISO-M	90	110							● 25.4	○	○
25°	TDS-C41-8/ISO-M	90	110							● 25.4	○	○
	TDS-C340-8/ISO-M	70	90	105	120					● 25.4	○	○
	TDS-D499A-8FOV/ISO-M	90	100	100						○	● 31.8	○
30°	TDS-D617-8FOV/EN15194	60								○	● 31.8	○
	TDS-D625-8FOV/EN15194	60								○	● 31.8	○
	TDS-C614-5/ISO-C	40								● 25.4	○	○
	TDS-AL-408-8FOV/ISO-M	50								○	● 31.8	○
40°	TDS-C41-8/ISO-M	90	110							● 25.4	○	○
×3°	TDS-D601-8FOV/ISO-M	50	60	70	80					○	● 31.8	○
	TDS-D611-8FOV/ISO-M	40	50	60						○	● 31.8	○
	TDS-C342-8FOV/ISO-M	45	60							○	● 31.8	○
×6°	TDS-C301-8FOV/ISO-M	60	75	90						○	● 31.8	○
×7°	TDS-D607-8-35/ISO-R/ISO-M	45	55	65						○	○	● 35
	TDS-D507-8FOV/ISO-M	60	70	80	90	100	110	120		○	● 31.8	○
	TDS-D479-8FOV/ISO-M	60	70	80	90	100				○	● 31.8	○
	TDS-D343B-8/ISO-M	60	70	80	90	100	110	120		● 25.4	● 31.8	○
×10°	TDS-D120A-8/ISO-M	60	70	80	90	100	110	120		● 25.4	○	○
	TDS-C41-8/ISO-M	60	75	90	105	110	120			● 25.4	○	○
	TDS-C302-8FOV/ISO-M	75	90	105						○	● 31.8	○
×15°	TDS-D507-8FOV/ISO-M	60	70	80	90	100	110	120		○	● 31.8	○
	TDS-C41-8/ISO-M	60	75	90	105	110	120			● 25.4	○	○
×17°	TDS-D602-8FOV/ISO-M	60	70	80	90					○	● 31.8	○
	TDS-D120A-8/ISO-M	40	50	60	70	80	90	100	110	120	● 25.4	○	○
×25°	TDS-D120A-8/ISO-M	60	70	80	90	100	110	120			● 25.4	○	○

QUILL TYPE

RISE	ITEM NO.	EXTENSION			BARBORE		AHEAD		
-17°	HE-AD77-2/5/ISO-C	70	90	110	○	● 25.4	○	● 22.2	● 25.4
	HE-C80D-2/ISO-C	80	100		○	● 25.4	○	● 22.2	○
-10°	HE-AD77-2/5/ISO-C	70	90	110	○	● 25.4	○	● 22.2	● 25.4
0°	HE-AD77-2/5/ISO-C	70	90	110	○	● 25.4	○	● 22.2	● 25.4
	MX-625-8/ISO-M	48			● 22.2	○	○	● 22.2	● 25.4
	MX-628-8/ISO-M	48			● 22.2	○	○	○	○
	MX-C631-8/ISO-M	50			● 22.2	○	○	○	○
	MX-413-5/8/ISO-M	48			● 22.2	○	○	○	○
	MX-C630-8/ISO-M	50			● 22.2	○	○	○	○
	MX-C784-2	32			● 22.2	○	● 21.1	● 22.2	● 25.4
10°	MTS-319-2/5/ISO-M	75	90	105	○	● 25.4	○	● 22.2	● 25.4
20°	HA-C39-2/5/ISO-C	40			○	● 25.4	○	● 22.2	● 25.4
25°	MTS-319-2/5/ISO-M	75	90	105	○	● 25.4	○	● 22.2	● 25.4
30°	HS-C40-2/ISO-C	40			○	● 25.4	○	● 22.2	○
	HS-C60-2/ISO-C	60			○	● 25.4	○	● 22.2	○
	HS-C80-2/5/ISO-C	80			○	● 25.4	○	● 22.2	● 25.4
	HA-C40-2/5/ISO-C	40			○	● 25.4	○	● 22.2	● 25.4
	HA-C40-2/5SUS/ISO-C	40			○	● 25.4	○	● 22.2	● 25.4
	HA-C60-2/5/ISO-C	60			○	● 25.4	○	● 22.2	● 25.4
	HA-C80-2/5/ISO-C	80			○	● 25.4	○	● 22.2	● 25.4
35°	HS-C398-2/5/ISO-C	90			○	● 25.4	○	● 22.2	● 25.4
40°	MTS-319-2/5/ISO-M	75	90	105	○	● 25.4	○	● 22.2	● 25.4

ADJUSTABLE

RISE	ITEM NO.	EXTENSION			BARBORE		AHEAD	
0°–60°	TDS-AL-306-8/ISO-C	110			● 25.4	○	○	○
	TDS-AL-476/5/ISO-C	110			● 25.4	○	○	○
	MTS-AL-476/5SUS/ISO-C	110			● 25.4	○	○	● 25.4
	MTS-D367N-2/5/FOV/ISO-C	90	110		● 25.4	● 31.8	● 22.2	● 25.4
	TDS-D299N-8/FOV/ISO-C	105	125		● 25.4	● 31.8	○	○
0°–90°	TDS-D616-8FOV/ISO-M	75	90	105	○ 25.4	● 31.8	○	● 31.8
	MTS-C533-5/ISO-C	110			● 25.4	○	○	● 25.4
	TDS-C533-8/ISO-C	110			● 25.4	○	○	○
	MTS-C269-5FOV/ISO-C	90	110		● 25.4	● 31.8	○	● 25.4
	TDS-C269-8/FOV/ISO-C	90	110		● 25.4	● 31.8	○	○
-10°–+50°	MTS-C397-2/5/ISO-C	90	110		● 25.4	○	● 22.2	● 25.4
	TDS-C276-8/ISO-C	100	120		● 25.4	○	○	○
	MTS-C297-2/5/ISO-C	90	110		● 25.4	○	● 22.2	● 25.4
	TDS-C297-8/ISO-C	105	125		● 25.4	○	○	○
	MTS-C331-2/5/ISO-C	90	110		● 25.4	○	● 22.2	● 25.4
	TDS-C331-8/ISO-C	105	125		● 25.4	○	○	○
	MTS-C272-5/EN15194	90	110		● 25.4	○	○	● 25.4
	MTS-C272-5/EN15194	105	125		● 25.4	○	○	○

MY2020 Zoom Catalog Landscape - V15.indd 20-21
2018/9/18 09:09



NOW FINELY-TUNED FIT IS SIMPLE AND ELEGANT

Now a micro adjustable headset spacer system is available to finely tune an exact fit, no matter what your body shape.





- Innovative tapered stem body integrated with modern frame designs
- Aerodynamic profile while stiffer and stronger
- Aerodynamic profile while stiffer and stronger
- Exclusive spacers can be flip-flopped
- Normal spacers and cover will match
- SHIMANO DI2 inner cable routing

TDS-RD702A-8F0V/ISO-R

MATERIAL	3D Forged Alloy
BARBORE	ø31.8
EXT	80 90 100 110 120 130
RISE	-10°
HEIGHT	35mm
FINISH	Sand Blasted Anodized Black or Silver



EXCELLENT STEERING PERFORMANCE

CODE 7 stems have been engineered to precisely translate rider's input into steering dynamics,you will ride faster with more confidence.



TDS-RD701-8F0V/ISO-R

MATERIAL	3D Forged Alloy
BARBORE	ø31.8
EXT	80 90 100 110 120 130
RISE	-7°
HEIGHT	41
FINISH	Sand Blasted Anodized Black or Silver

MY2020 Zoom Catalog Landscape - V15.indd 22-23
2018/9/18 09:09

E-MTB





TDS-RD605-8-35/ISO-M
TDS-RD605-8FOV(31.8mm)/ISO-M

MATERIAL	3D Forged Alloy
BARBORE	ø31.8 ø35
EXT	40 50
RISE	-12°
HEIGHT	40
FINISH	Sand Blasted Anodized Color

TDS-D622-8FOV/ISO-M/DIN*(M)
TDS-D622-8-35/ISO-M/DIN*(M)

MATERIAL	3D Forged Alloy
BARBORE	ø31.8 ø35
EXT	40 50mm
RISE	0°
HEIGHT	36mm
FINISH	Sand Blasted Anodized Black or Silver







TDS-D607-8-35/ISO-M
TDS-RD607-8-35/ISO-M

MATERIAL	3D Forged Alloy
BARBORE	ø35
EXT	45 55 65
RISE	±7°
HEIGHT	40
FINISH	Sand Blasted Anodized Color

TDS-D626-8-35/ISO-M/DIN*(M)

MATERIAL	3D Forged Alloy
BARBORE	ø35
EXT	35
RISE	0
HEIGHT	40
FINISH	Sand Blasted Anodized Black or Silver



MY2020 Zoom Catalog Landscape - V15.indd 24-25
2018/9/18 09:09



TDS-D600A-8FOV/ISO-M

MATERIAL	3D Forged Alloy
BARBORE	ø31.8
EXT	50 60 70 80 90 100 110 120
RISE	0°
HEIGHT	41
FINISH	Sand Blasted Anodized Black or Silver



TDS-D600B-8FOV/ISO-M



TDS-D601-8FOV/ISO-M
TDS-RD601-8FOV/ISO-M

MATERIAL	3D Forged Alloy
BARBORE	ø31.8
EXT	40 50 60 70 80
RISE	±3°
HEIGHT	45
FINISH	Sand Blasted Anodized Black or Silver



TDS-D601A-8FOV/ISO-M
TDS-RD601A-8FOV/ISO-M



TDS-D602-8FOV/ISO-R/M
TDS-RD602-8FOV/ISO-R/M

MATERIAL	3D Forged Alloy
BARBORE	ø31.8
EXT	60 70 80 90
RISE	-17°
HEIGHT	42
FINISH	Sand Blasted Anodized Black or Silver



TDS-D611-8FOV/ISO-M
TDS-RD611-8FOV/ISO-M

MATERIAL	3D Forged Alloy
BARBORE	ø31.8
EXT	40 50 60
RISE	±3°
HEIGHT	45mm
FINISH	Sand Blasted Anodized Black or Silver

TDS-D507A-8FOV/ISO-M
TDS-RD507A-8FOV/ISO-R

MATERIAL	3D Forged Alloy
BARBORE	ø31.8
EXT	(+7°) 40 50 60 70 80 90 100 110 120 (±15°) 70 80 90 100 110 120
RISE	±7° ±15°
HEIGHT	41
FINISH	Sand Blasted Anodized Black or Silver





TDS-D507C-8FOV/ISO-M
TDS-RD507C-8FOV/ISO-M



TDS-D507G-8FOV/ISO-M
TDS-RD507G-8FOV/ISO-M



TDS-D479-8FOV/ISO-M
TDS-RD479-8FOV/ISO-R

MATERIAL	3D Forged Alloy
BARBORE	ø31.8
EXT	60 70 80 90 100
RISE	±7°
HEIGHT	41
FINISH	Sand Blasted Anodized Black or Silver



TDS-D343B-8/ISO-M
TDS-RD343B-8/ISO-R

MATERIAL	3D Forged Alloy
BARBORE	ø25.4
EXT	60 70 80 90 100 110 120mm
RISE	±7° ±15° ±25°
HEIGHT	42
FINISH	Sand Blasted Anodized Black or Silver



TDS-D343G-8/ISO-M

MY2020 Zoom Catalog Landscape - V15.indd 26-27
2018/9/18 09:09



TDS-D499A-8FOV/ISO-M

MATERIAL	Forged alloy / alloy
BARBORE	ø31.8
EXT	90 100 110
RISE	25°
HEIGHT	50mm
FINISH	Sand Blasted Anodized Black or Silver



TDS-AL-408-8FOV/ISO-M

MATERIAL	Forged alloy
BARBORE	ø31.8
EXT	50
RISE	30°
HEIGHT	35
FINISH	Sand Blasted Anodized Black or Silver



TDS-D120A-8/ISO-M
TDS-RD120A-8/ISO-R

MATERIAL	3D Forged Alloy
BARBORE	ø25.4
EXT	(±10°/ ±25°)60 70 80 90 100 110 120 (±17°)40 50 60 70 80 90 100 110 120
RISE	±10° ±17° ±25°
HEIGHT	41 45(E:40 ±17°)
FINISH	Sand Blasted Anodized Black or Silver



TDS-C301-8FOV/ISO-M

MATERIAL	Die-Casting Alloy
BARBORE	ø31.8
EXT	60 75 90
RISE	±6°
HEIGHT	41
FINISH	Black / Matte Black



TDS-C342-8/FOV/ISO-M

MATERIAL	Die-Casting Alloy
BARBORE	ø31.8 ø25.4
EXT	40(ø25.4) 45 60
RISE	±3° (ø31.8) ±7° (ø25.4)
HEIGHT	41
FINISH	BED / Sand Blasted BED



TDS-C302-8FOV/ISO-M
TDS-RC302-8FOV/ISO-R

MATERIAL	Die-Casting Alloy
BARBORE	ø31.8
EXT	75 90 105
RISE	±10°
HEIGHT	41
FINISH	Black / Matte Black



TDS-C340-8/FOV/ISO-M

MATERIAL	Die-Casting Alloy
BARBORE	ø31.8 ø25.4
SPEC	(ø25.4) 15° / E: 60 75 90 105 120 25° / E: 90 105 120 (ø31.8) 15° / E: 70 90 105 120
HEIGHT	41
FINISH	BED / Sand Blasted BED

MY2020 Zoom Catalog Landscape - V15.indd 28-29
2018/9/18 09:10

E-TREKKING

POWER, ADJUSTABILITY, VERSATILITY

An adjustable stem engineered specifically for precise steering and predictable handling of E-bikes. The square section is designed to withstand the added forces imparted by heavier, more powerful electric drivetrains. Features SHIMANO and STEPS inner cable routing.





TDS-D616-8FOV/ISO-M

MATERIAL	3D Forged Alloy
BARBORE	ø31.8
EXT	75 90 105
RISE	0°~90°
HEIGHT	40
FINISH	Sand Blasted Anodized Black or Silver









▸PATENT MTS-AL-476-5SUS/ISO-C

MATERIAL	Forge Alloy / SUS
BARBORE	ø25.4
EXT	110
RISE	0°~60°
LENGTH	180 230
FINISH	High Polished Silver / HP

▸PATENT MTS-AL-476-5/ISO-C

MATERIAL	Forged alloy
BARBORE	ø25.4
EXT	110
RISE	0°~60°
LENGTH	150 180
FINISH	High Polished Anodized Black or Silver

▸PATENT TDS-AL-306-8/ISO-C

MATERIAL	Forged alloy
BARBORE	ø25.4
EXT	110
RISE	0°~60°
LENGTH	37
FINISH	High Polished Anodized Black or Silver

MY2020 Zoom Catalog Landscape - V15.indd 30-31
2018/9/18 09:10



▸PATENT

TDS-C533-8/ EN15194

MATERIAL	Die-Casting Forged
BARBORE	ø25.4
EXT	115
RISE	0°~90°
HEIGHT	41
FINISH	Silver or BED



▸PATENT

TDS-D299N-8/FOV/ EN15194

MATERIAL	3D Forged Alloy
BARBORE	ø31.8 ø25.4
EXT	75 105 125
RISE	0~60°
HEIGHT	41
FINISH	Sand Blasted Black or Silver



TDS-C269-8/FOV/ EN15194

MATERIAL	Die-Casting Alloy
BARBORE	ø31.8 ø25.4
EXT	90 110
RISE	0°~90°
HEIGHT	41
FINISH	BED / High Polished Silver



▸PATENT

MTS-C533-5/ EN15194

MATERIAL	Forged/Die-Casting
BARBORE	ø25.4
EXT	115
RISE	0°~90°
LENGTH	150 180
FINISH	Silver or BED



▸PATENT

MTS-D367N-2/5/FOV/ EN15194

MATERIAL	3D Forged Alloy
BARBORE	ø31.8 ø25.4
EXT	60 90 110
RISE	0~60°
LENGTH	150 180
FINISH	Sand Blasted Black or Silver



MTS-C269-5/FOV/ EN15194

MATERIAL	Die-Casting Alloy
BARBORE	ø31.8 ø25.4
EXT	90 110
RISE	0°~90°
LENGTH	180
FINISH	BED / High Polished Silver



TDS-C272-8/EN15194

MATERIAL	Die-Casting Alloy
BARBORE	ø25.4
EXT	105 125
RISE	-10°~50°
LENGTH	41mm
FINISH	BED / High Polished Silver



TDS-C297-8/ISO-C

MATERIAL	Die-Casting Alloy
BARBORE	ø25.4
EXT	105 125
RISE	-10°~+50°
HEIGHT	41
FINISH	BED / High Polished Silver



TDS-C331-8/ISO-C

MATERIAL	Die-Casting Alloy
BARBORE	ø25.4
EXT	105 125
RISE	-10°~+50°
HEIGHT	41
FINISH	BED / High Polished Silver





MTS-C272-5/EN15194

MATERIAL	Die-Casting Alloy
BARBORE	ø25.4
EXT	90 110
RISE	-10°~50°
LENGTH	150 180mm
FINISH	BED / High Polished Silver



MTS-C297-2/5/ISO-C

MATERIAL	Die-Casting Alloy
BARBORE	ø25.4
EXT	90 110
RISE	-10°~+50°
LENGTH	150 180
FINISH	BED / High Polished Silver



MTS-C331-2/5 /ISO-C

MATERIAL	Die-Casting Alloy
BARBORE	ø25.4
EXT	90 110
RISE	-10°~+50°
LENGTH	150 180
FINISH	BED / High Polished Silver

MY2020 Zoom Catalog Landscape - V15.indd 32-33
2018/9/18 09:11

E-CITY



TDS-D617-8FOV/EN15194

MATERIAL	3D Forged Alloy
BARBORE	ø31.8
EXT	60
RISE	30°
HEIGHT	61mm
FINISH	Sand Blasted Anodized Black



TDS-D625-8FOV/EN15194

MATERIAL	3D Forged Alloy
BARBORE	ø31.8
EXT	60
RISE	30°
HEIGHT	60mm
FINISH	Sand Blasted Anodized Black



TDS-C614-5/ISO-C

MATERIAL	Die-Casting Alloy
BARBORE	ø25.4
EXT	40
RISE	30°
LENGTH	62mm
FINISH	Black High Polished Silver



HS-C398-2/5/ISO-C

MATERIAL	Die-Casting Alloy
BARBORE	ø25.4
EXT	90
RISE	35°
LENGTH	150 180
FINISH	BED / High Polished Silver



HA-C40-2/5/ISO-C
HA-C40-2/5SUS/ISO-C
HA-C60-2/5/ISO-C
HA-C80-2/5/ISO-C

MATERIAL	Die-Casting Alloy / Steel or SUS
BARBORE	ø25.4
EXT	40(C40) / 60(C60) / 80(C80)
RISE	30°
LENGTH	(C40) 150 180 220 (C60 / c80) 150 180
FINISH	BED / BED High Polished Silver / CP



HS-C40-2/ISO-C
HS-C60-2/ISO-C
HS-C80-2/5ISO-C

MATERIAL	Die-Casting Alloy
BARBORE	ø25.4
EXT	40(C40) / 60(C60) / 80 100(C80)
RISE	30°
LENGTH	150 180
FINISH	BED / High Polished Silver



HA-C39-2/5/ISO-C

MATERIAL	Die-Casting Alloy / Steel
BARBORE	ø25.4
EXT	40
RISE	20°
LENGTH	150 180
FINISH	BED / BED High Polished Silver / CP



HE-C80D-2/ISO-C

MATERIAL	Die-Casting Alloy
BARBORE	ø25.4
EXT	80 100
RISE	-17°
LENGTH	150
FINISH	High Polished Silver

MY2020 Zoom Catalog Landscape - V15.indd 34-35
2018/9/18 09:11



MX-625-5-8/ISO-M

MATERIAL	Forged Alloy
BARBORE	ø22.2
EXT	48
HEIGHT	30
FINISH	Sand Blasted Anodized Black or Silver



MX-628-8/ISO-M

MATERIAL	Forged Alloy
BARBORE	ø22.2
EXT	48
HEIGHT	30
FINISH	Sand Blasted Anodized Black or Silver



MX-C631-8/ISO-M

MATERIAL	Die-Casting Alloy
BARBORE	ø22.2
EXT	50
HEIGHT	30
FINISH	BED



MX-C636-8/ISO-M

MATERIAL	Die-Casting Alloy
BARBORE	ø22.2
EXT	50mm
HEIGHT	30mm
QUILL DIAMETER	ø28.6
FINISH	BED



MX-413-5/8/ISO-M

MATERIAL	Alloy
BARBORE	ø22.2
EXT	48
HEIGHT	30
FINISH	Barreled Anodized Black or Silver



MX-C784-2/ISO-K
MXC784-2FS

MATERIAL	Die-Casting Alloy / Steel
BARBORE	ø22.2
EXT	32mm
RISE	145
HEIGHT	BED/BED Barreled Silver/ CP

►PATENT

FB-D308NLB-8/ISO-C
FB-D308NRB-8/ISO-C

MATERIAL	3D Forged Alloy
BARBORE	ø25.4
EXT	0
RISE	6°
UPPER STEM	313-350 / 313-435
LOWER	30
FINISH	Sand Blasted Anodized Black or Silver



►PATENT

FB-D308NLB-2/5/ISO-C
FB-D308NRB-2/5/ISO-C

MATERIAL	3D Forged Alloy
BARBORE	ø25.4
EXT	0
RISE	0° 10°
UPPER STEM	313-350 / 313-435
LOWER	105
FINISH	Sand Blasted Anodized Black or Silver



►PATENT

FB-AL-139LB-2/5/ISO-C
FB-AL-139RB-2/5/ISO-C

MATERIAL	Die-Casting Alloy / Alloy
BARBORE	ø25.4
EXT	40 60
RISE	30°
LENGTH	350 390 460
UPPER STEM	210 250 320
LOWER	110
FINISH	High Polished Silver



►PATENT

FB-120LB-5/ISO-C
FB-120RB-5/ISO-C
FB-AL-120LB-5/ISO-C
FB-AL-120RB-5/ISO-C

MATERIAL	Die-Casting Alloy / Steel
BARBORE	ø25.4
EXT	40
RISE	30°
LENGTH	350 400 450
UPPER STEM	216 266 316
LOWER	110
FINISH	BED/BED High Polished Silver / CP



MY2020 Zoom Catalog Landscape - V15.indd 36-37
2018/9/18 09:12



HANDLE BARS

ROAD

BEND	ITEM NO.	DROP	REACH	WIDTH					BARBORE		
COMPACT	DR-AL-199BT FOV/ISO-R	124 128	77	380	400	420	440		○	● 31.8	○
	DR-AL-302BTFOV/ISO-R	124	80	360	380	400	420	440	○	● 31.8	○
	DR-AL-312BTFOV/ISO-R	124	80	380	400	420	440		○	● 31.8	○
	DR-AL-195BTFOV/ISO-R	128	77	380	440	420	440		○	● 31.8	○
	DR-AL-210BT/FOV/ISO-R	124	80	360	380	400	420	440	○	● 31.8	○
	DR-AL-211BT FOV/ISO-R	124	85	450	470	490	510		○	● 31.8	○
	DR-AL-311BTFOV/ISO-R	118	85	380	400	420	440		○	● 31.8	○
	DR-AL-194BT FOV/ISO-R	125	80	400	420	440			○	● 31.8	○
CLASSIC	DR-123/ISO-R	138	100	380	400	420	440		● 25.4	○	○
	DR-AL-123BT/ISO-R	138	100	380	400	420	440		● 25.4	● 31.8	○
	DR-AL-130	165	105	380	400	420	440		● 25.4	○	○
AERO	DR-AL-149BT FOV/ISO-C	X	174	400	420	440			○	● 31.8	○
BULL HORN	DR-AL-197FOV/ISO-C	X	X	390	410	430	450		○	● 31.8	○

MTB

RISE(MM)	ITEM NO.	WIDTH	BACK SWEEP	BARBORE		
±5	MTB-AL-300BT FOV/ISO-M	580 600 620 640 660 680 700 720 740 760 780	6° 9°	○	● 31.8	○
	MTB-AL-3500BT/ISO-M	720 740 760 780 800	6° 9°	○	○	● 35
0	MTB-AL-110BT/FOV/ISO-M	ø25.4 540 560 580 600 620 ø31.8 560 580 600 620 640 660 680	6° 9° 15°	● 25.4	● 31.8	○
	MTB-110PP/ISO-M	ø25.4 540 560 580 600 620	6° 10° 15°	● 25.4	○	○
12	MTB-AL-312BT FOV/ISO-M	580 600 620 640 660 680 700 720 740 760 780	6° 9°	○	● 31.8	○
	MTB-AL-3512BT/ISO-M	720 740 760 780 800	6° 9°	○	○	● 35
20	MTB-AL-320BT FOV/ISO-M	580 600 620 640 660 680 700 720 740 760 780	6° 9° 15°	○	● 31.8	○
	MTB-AL-3520BT/ISO-M	720 740 760 780 800	6° 9°	○	○	● 35
	MTB-AL-152/BT/ISO-M	560 580 600 620	6° 10° 15°	● 25.4	○	○
25	MTB-AL-325BT FOV/ISO-M	580 600 620 640 660 680 700 720	6° 9°	○	● 31.8	○
30	MTB-AL-330BT FOV/ISO-M	580 600 620 640 660 680 700	6° 9° 15°	○	● 31.8	○
	MTB-AL-153/BT/ISO-M	560 580 600 620	6° 10° 15	● 25.4	○	○
40	MTB-154/TP/ISO-C/ISO-M	560 580 600 620	6° 10° 15	● 25.4	○	○
45	MTB-AL-345BT FOV/ISO-M	580 600 620 640 660 680 700	6° 9°	○	● 31.8	○
50	MTB- 155/TP/ISO-C	560 580 600 620	6° 10° 15°	● 25.4	○	○
60	MTB-156/TP/ISO-C	560 580 600 620 640 660	6° 10° 15°	● 25.4	○	○
100	MTB-158/TP/ISO-C	560 580 600 620 640	10° 15°	● 25.4	○	○

TREKKING

RISE(MM)	ITEM NO.	WIDTH	BACK SWEEP	BARBORE		
0	ARC-540/ISO-C	560 580 600 620 640 660	27° 23°	○	● 25.4	● 31.8
26	NR-16/ISO-C	590 610	33°	○	● 25.4	○
38	NR-AL-124FOV/ISO-C	620	38°	○	○	● 31.8
66	NR-14/ISO-C	570 595 610	44°	○	● 25.4	○
70	MTB-181/ISO-C	560 580 600	X	○	● 25.4	○
75	TR-28/ISO-C	540 560 580 600 620 640	50°	○	● 25.4	○
80	NR-21/ISO-C	500 540	70°	○	● 25.4	○
88	MX-AL-470	400 420 440	10°	● 22.2	○	○
115	SU-TYPE/ISO-C	460(65°) 500(63°) 600(56°)	65° 63° 56°	○	● 25.4	○
	MX-12ES/ISO-C	460 480 500 520 540	45°	● 22.2	● 25.4	○
135	BH-21/S/ISO-C	635 650 700	55°	○	● 25.4	○
160	MX- 317/ISO-M	620 670	6°	● 22.2	○	○


MY2020 Zoom Catalog Landscape - V15.indd 38-39
2018/9/18 09:12

FLANDERS

A MONUMENTAL CLASSIC

One of the hallowed Monuments that marks the Spring Classics, FLANDERS neo-classical road bars are stiff, yet with an ideal amount of engineered compliance for precise handling and vibration release.





DR-AL-E199BT
Compatible with SHIMANO Di2 Junction A



1. Wider Barbore, easy to equip Stem, Computer Mount, Clip on aero bar, Light and so on.
2. 34 x 28.6mm Bigger Oval Upper offers 60% more area to support rider's palms
3. 6°Back Sweep upper easy to maintain aero riding position
4. Maximum upper width offers wider holding contacts
5. 3°degree flare for better balance and chest breath
6. Dual Drops follow 4 widths to catch better lower position
7. Extended lower easy to rock at spinning

►PATENT

DR-AL-199BT FOV/ISO-R
DR-AL-E199BT FOV/ISO-R

MATERIAL	Alloy Butted
BARBORE	ø31.8mm
WIDTH	380 400 420 440 460mm
DROP	124 (380mm/400mm) 128 (420mm/440mm)
FINISH	Sand Blasted Anodized Black or Silver

DR-AL-302BT FOV/ISO-R
DR-AL-E302BT FOV/ISO-R

MATERIAL	Alloy Butted
BARBORE	ø31.8mm
WIDTH	380 400 420 440mm
REACH	80mm
DROP	124mm
FINISH	Sand Blasted Anodized Black or Silver



DR-AL-312BT FOV/ISO-R
DR-AL-E312BT FOV/ISO-R

MATERIAL	Alloy Butted
BARBORE	ø31.8mm
WIDTH	380 400 420 440mm
REACH	80mm
OUTSWEEP	16°
DROP	124mm
FINISH	Sand Blasted Anodized Black or Silver



DR-AL-195BT FOV/ISO-R
DR-AL-E195BT FOV/ISO-R

MATERIAL	Alloy Butted
BARBORE	ø31.8mm
WIDTH	380 400 420 440mm
REACH	77mm
DROP	128mm
FINISH	Sand Blasted Anodized Black or Silver



MY2020 Zoom Catalog Landscape - V15.indd 40-41
2018/9/18 09:12



DR-AL-210B
DR-AL-210B BT/ISO-R
DR-AL-210BT FOV/ISO-R

MATERIAL	Alloy or Alloy Butted
BARBORE	ø25.4 ø31.8mm
WIDTH	340 360 380 400 440 460mm
REACH	80mm
DROP	124mm
FINISH	Sand Blasted Anodized Black or Silver



DR-AL-211BT FOV/ISO-R

MATERIAL	Alloy or Alloy Butted
BARBORE	ø31.8mm
WIDTH	380 400 420 440mm
FLARE	16°
DROP	124mm
FINISH	Sand Blasted Anodized Black or Silver



DR-AL-311BT FOV/ISO-R

MATERIAL	Alloy Butted
DIAMETER	ø31.8mm
WIDTH	380 400 420 440mm
FLARE	25°
REACH	85mm
DROP	118mm
FINISH	Sand Blasted Anodized Black or Silver



DR-123/ISO-R
DR-AL-123B
DR-AL-123B BT/ISO-R
DR-AL-123B FOV
DR-AL-123B BT FOV/ISO-R

MATERIAL	Steel or Alloy or Alloy Butted
BARBORE	ø25.4 ø31.8mm
WIDTH	380 400 420 440mm
REACH	130mm
DROP	138mm
FINISH	(ST) CP BED (AL) Sand Blasted Anodized Black or Silver

DR-AL-130

MATERIAL	Alloy
BARBORE	ø25.4mm
WIDTH	380 400 420 440mm
REACH	115mm
DROP	165mm
FINISH	Sand Blasted Anodized Black or Silver



DR-AL-149BT FOV/ISO-R

MATERIAL	Alloy Butted
BARBORE	ø31.8mm
WIDTH	400 420 440 460mm
FINISH	Sand Blasted Anodized Black or Silver



DR-AL-197FOV/ISO-C

MATERIAL	AL6061
BARBORE	ø31.8mm
WIDTH	410 430 450mm
FINISH	High Polished Anodized Black or Silver



MY2020 Zoom Catalog Landscape - V15.indd 42-43
2018/9/18 09:12

TEQUILA SERIES 35MM



MTB-AL-3500BT/ISO-M

MATERIAL	Alloy Butted
BARBORE	ø35mm
WIDTH	720 740 760 780 800mm
BACK SWEEP	6° 9°
RISE	+5mm
FINISH	Sand Blasted Anodized Color



MTB-AL-3512BT/ISO-M

MATERIAL	Alloy Butted
BARBORE	ø35mm
WIDTH	720 740 760 780 800mm
BACK SWEEP	6° 9°
UP SWEEP	4°
RISE	12mm
FINISH	Sand Blasted Anodized Color



MTB-AL-3520BT/ISO-M

MATERIAL	Alloy Butted
BARBORE	ø35mm
WIDTH	720 740 760 780 800mm
BACK SWEEP	6° 9°
UP SWEEP	3°
RISE	20mm
FINISH	Sand Blasted Anodized Color

MTB-AL-3700BT/ISO-M/DIN+(M)
MTB-AL-E3700BT/ISO-M/DIN+(M)

MATERIAL	Alloy Butted
BARBORE	ø35mm
WIDTH	720 740 760 780 800mm
BACK SWEEP	6° 9°
RISE	+5mm
FINISH	Sand Blasted Anodized Color



MTB-AL-E3700BT
Compatible with Shimano Di2 and STePS junction boxes

MTB-AL-3712BT/ISO-M/DIN+(M)
MTB-AL-E3712BT/ISO-M/DIN+(M)

MATERIAL	Alloy Butted
BARBORE	ø35mm
WIDTH	720 740 760 780 800mm
BACK SWEEP	6° 9°
UP SWEEP	4°
RISE	12mm
FINISH	Sand Blasted Anodized Color



MTB-AL-3720BT/ISO-M/DIN+(M)
MTB-AL-E3720BT/ISO-M/DIN+(M)

MATERIAL	Alloy Butted
BARBORE	ø35mm
WIDTH	720 740 760 780 800mm
BACK SWEEP	6° 9°
UP SWEEP	3°
RISE	20mm
FINISH	Sand Blasted Anodized Color





MY2020 Zoom Catalog Landscape - V15.indd 44-45
2018/9/18 09:13



MTB-AL-300BT FOV/ISO-M



MTB-AL-312BT FOV/ISO-M



MTB-AL-320BT FOV/ISO-M

	MTB-AL-300BT FOV/ISO-M	MTB-AL-312BT FOV/ISO-M	MTB-AL-320BT FOV/ISO-M
MATERIAL	Alloy Butted	Alloy Butted	Alloy Butted
BARBORE	ø31.8mm	ø31.8mm	ø31.8mm
WIDTH	580 600 620 640 660 680 700 720 740 760 780mm	580 600 620 640 660 680 700 720 740 760 780mm	580 600 620 640 660 680 700 720 740 760 780mm
BACK SWEEP	6° 9°	6° 9°	6° 10° 15°
UP SWEEP	--	4°	3°
RISE	±5mm	12	20
FINISH	Sand Blasted Anodized Black or Silver		



MTB-AL-E320BT
Compatible with SHIMANO Di2 &
STEPS inner cable routing

MTB-AL-E320BT FOV/ISO-M	
MATERIAL	Alloy Butted
BARBORE	ø31.8mm
WIDTH	720mm
BACK SWEEP	9°
RISE	20mm
FINISH	Sand Blasted Anodized Black or Silver



MTB-110PP/ISO-M
MTB-AL-110BT/ISO-M

MTB-110FOV/ISO-M
MTB-AL-110FOV/ISO-C

MTB-AL-110PP/ISO-C
MTB-AL-110BT FOV/ISO-M

MATERIAL	Steel or Alloy or Alloy Butted
BARBORE	ø25.4 ø31.8mm
WIDTH	(ø25.4): 540 560 580 600 620 (ø31.8): 560 580 600 620 640 660 680mm
BACK SWEEP	(ø25.4): 6° 10° 15° (ø31.8): 6° 10° 15°
FINISH	(ST) CP BED (AL) Sand Blasted Anodized Black or Silver



MTB-AL-325BT FOV/ISO-M



MTB-AL-330BT FOV/ISO-M



MTB-AL-345BT FOV/ISO-M

	MTB-AL-325BT FOV/ISO-M	MTB-AL-330BT FOV/ISO-M	MTB-AL-345BT FOV/ISO-M
MATERIAL	Alloy Butted	Alloy Butted	Alloy Butted
BARBORE	ø31.8mm	ø31.8mm	ø31.8mm
WIDTH	560 580 600 620 640 680 700 720mm	560 580 600 620 640 680 700 720 740 760 780mm	520 540 560 580 600 620 640 680 700mm
BACK SWEEP	6° 9°	6° 9° 15°	6° 9°
UP SWEEP	6°	5°	6°
RISE	25mm	30mm	45mm
FINISH	Sand Blasted Anodized Black or Silver	Sand Blasted Anodized Black or Silver	Sand Blasted Anodized Black or Silver

MY2020 Zoom Catalog Landscape - V15.indd 46-47 2018/9/18 09:13



MTB-152TP/ISO-C
MTB-AL-152TP/ISO-C
MTB-AL-152BT/ISO-M

MTB-153TP/ISO-M
MTB-AL-153TP/ISO-C
MTB-AL-153BT/ISO-M

MTB-154TP/ISO-M
MTB-AL-154TP/ISO-C
MTB-AL-154BT/ISO-M

MATERIAL	Steel or Alloy or Alloy Butted	Steel or Alloy or Alloy Butted	Steel or Alloy or Alloy Butted
BARBORE	ø25.4mm	ø25.4mm	ø25.4mm
WIDTH	560 580 600 620mm	560 580 600 620mm	560 580 600 620mm
BACK SWEEP	6° 10° 15°	6° 10° 15°	6° 10° 15°
RISE	20mm	30mm	40mm
FINISH	(ST) CP BED D.SF (AL) Sand Blasted Anodized Black or Silver	(ST) CP BED D.SF (AL) Sand Blasted Anodized Black or Silver	(ST) CP BED D.SF (AL) Sand Blasted Anodized Black or Silver

MTB-155TP/ISO-M
MTB-AL-155TP/ISO-C

MTB-156TP/ISO-C
MTB-AL-156TP/ISO-C

MTB-158TP/ISO-C
MTB-AL-158TP/ISO-C

MATERIAL	Steel or Alloy		
BARBORE	ø25.4mm		
WIDTH	560 580 600 620mm	560 580 600 620 640mm	560 580 600 620 640mm
BACK SWEEP	6° 10° 15°	6° 10° 15°	10° 15°
RISE	50mm	60mm	100mm
FINISH	(ST) CP BED (AL) Sand Blasted Anodized Black or Silver	(ST) CP BED (AL) Sand Blasted Anodized Black or Silver	(ST) CP BED (AL) Sand Blasted Anodized Black or Silver





NR-AL-124BT FOV/EN15194
NR-AL-E124BT FOV/EN15194

MATERIAL	Alloy
BARBORE	ø31.8
WIDTH	600 620 640 660 680 700mm
BACK SWEEP	38°
RISE	21 38mm
FINISH	Sand Blasted Anodized Black or Silver



ARC-540/ISO-C
ARC-AL-540/FOV/EN15194

MATERIAL	Steel or Alloy
BARBORE	ø25.4 ø31.8
WIDTH	560 580 600 620 640 660mm
BACK SWEEP	27°(ø25.4) 23°(ø31.8)
FINISH	(ST) CP BED (AL) High Polished Anodized Black or Silver



NR-AL-196BT FOV/EN15194

MATERIAL	Alloy or butted
BARBORE	ø31.8
WIDTH	600 620 660 700mm
BACK SWEEP	18°
RISE	25mm
FINISH	Sand Blasted Anodized Black or Silver



NR-21/ISO-C
NR-AL-21/ISO-C

MATERIAL	Steel or Alloy
BARBORE	ø25.4
WIDTH	500 540mm
BACK SWEEP	70°
RISE	80mm
FINISH	(ST) CP BED D.SF (AL) High Polished Anodized Black or Silver

MY2020 Zoom Catalog Landscape - V15.indd 48-49
2018/9/18 09:13



TR-28/ISO-C
TR-AL-28/ISO-C

MATERIAL	Steel or Alloy
BARBORE	ø25.4
WIDTH	540 560 580 600 620 640
BACK SWEEP	50°
RISE	75
FINISH	(ST) CP BED (AL) High Polished Anodized Black or Silver



NR-14/ISO-C
NR-AL-14/ISO-C

MATERIAL	Steel or Alloy
BARBORE	ø25.4
WIDTH	570 595 610
BACK SWEEP	44°
RISE	66
FINISH	(ST) CP BED (AL) High Polished Anodized Black or Silver



NR-16/ISO-C
NR-AL-16/ISO-C

MATERIAL	Steel or Alloy
BARBORE	ø25.4
WIDTH	590 610
BACK SWEEP	33°
RISE	26
FINISH	(ST) CP BED (AL) High Polished Anodized Black or Silver





BH-226/ISO-C
BH-SUS-226/ISO-C

MATERIAL	Steel or CRMO
BARBORE	ø25.4
WIDTH	460 490 530 560
BACK SWEEP	56°
RISE	60mm
FINISH	(ST) CP BED



MX-317/ISO-M
MX-CR-317/ISO-M

MATERIAL	Steel or CRMO
BARBORE	ø22.2
WIDTH	620 670
BACK SWEEP	6°
UP SWEEP	3°
RISE	160
FINISH	(ST) CP BED



BH-21/ISO-C
BH-AL-21/ISO-C

MATERIAL	Steel or Alloy
BARBORE	ø25.4
WIDTH	635 650 700
BACK SWEEP	55°
RISE	135
FINISH	(ST) CP BED (AL) High Polished Anodized Black or Silver



MX-AL-470/EN-14765

MATERIAL	Alloy
BARBORE	ø22.2
WIDTH	400 420 440
BACK SWEEP	10°
UP SWEEP	5°
RISE	88
FINISH	Sand Blasted Anodized Black or Silver

MY2020 Zoom Catalog Landscape - V15.indd 50-51
2018/9/18 09:14

SEATPOSTS





SPD-801/ISO-M

MATERIAL	7050 Alloy
TRAVEL	80 100
LENGTH	335mm (Travel 80mm) 375mm (Travel 100mm)
CABLE ROUTING	Internal Routing
CABLE LENGTH	1500
DIAMETER	ø30.9 ø31.6
OFF SET	0
FINISH	Sand Blasted Anodized Black



SPD-500/ISO-R

MATERIAL	7075 Alloy
TRAVEL	60 80
LENGTH	300
DIAMETER	ø27.2
OFF SET	12
FINISH	Sand Blasted Anodized Black



SPD-801E/ISO-M

MATERIAL	7050 Alloy
TRAVEL	80 100
LENGTH	345mm (Travel 80mm) 385mm (Travel 100mm)
CABLE ROUTING	External Routing
CABLE LENGTH	1500
DIAMETER	ø30.9 ø31.6
OFF SET	0
FINISH	Sand Blasted Anodized Black



SPD-602/ISO-C

MATERIAL	6061 Alloy
TRAVEL	100mm
LENGTH	375mm
DIAMETER	ø30.4 ø30.9 ø31.6
OFF SET	18
FINISH	Sand Blasted Anodized Black or Sliver

MY2020 Zoom Catalog Landscape - V15.indd 52-53
2018/9/18 09:14



SP-297NACF/ISO-M

MATERIAL	Forged Alloy / Carbon or UD Carbon
DIAMETER	ø27.2 ø31.6
OFF SET	12
LENGTH	(ø27.2) 300 350 (ø31.6) 300 350 400
FINISH	BK / MCF GCF

SP-D297N/ISO-M


MATERIAL	3D Forged Alloy (one-piece)
DIAMETER	ø27.2 ø30.9 ø31.6
OFF SET	12
LENGTH	300 350 400
FINISH	Barreled /Anodized Black or Silver

SP-297N/ISO-M

MATERIAL	Forged Alloy / Alloy
DIAMETER	ø27.2 ø28.6 ø30.4 ø30.9 ø31.6
OFF SET	12
LENGTH	300 350 400
FINISH	Barreled /Anodized Black or Silver








SP-327/ISO-R

MATERIAL	Forged Alloy / Alloy
DIAMETER	ø27.2 ø31.6
OFF SET	5 25
LENGTH	300 350 400mm
FINISH	Barreled /Anodized Black or Silver

SP-327ACF/ISO-R

MATERIAL	Forged Alloy / Carbon or UD Carbon
DIAMETER	ø27.2 ø31.6
OFF SET	5 25
LENGTH	(ø31.6) 300 350 400mm (ø27.2) 300 350mm
FINISH	BK / MCF GCF

MY2020 Zoom Catalog Landscape - V15.indd 54-55
2018/9/18 09:14

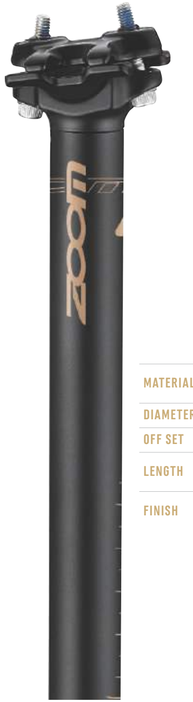

SP-406ACF/ISO-M

MATERIAL	Forged Alloy / Carbon or UD Carbon
DIAMETER	ø27.2 ø31.6
OFF SET	0
LENGTH	(ø27.2) 300 350 (ø31.6) 300 350 400
FINISH	BK / MCF GCF

SP-406/ISO-M

MATERIAL	Forged Alloy / Alloy
DIAMETER	ø27.2 ø30.9 ø31.6
OFF SET	0
LENGTH	300 350 400
FINISH	Barreled /Anodized Black or Silver



SP-219NACF/ISO-M

MATERIAL	Forged Alloy / Carbon or UD Carbon
DIAMETER	ø27.2 ø31.6
OFF SET	16
LENGTH	(ø27.2) 300 350 (ø31.6) 300 350 400
FINISH	BK / MCF GCF

SP-219N/ISO-M

MATERIAL	Forged Alloy / Alloy
DIAMETER	ø27.2 ø30.9 ø31.6
OFF SET	16
LENGTH	300 350 400
FINISH	Barreled /Anodized Black or Silver



SP-D292/ISO-R/M

MATERIAL	3D Forged Alloy (one-piece)
DIAMETER	(ISO-M)ø27.2 ø30.9 ø31.6 (ISO-R)ø31.6
OFF SET	16
LENGTH	250 300 350 400
FINISH	Barreled /Anodized Black or Silver



SP-C261/ISO-M

MATERIAL	Die-Casting Alloy / Alloy
DIAMETER	ø27.2 ø30.9 ø31.6
OFF SET	0
LENGTH	300 350 400
FINISH	Barreled /Anodized Black or Silver



SP-218/ISO-M

MATERIAL	Forged Alloy / Alloy
DIAMETER	ø27.2 ø30.9 ø31.6
OFF SET	9
LENGTH	300 350 400
FINISH	Barreled /Anodized Black or Silver



SP-C255/ISO-M

MATERIAL	Die-Casting Alloy / Alloy
DIAMETER	ø27.2 ø30.9 ø31.6
OFF SET	15
LENGTH	300 350 400
FINISH	Barreled /Anodized Black or Silver

MY2020 Zoom Catalog Landscape - V15.indd 56-57
2018/9/18 09:14



SP-C208/ISO-M

SP-C207/ISO-M

MATERIAL	Die-Casting Alloy / Alloy
DIAMETER	ø25.4 ø25.6 ø26 ø26.6 ø26.8 ø27 ø27.2 ø28.6 ø29.2 ø29.8 ø30.0 ø30.2 ø30.4 ø30.6 ø30.9 ø31.2 ø31.6 ø31.8
OFF SET	16
LENGTH	200 230 250 300 350 400
FINISH	Barreled /Anodized Black or Silver

SP-C208/ISO-M

MATERIAL	Steel / Die-Casting Alloy / Alloy
DIAMETER	ø25.4 ø25.6 ø26 ø26.6 ø26.8 ø27 ø27.2 ø28.6 ø29.2 ø29.8 ø30.0 ø30.2 ø30.4 ø30.6 ø30.9 ø31.2 ø31.6 ø31.8
OFF SET	17.5
LENGTH	200 230 250 300 350 400
FINISH	Barreled /Anodized Black or Silver





SP-216/ISO-M

MATERIAL	Forged Alloy / Alloy
DIAMETER	ø25.4 ø25.6 ø27.2 ø28.6 ø30.4 ø30.9 ø31.6
OFF SET	22
LENGTH	300 350 400
FINISH	Barreled /Anodized Black or Silver

SP-C212/ISO-M

MATERIAL	Die-Casting Alloy / Alloy
DIAMETER	
OFF SET	12.9
LENGTH	
FINISH	Barreled /Anodized Black or Silver



SP-90/ISO-M

MATERIAL	Die-Casting Alloy / Alloy
DIAMETER	ø30.4 ø30.9 ø31.6 ø34
OFF SET	22
LENGTH	300 350 400 450 (ø34) / 500 550 (ISO-M) / 300 350 400
FINISH	Barreled /Anodized Black or Silver



SP-181/ISO-M
SP-AL-181/ISO-M

MATERIAL	Forged Alloy / Steel Forged Alloy / Alloy
DIAMETER	(ST) / ø25.4 ø27.2 ø28.6 (AL) / ø25.4 ø25.6 ø26.8 ø27.2 ø28.6 ø30.4 ø30.9 ø31.6
OFF SET	0
LENGTH	200 250 300 350
FINISH	(ST) Barreled Anodized Black / BED (AL) Barreled Anodized Black / Anodized Black



SP-102/ISO-M

MATERIAL	Alloy
DIAMETER	ø25.4 ø25.6 ø26.8 ø27.2 ø28.6 ø30.4 ø30.9 ø31.6 ø34
LENGTH	(ø34) / 500 550 580 (ISO-M) / 200 230 250 300 350
FINISH	Anodized Black or Silver (ø34) Sand Blasted Black or Silver

MY2020 Zoom Catalog Landscape - V15.indd 58-59
2018/9/18 09:15



SPS-405/ISO-C

MATERIAL	Forged Alloy / Alloy
DIAMETER	ø27.2 ø31.6
OFF SET	14
LENGTH	300 350
FINISH	Barreled / Anodized Black or Silver



SPS-327/ISO-C

MATERIAL	Forged Alloy / Alloy
DIAMETER	ø27.2 ø31.6
OFF SET	5 25
LENGTH	300 350
FINISH	Barreled / Anodized Black or Silver



SPS-C255/ISO-C

MATERIAL	Die-Casting Alloy / Alloy
DIAMETER	ø27.2 ø30.9 ø31.6
OFF SET	8
LENGTH	355
FINISH	Barreled /Anodized Black or Silver



SPS-C372/ISO-C

MATERIAL	Die-Casting Alloy/Alloy
DIAMETER	ø25.4 ø25.6 ø26.6 ø26.8 ø27.2 ø28.6 ø30.9 ø31.6
OFF SET	17
LENGTH	300 350
FINISH	Barreled Silver or BED / Anodized Silver



SPS-C373/ISO-C

MATERIAL	Die-Casting Alloy/Alloy
DIAMETER	ø25.4 ø25.6 ø26.6 ø26.8 ø27.2 ø28.6 ø30.9 ø31.6
OFF SET	18
LENGTH	300 350
FINISH	BED / Anodized Black



SPS-78N/ISO-C

MATERIAL	Steel/alloy
DIAMETER	ø25.4 ø25.6 ø26.6 ø26.8 ø27.2 ø28.6 ø30.9 ø31.6
LENGTH	260 300 350
FINISH	Anodized Black or Silver



BAR ENDS



	MT-35A	MT-35AN
MATERIAL	3D Forged Alloy	3d forged alloy
BARBORE	ø22.2	ø22.2
LENGTH	115 98	98
FINISH	Painted YS Black / White	Painted YS bk / white



	MT-32AS
MATERIAL	3D Forged Alloy
BARBORE	ø22.2
DIAMETER	ø22.2
LENGTH	67 95 105
FINISH	Sand Blasted Black or Silver



	MT-C03A	MT-30A
MATERIAL	Die-Casting Alloy/Alloy	3D Forged Alloy
BARBORE	ø22.2	ø22.2
DIAMETER	ø22.2	ø22.2
LENGTH	87	60
FINISH	BED / High Polished Black	Sand Blasted Anodized Black or Silver



	MT-C05
MATERIAL	Die-Casting Alloy/Alloy
BARBORE	ø22.2
DIAMETER	--
LENGTH	90
FINISH	BED / High Polished Silver



	MT-90A
MATERIAL	3D Forged Alloy
BARBORE	ø22.2
DIAMETER	--
LENGTH	95 104
FINISH	Sand Blasted Anodized Black or Silver



	MT-27ST MT- A27
MATERIAL	Steel or Alloy
BARBORE	ø22.2
DIAMETER	(ST):31.4x25.4 (AL):32x25
LENGTH	(ST): 60 80 90 100 110 (AL): 80 100 110 120 130
FINISH	(ST) CP BED D.SF (AL) Sand Blasted Anodized Black or Silver

MY2020 Zoom Catalog Landscape - V15.indd 62-63
2018/9/18 09:15

SEAT CLAMPS/ PEDALS



PD-04-4SK

MATERIAL	Steel
DIAMETER	ø38
LENGTH	110
FINISH	CP BED D.SF



PD-23-2/3K

MATERIAL	Steel
DIAMETER	ø38
LENGTH	110
FINISH	CP BED D.SF



AT-83

MATERIAL	Alloy
DIAMETER	ø28.6 ø31.8 ø35
FINISH	Barreled Anodized Colors



AT-161

MATERIAL	Forged Alloy
DIAMETER	ø31.8 ø35.0
FINISH	Sand Blasted Anodized Colors



AT-115

MATERIAL	Alloy
DIAMETER	ø25.4 ø28.6 ø31.8 ø35.0
FINISH	Sand Blasted Anodized Colors



AT-182

MATERIAL	Alloy
DIAMETER	ø31.8 ø35.0
FINISH	CNC Anodized Black or Silver



AT-101+SQR-115

MATERIAL	Alloy
DIAMETER	ø28.6 ø31.8 ø35 ø38.1
FINISH	Barreled Anodized Black or Silver



AT-17N+SQR-115

MATERIAL	Alloy
DIAMETER	ø28.6 ø31.8 ø35
FINISH	Barreled Anodized Black or Silver



AT-109+SQR-162

MATERIAL	Alloy
DIAMETER	ø28.6 ø31.8 ø35
FINISH	Sand Blasted Black or Silver



SPR-02

MATERIAL	Alloy
BARBORE	ø28.75 x ø36 / ø25.45 x ø31.8 / 28.6 x ø34 / ø25.4 x ø28.6 / 28.6 x ø31.8
LENGTH	3 / 5 / 10
FINISH	Sand Blasted Anodized Black or Silver Barreled Anodized Black or Silver



AT-101+SQR-116

MATERIAL	Alloy
DIAMETER	ø28.6 ø31.8 ø35
FINISH	Barreled Anodized Black or Silver




SQR-251


MATERIAL	Alloy
BARBORE	M6 M8
LENGTH	37 40 42 47 52
FINISH	Barreled Anodized Colors

MY2020 Zoom Catalog Landscape - V15.indd 64-65
2018/9/18 09:15


FLAT HANDLE BAR

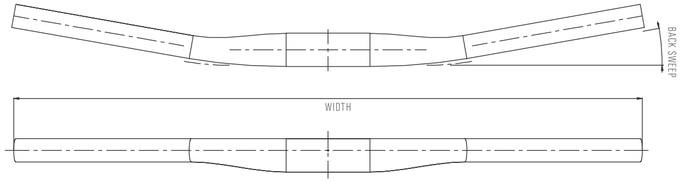


RISE HANDLE BAR




ROAD HANDLE BAR

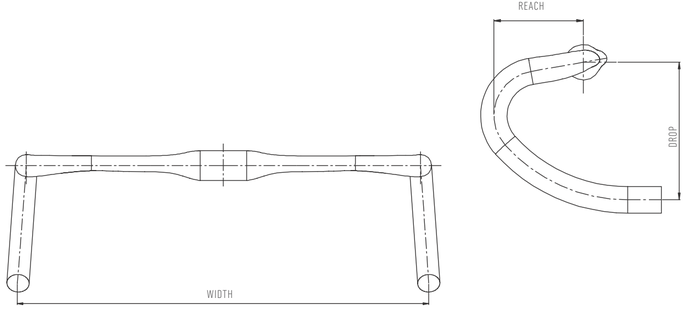

SUSPENSION FORK

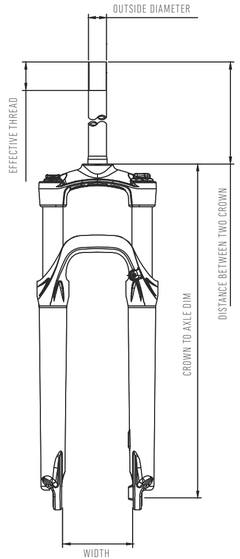

525 - 26"	ø25.4 X ø22.2 X 170L X 40T	27	YS-728	W/ZOOM
MODEL / WHEEL SIZE	OUTSIDE DIAMETER / INTERNAL DIAMETER / EFFECTIVE LENGTH / EFFECTIVE THREAD	CONE	LOWER LEG PAINTING	DECAL

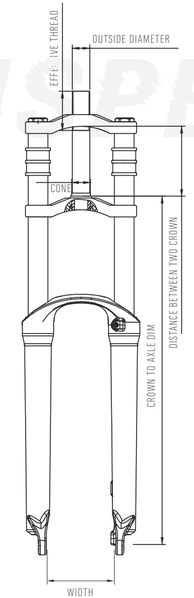



580DH	-26"	ø25.4 X ø22.2 X 172L X 152S X 40T	27	YS-728	W/ZOOM
MODEL	WHEEL SIZE	OUTSIDE DIAMETER / INTERNAL DIAMETER / EFFECTIVE LENGTH / DISTANCE BETWEEN TWO CROWN / EFFECTIVE THREAD	CONE	LOWER LEG PAINTING	DECAL

MY2020 Zoom Catalog Landscape - V15.indd 66-67
2018/9/18 09:15


ADJUST STEM


STEM

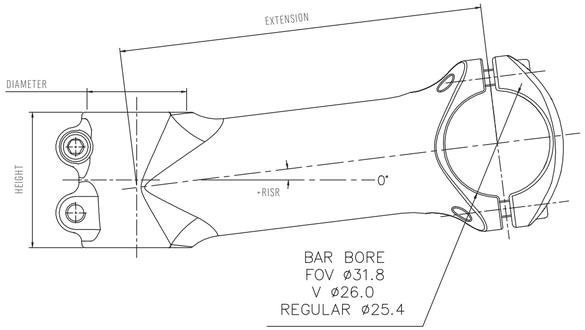

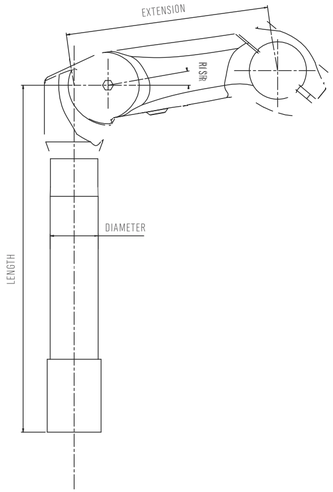


SEAT CLAMP






BAR END

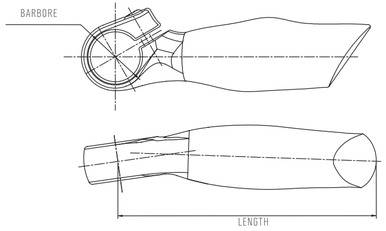

SEAT POST

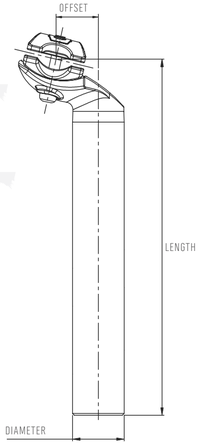

SUSPENSION FORK SPECIFICATIONS

	型号	车型	贴标	接头	外脚	内脚管	弹簧	可调		行程	碟刹	重量	轮轴	轮径	中心距	总长	包装	TCHL/TJHL
NO	MODEL	CATEGORY	DECAL	CROWN	OUTER LEGS	STANCHIONS	SPRING	PRELOAD ADJUSTMENT		TRAVEL	DISC BRAKE MOUNT	TIRE LIMIT (kg)	AXLE SIEE	WHEEL SIZE	CROWN PITCH	CROWN TO AXLE DIM	PACKING	可做产品
1	832AIR	AM	DRIFT	Forged AL	MAGNESIUM	7050 AL(ø32MM)	AIR	I		100MM	Yes	1.75	15MM	27.5	130MM	480MM	4PCS/2.791'	
2	866SAMS	AM	A	Forged AL	MAGNESIUM	HI-TEN(ø32MM)	Elastomer/Coil	I		100MM	Yes	2.4	LEADING	27.5+	148MM	510MM	6PCS/3.543'	
3	866SAMS	AM	A	Forged AL	MAGNESIUM	HI-TEN(ø32MM)	Elastomer/Coil	I		60MM	Yes	2.3	LEADING	24+	148MM	450MM	6PCS/2.451	
4	868SAMS	AM	A	Forged AL	MAGNESIUM	HI-TEN(ø32MM)	Elastomer/Coil	I		100MM	Yes	2.5	LEADING	27.5+	148MM	510MM	6PCS/3.683'	
5	862AIR	AM	A	Forged AL	MAGNESIUM	6061 AL(ø32MM)	AIR	I		100MM	Yes	1.9	15MM	27.5	130MM	480MM	4PCS/2.791'	
6	860AIR	AM	A	Forged AL	MAGNESIUM	6061 AL(ø32MM)	AIR	I		100MM	Yes	1.7	LEADING	27.5 26"	130MM	480MM	4PCS/2.652'	
7	860SAMS	AM	A	Forged AL	MAGNESIUM	HI-TEN(ø32MM)	Elastomer/Coil	I		100MM	Yes	2.5	LEADING	29" 27.5 26"	130MM	480MM	6PCS/2.644'	
8	595SAMS	AM	A	Forged AL	MAGNESIUM	HI-TEN(ø30MM)	Elastomer/Coil	I		100MM	Yes	2.56	LEADING	29" 27.5 26"	130MM	490MM	6PCS/2.644'	
9	525AMS	AM	A	Forged AL	ALLOY A380.2	HI-TEN(ø28.6MM)	Elastomer/Coil	I		100MM	Yes	2.363	LEADING	29" 27.5 26"	125MM	480MM	6PCS/2.231'	TCHL
10	525AMS	AM	A	Forged AL	ALLOY A380.2	HI-TEN(ø28.6MM)	Elastomer/Coil	I		60MM	Yes	2.17	LEADING	24" 20"	125MM	420MM	6PCS/2.213'	
11	565	XC	A	Forged AL	ALLOY A380.2	HI-TEN(ø25.4MM)	Elastomer/Coil	A		80MM	Yes	2.25	LEADING	29" 27.5 26"	120MM	470MM	6PCS/2.227'	TCHL TJHL
12	565D	XC	A	Forged AL	ALLOY(27.5) A380.2	HI-TEN(ø25.4MM)	Elastomer/Coil	A		100MM	Yes	2.14	LEADING	29" 27.5 26"	125MM	500MM	6PCS/2.088'	TCHL TJHL
13	680DHAMS	DH	A	Forged AL	MAGNESIUM	6061 AL(ø37.5MM)	Elastomer/Coil	I		170MM	Yes	3.604	20MM Thru	26"29"	140MM	560MM	4PCS/2.676'	
14	680AMS	AM	A	Forged AL	MAGNESIUM	6061 AL(ø37.5MM)	Elastomer/Coil	I		140MM	Yes	2.744	20MM Thru	26"29"	140MM	550MM	4PCS/2.676'	
15	106/106D	CT	C	Forged AL	MAGNESIUM		Elastomer/Coil	I		25MM	Yes	1.4	LEADING	700C 20"		460MM	4PCS/1.983'	
16	730AMS	EB	C	Forged AL	ALLOY A380.2	HI-TEN(ø28.6MM)	Elastomer/Coil	I		50MM	N/A	2.3	LEADING	700C	107MM	465MM	6PCS/2.027'	
17	730AMS	EB	C	Forged AL	ALLOY A380.2	HI-TEN(ø28.6MM)	Elastomer/Coil	I		50MM	N/A	1.87	LEADING	20"	107MM	350MM	6PCS/1.479'	
18	187AMS	EB	C	Forged AL	ALLOY A380.2	HI-TEN(ø30MM)	Elastomer/Coil	A		65MM	Yes	2.3	LEADING	700C 26"	116MM	450MM	6PCS/2.471'	
19	187DAMS	EB	C	Forged AL	ALLOY A380.2	HI-TEN(ø30MM)	Elastomer/Coil	A		65MM	Yes	2.3	LEADING	700C 26"	116MM	450MM	6PCS/2.317'	TCHL
20	188DSAMS	EB	C	Forged AL	ALLOY A380.2	HI-TEN(ø32MM)	Elastomer/Coil	A		65MM	Yes	2.3	LEADING	700C 26"	120MM	480MM	6PCS"2.317	TCHL
21	141	CT	C	Forged AL	ALLOY A380.2	HI-TEN(ø25.4MM)	Elastomer/Coil	A		45MM	Yes	2.13	LEADING	700C 26"	107MM	460MM	6PCS/2.07'	TCHL
22	141D	CT	C	Forged AL	ALLOY A380.2	HI-TEN(ø25.4MM)	Elastomer/Coil	A		45MM	Yes	2.04	LEADING	700C 26"	107MM	455MM	6PCS/1.595'	TCHL
23	628	MTB	B	Forged AL	HI-TEN	HI-TEN(ø30MM)	Elastomer/Coil	A		80MM	Yes	2.6	LEADING	27.5 26"	140MM	520MM	6PCS/2.655	
24	389	MTB	B	Forged AL	HI-TEN	HI-TEN(ø28.6MM)	Elastomer/Coil	A		60MM	Yes	2.4	LEADING	26"	125MM	470MM	6PCS/2.031'	
25	386A	MTB	B	Forged AL	HI-TEN	HI-TEN(ø25.4MM)	Elastomer/Coil	N/A		60MM	Yes	2.2	LEADING	26"	125MM	445MM	6PCS/1.945'	TCHL TJHL
26	386	MTB	B	Forged AL	HI-TEN	HI-TEN(ø25.4MM)	Elastomer/Coil	A		60MM	Yes	2.34	LEADING	26"	125MM	445MM	6PCS/1.945'	TCHL TJHL
27	620DH	MTB	B	Forged AL	HI-TEN	HI-TEN(ø37.5MM)	Elastomer/Coil	N/A		60MM	Yes	3.48	LEADING	26"	130MM	460MM	4PCS/1.949'	
28	621DH	MTB	B	PRESSED STEEL	HI-TEN	HI-TEN(ø37.5MM)	Elastomer/Coil	A		60MM	Yes	3.5	LEADING	26"	130MM	470MM	4PCS/1.978'	
29	410E	MTB	B	Forged AL	HI-TEN	HI-TEN(ø25.4MM)	Elastomer/Coil	A		50MM	N/A	1.98	IN-LINE	26"	107MM	435MM	6PCS/1.562'	TCHL
30	329	MTB	B	PRESSED STEEL	HI-TEN	HI-TEN(ø25.4MM)	Elastomer/Coil	N/A		50MM	N/A	2.02	LEADING	26"	107MM	435MM	6PCS/1.562'	TCHL
31	327E	MTB	B	PRESSED STEEL	HI-TEN	HI-TEN(ø25.4MM)	Elastomer/Coil	N/A		50MM	N/A	2.12	IN-LINE	26"	107MM	435MM	6PCS/1.562'	TCHL TJHL
32	128	EB	B	Forged AL	HI-TEN	HI-TEN(ø28.6MM)	Elastomer/Coil	A		30MM	N/A	2.14	LEADING	700C	116MM	450MM	6PCS/2.002'	
33	120E	CT	B	Forged AL	HI-TEN	HI-TEN(ø25.4MM)	Elastomer/Coil	A		30MM	N/A	1.96	LEADING	700C	107MM	450MM	6PCS/1.725'	TCHL TJHL
34	130	CT	B	PRESSED STEEL	HI-TEN	HI-TEN(ø25.4MM)	Elastomer/Coil	N/A		30MM	N/A	2.059	LEADING	700C	107MM	450MM	6PCS/1.632'	TCHL TJHL

MY2020 Zoom Catalog Landscape - V15.indd 70-71 2018/9/18 09:15

頁碼 PAGE	品名 MODEL	數量 / 材積 QTY/CUFT	淨重（箱） NET WEIGHT(CTN)	毛重（箱） GROSS WEIGHT(CTN)	單支重量 WEIGHT / PER PIECE
20	TDS-D699-8FOV/ISO-M	50PCS/0.650	6.6(E:70*7")	7.34	0.132
21	TDS-RD701-8FOV/ISO-M	50PCS/0.783	7.4(E:110*7")	8.075	0.146
22	TDS-RD605-8-35/ISO-R	60PCCS/0.655	6.25(E:40-12")	6.843	0.125
22	TDS-RD605-8FOV(31.8MM)ISO-M	60PCCS/0.650	6.25(E:40-12")	6.99	0.125
22	TDS-D607-8-35/ISO-M TDS-RD607-8-35/ISO-R	50PCS/0.784	6.65(E:40-12")6.65	7.42	0.133
23	TDS-D602-8FOV/ISO-M TDS-RD602-8FOV/ISO-R	50PCS/0.783	7.15(E:90-17")	8.875	0.143
23	TDS-D601-8FOV/ISO-M TDS-RD601-8FOV/ISO-R	50PCS/0.783	7.15(E:70*3")	9.64	0.143
23	TDS-D600-8FOV	50PCS/0.783	7.6(E:110*0")	8.265	0.152
24	TDS-D343B-8/ISO-M TDS-RD343B-8/ISO-R	50PCS/0.783	6.5(E:90*7")	8.05	0.13
24	TDS-D479-8FOV/ISO-M TDS-RD479-8FOV/ISO-R	50PCS/0.783	10.1(E:100*7")	10.685	0.202
24	TDS-D507A-8FOV/ISO-M TDS-RD507A-8FOV/ISO-R	50PCS/0.784	6.5(E:100*7")	7.27	0.13
24	TDS-AD499-8FOV/ISO-M	50PCS/0.784	7.7(E:90*7")	8.27	0.15
25	TDS-AL-606-8FOV	60PCCS/0.784	7.62(E:40-12")	8.32	0.127
25	TDS-AL-408FOV/ISO-M	50PCS/0.650	11.45(E:50*30")	12.41	0.229
25	TDS-D120A-8/ISO-M TDS-RD120A-8/ISO-R	50PCS/0.783	9.9(E:110*10")	10.56	0.198
26	TDS-D301-8FOV/ISO-M	50PCS/0.650	8.55(E:90*6")	9.29	0.171
26	TDS-C302-8FOV/ISO-M TDS-RC302-8FOV/ISO-R	50PCS/0.650	9.25(E:90*10")	9.99	0.185
26	TDS-C342-8FOV/ISO-M TDS-RD342-8FOV/ISO-R	50PCS/0.650	6.25(E:60")	6.82	0.125
26	TDS-C369A-8/FOV/ISO-M TDS-RC369A-8/FOV/ISO-R	50PCS/0.650	11(E:90*17")	11.74	0.22
27	TDS-C470A-8FOV/ISO-M	50PCS/0.783	10.5(E:110*10")	11.15	0.21
27	TDS-C476A-8/ISO-M	50PCS/0.783	9.5(E:105*")	10.27	0.19
27	TDS-C340-8/FOV/ISO-M	50PCS/0.783	11.85(E:90*15")	12.62	0.237
27	TDS-C41-8/ISO-M TDS-RC41-8/ISO-R	50PCS/0.783	12(E:110*10")	12.495	0.24
28	TDS-C306-8/ISO-C	50PCS/1.107	23.7(E:110)	24.5	0.474
28	TDS-C533-5/ISO-C	40PCS/0.738	20.96(E:111)	22.51	0.524

頁碼 PAGE	品名 MODEL	數量 / 材積 QTY/CUFT	淨重（箱） NET WEIGHT(CTN)	毛重（箱） GROSS WEIGHT(CTN)	單支重量 WEIGHT / PER PIECE
28	MTS-AL-476-5SUS/ISO-C	30PCS/1.107	20.43(E:110*180)	21.4	0.681
28	MTS-AL-476-5/ISO-C	30PCS/1.107	18.63(E:110*180)	19.56	0.621
28	MTS-C533-5/ISO-C	30PCS/0.783	18.54(E:110*180)	19.245	0.618
29	TDS-D299N-8/FOV/ISO-C	50PCS/0.783	13.2(E:105)	13.79	0.264
29	TDS-C297-8/ISO-C	50PCS/0.783	19.7(E:125)	20.4	0.394
29	MTS-D367N-2/5/FOV/ISO-C	50PCS/1.107	20.5(E:90*180)	21.63	0.41
29	MTS-C297-2/5/ISO-C	40PCS/0.783	20.16(E:90*180)	20.66	0.504
29	MTS-C331-2/5/ISO-C	40PCS/0.783	21.04(E:90*180)	21.88	0.526
29	TDS-C331-8/ISO-C	50PCS/0.783	18.9(E:125)	19.585	0.378
30	TDS-C272-8/ISO-P	50PCS/0.783	19.25(E:90")	21.05	0.385
30	TDS-C269-8FOV/ISO-P	50PCS/0.783	19.1(E:90")	19.04	0.382
30	MTS-C272-5/ISO-P	50PCS/0.65	23.04(E:110)	23.93	0.576
30	MTS-C269-5FOV/ISO-P	50PCS/0.65	21.88(E:110)	22.53	0.547
31	HS-C398-2/5/ISO-C	50PCS/0.783	18.75(E:90*180)	20.09	0.374
31	HA-C39-2/5/ISO-C	50PCS/0.783	17.6(E:40*180)	18.564	0.352
31	HS-C40-2/ISO-C	50PCS/0.540	15.35(L:180)	15.77	0.300
31	HS-C60-2/ISO-C	50PCS/0.783	15.75(L:180)	16.520	0.315
31	HS-C80-2/5ISO-C	50PCS/0.783	19.0(E:80*180)	19.645	0.417
31	HA-C40-2/5/ISO-C	50PCS/0.650	16.25(L:180)	16.676	0.325
31	HA-C40-2/5SUS/ISO-C	50PCS/0.784	16.25(L:180)	16.526	0.325
31	HA-C60-2/5/ISO-C	50PCS/0.650	19(L:180)	17.705	0.380
31	HA-C80-2/5/ISO-C	50PCS/0.843	19.5(L:180)	20.0	0.39
32	HE-AD77-2/5/ISO-C	50PCS/1.179	15.3(E:110-17**180)	18.608	0.306
32	HE-C80D-2/ISO-C	50PCS/0.783	15.4(E:80-17")	15.980	0.308
32	MTS-319-2/5/ISO-M	50PCS/0.930	18.4(E:80*10**180)	18.92	0.46

MY2020 Zoom Catalog Landscape - V15.indd 72-73 2018/9/18 09:15

頁碼 PAGE	品名 MODEL	數量 / 材積 QTY/CUFT	淨重（箱） NET WEIGHT(CTN)	毛重（箱） GROSS WEIGHT(CTN)	單支重量 WEIGHT / PER PIECE
32	Q-8-1/2/5AS	50PCS/0.405	9.5(L:130)	0.352	0.19
32	Q-8-1/2/5ST	80PCS/0.650	20.48(L:130)	21.19	0.256
33	MX-625-5/8/ISO-M	50PCS/0.650	11.5	11.923	0.23
33	MX-628-8/ISO-M	50PCS/0.651	13	13.423	0.260
33	MX-C630-8/ISO-M	50PCS/0.650	14.95	15.503	0.299
33	MX-C631-8/ISO-M	50PCS/0.650	14.05	14.673	0.281
33	MX-413-5/8/ISO-M	50PCS/0.783	15	15.526	0.300
33	MX-C784-2/ISO-K MX-C784-2FS	50PCS/0.650	18(L:145)	18.498	0.360
34	FB-AL-600-8/ISO-C	20PCS/1.107	14.84(6"L:425)	16.240	0.742
35	FB-D308NLB-8/ISO-C FB-D308NRB-8/ISO-C	20PCS/1.107	15.86(6"L:313-435)	16.661	0.793
35	FB-D308NLB-2/5/ISO-C FB-D308NRB-2/5/ISO-C	12PCS/1.107	10.68(0"L:418-540)	11.740	0.890
35	FB-AL-139RB-2/5(ISO-C)	20PCS/1.107	12.58(L:350)	13.325	0.270
35	FB-AL-139LB-2/5(ISO-C)	20PCS/1.107	12.58(L:350)	13.885	0.629
35	FB-120RB-2/5(ISO-C)	25PCS/1.312	24.725(30"L:350)	25.870	0.989
35	FB-120LB-2/5(ISO-C)	25PCS/1.312	24.675(30"L:350)	25.697	0.983
38	DR-AL-199BT FOV/ISO-R	20PCS/2.279	6.32(W:420)	7.677	0.304
39	DR-AL-194BT FOV/ISO-R	20PCS/3.109	6.86(W:420)	8.819	0.343
39	DR-AL-211BT FOV/ISO-R	20PCS/2.279	6.56(W:420)	7.787	0.328
39	DR-AL-197FOV/ISO-C	20PCS/2.280	6.88(W:430)	8.24	0.344
39	DR-AL-210B	20PCS/2.279	6.26(W:400)	6.573	0.328
39	DR-AL-210B BT/ISO-R	20PCS/2.279	5.76(W:440)	7.099	0.302
39	DR-AL-210BT FOV/ISO-R	20PCS/2.279	6.56(W:420)	7.787	0.328
40	DR-AL-130	25PCS/2.279	8.25(W:420)	10.529	0.33
40	DR-AL-149BT FOV/ISO-C	40PCS/2.279	9.8(W:440)	11.607	0.28

頁碼 PAGE	品名 MODEL	數量 / 材積 QTY/CUFT	淨重（箱） NET WEIGHT(CTN)	毛重（箱） GROSS WEIGHT(CTN)	單支重量 WEIGHT / PER PIECE
40	DR-123/ISO-R	25PCS/1.859	19.5(W:420)	20.469	0.78
40	DR-AL-123B	25PCS/1.859	9.0(W:420)	10.107	0.360
40	DR-AL-123B BT/ISO-R	25PCS/2.279	8.425(W:420)	9.925	0.337
40	DR-AL-123B FOV	25PCS/2.279	9.2(W:420)	10.7	0.368
40	DR-AL-123B BT FOV/ISO-R	25PCS/2.279	8.225(W:420)	9.825	0.329
41	MTB-AL-3512BT/ISO-M	40PCS/2.005	11.68(W:800)	12.653	0.292
41	MTB-AL-3500BT/ISO-M	40PCS/2.005	11.60(W:800)	13.148	0.290
41	MTB-AL-3520BT/ISO-M	40PCS/2.005	12.2(W:800)	13.748	0.305
42	MTB-AL-300BTFOV/ISO-M	50PCS/1.395	11.95(W:620*6")	13.198	0.239
42	MTB-AL-312BTFOV/ISO-M	50PCS/1.122	11.8(W:620*6")	13.02	0.224
42	MTB-AL-320BTFOV/ISO-M	50PCS/1.395	11.5(W:620*6")	13.2	0.23
42	MTB-110PP/ISO-M	50PCS/0.810	21.6(W:600*6")	22.797	0.432
42	MTB-110FOV/ISO-M	25PCS/0.736	13.6(W:660*10")	14.73	0.544
42	MTB-AL-110PP/ISO-C	50PCS/0.810	25(W:620*6")	25.794	0.500
42	MTB-AL-110BT/ISO-M	50PCS/1.122	12(W:600*6")	12.957	0.24
42	MTB-AL-110FOV/ISO-C	40PCS/1.122	21.720(W:660*6")	30.796	0.543
42	MTB-AL-110BT FOV/ISO-M	50PCS/1.122	10.5(W:620*10")	11.457	0.23
43	MTB-AL-325BTFOV/ISO-M	50PCS/1.395	12(W:620*6")	15.559	0.24
43	MTB-AL-330BTFOV/ISO-M	50PCS/1.395	12(W:620*9")	13.2	0.23
43	MTB-AL-345BTFOV/ISO-M	50PCS/1.395	11.7(W:620*6")	12.928	0.234
44	MTB-155TP/ISO-C	50PCS/1.122	21.50(W:620*7")	22.544	0.43
44	MTB-AL-155TP/ISO-C	50PCS/1.122	13.05(W:580*10")	13.947	0.216
44	MTB-156TP/ISO-C	50PCS/1.122	23(W:600*15")	24.264	0.461
44	MTB-AL-156TP/ISO-C	50PCS/1.395	14.250(W:600*15")	15.308	0.285
44	MTB-158TP/ISO-C	30PCS/1.122	14.970(W:600*10")	16.074	0.499

MY2020 Zoom Catalog Landscape - V15.indd 74-75 2018/9/18 09:15

頁碼 PAGE	品名 MODEL	數量 / 材積 QTY/CUFT	淨重（箱） NET WEIGHT(CTN)	毛重（箱） GROSS WEIGHT(CTN)	單支重量 WEIGHT / PER PIECE
44	MTB-AL-158TP/ISO-C	50PCS/1.859	17.05(W:600*15*)	18.316	0.341
44	MTB-152TP/ISO-M	50PCS/1.122	29(W:620*6*)	29.894	0.58
44	MTB-AL-152TP/ISO-C	50PCS/1.122	12.5(W:600*6*)	14.394	0.25
44	MTB-AL-152BT/ISO-M	50PCS/1.122	11.75(W:580*10*)	12.644	0.235
44	MTB-153TP/ISO-M	50PCS/0.810	21.650(W:620*10*)	22.444	0.433
44	MTB-AL-153TP/ISO-C	50PCS/1.859	22.8(W:620*6*)	23.594	0.456
44	MTB-AL-153BT/ISO-M	50PCS/1.122	12.15(W:600*6*)	13.044	0.243
44	MTB-154TP/ISO-M	50PCS/1.122	27(W:560*15*)	27.957	0.43
44	MTB-AL-154TP/ISO-C	50PCS/1.122	13.15(W:580*15*)	14.107	0.26
44	MTB-AL-154BT/ISO-M	50PCS/1.395	12.15(W:620*10*)	13.709	0.25
45	MTB-181/ISO-C	20PCS/2.279	20.2(W:600)	21.301	1.01
45	MTB-AL-181/ISO-C	20PCS/2.279	10.4(W:600)	12.135	0.52
45	NR-21/ISO-C	30PCS/1.859	12(W:540)	17.306	0.4
45	NR-AL-21/ISO-C	25PCS/1.395	8.9(W:500)	9.983	0.356
45	ARC-540/ISO-C	50PCS/1.395	20.2(W:560)	21.108	0.404
45	ARC-AL-540/FOV/ISO-C	50PCS/1.395	14.5(W:620)	15.408	0.29
45	NR-AL-196BT FOV/ISO-C	50PCS/1.395	14.35(W:620+18*)	15.559	0.287
45	NR-AL-124FOV/ISO-C	30PCS/1.859	11.76(W:620)	12.944	0.392
46	TR-28/ISO-C	35PCS/1.395	19.46(W:600)	20.368	0.556
46	TR-AL-28/ISO-C	35PCS/1.395	12.18(W:600)	13.088	0.348
46	SU-TYPE/ISO-C	30PCS/1.859	16.2(W:500)	17.037	0.54
46	SU-AL-TYPE/ISO-C	30PCS/1.859	9.9(W:500)	10.737	0.33
46	NR-14/ISO-C	30PCS/1.395	16.8(W:595)	17.708	0.56
46	NR-AL-14/ISO-C	30PCS/1.395	11.1(W:610)	12.008	0.37
46	NR-16/ISO-C	50PCS/1.395	24.5(W:610)	25.411	0.49

頁碼 PAGE	品名 MODEL	數量 / 材積 QTY/CUFT	淨重（箱） NET WEIGHT(CTN)	毛重（箱） GROSS WEIGHT(CTN)	單支重量 WEIGHT / PER PIECE
46	NR-AL-16/ISO-C	50PCS/1.395	15.5(W:610)	16.408	0.31
47	BH-21/S/ISO-C	20PCS/2.350	16.6(W:650)	17.619	0.83
47	BH-AL-21/S/ISO-C	25PCS/2.35	10.25(W:635)	11.269	0.41
47	BH-226/ISO-C BH-CR-226/ISO-C	20PCS/1.859	17.4(W:636)	18.25	0.87
47	MX- 317/ISO-M MX-CR-317/ISO-M	25PCS/2.279	21(W:580)	22.832	0.77
47	MX-AL-470	25PCS/1.028	5.825(W:450)	7.24	0.233
50	SPD-801/ISO-M	25PCS/0.578	16.3(ø31.6*335)	14.95	0.652
50	SPD-801E/ISO-M	25PCS/0.578	17.05(ø31.6*365)	14.95	0.682
51	SP-277ACF/ISO-R	50PCS/1.350	12.35(ø27.2*350)	13.16	0.24
51	SP-277/ISO-R	50PCS/1.203	15.45(ø27.2*350)	16.61	0.293
52	SP-297NACF/ISO-M	50PCS/1.350	11.4(ø27.2*350)	12.56	0.228
52	SP-D297N/ISO-M	50PCS/1.350	13.3(ø27.2*350)	14.16	0.266
52	SP-297N/ISO-M	50PCS/1.117	14.55(ø27.2*350)	15.784	0.291
52	SP-406ACF/ISO-M	50PCS/1.350	13.9(ø27.2*350)	15.078	0.238
52	SP-406/ISO-M	50PCS/1.203	14.65(ø27.2*350)	15.824	0.293
52	SP-D292/ISO-M/ISO-R	50PCS/1.350	14.55(ø27.2*350)	15.582	0.297
53	SP-219NACF/ISO-M	50PCS/1.350	13.05(ø27.2*350)	16.168	0.261
53	SP-219N/ISO-M	50PCS/1.117	15.95(ø27.2*350)	17.005	0.319
53	SP-215ACF/ISO-M	50PCS/1.350	13.2(ø27.2*350)	14.36	0.264
53	SP-D215/ISO-M	50PCS/1.350	14.5(ø27.2*350)	15.202	0.29
53	SP-215/ISO-M	50PCS/0.918	14.45(ø27.2*300)	15.425	0.289
54	SP-C255/ISO-M	50PCS/1.117	15.35(ø27.2*350)	16.955	0.307
54	SP-218/ISO-M	50PCS/1.117	16.05(ø27.2*350)	17.228	0.321
54	SP-C207/ISO-M	50PCS/1.203	16.05(ø27.2*350)	17.154	0.321

MY2020 Zoom Catalog Landscape - V15.indd 76-77 2018/9/18 09:15

頁碼 PAGE	品名 MODEL	數量 / 材積 QTY/CUFT	淨重（箱） NET WEIGHT(CTN)	毛重（箱） GROSS WEIGHT(CTN)	單支重量 WEIGHT / PER PIECE
54	SP-C208/ISO-M	50PCS/1.117	17.15(ø27.2*350)	18.338	0.343
55	SP-216/ISO-M	50PCS/0.918	16.2(ø27.2*300)	16.769	0.324
55	SP-C212/ISO-M	50PCS/1.203	17.75(ø31.6*350)	19.164	0.355
55	SP-102/ISO-M	100PCS/1.107	15.872(ø27.2*350)	16.368	0.153
55	SP-181/ISO-M	50PCS/0.736	19.15(ø25.4*300)	20	0.383
55	SP-AL-181/ISO-M	50PCS/0.650	8.75(ø27.2*250)	8.55	0.175
55	SP-90/ISO-M	50PCS/1.203	18.7(ø31.6*350)	19.904	0.374
55	SP-87/ISO-C	50PCS/0.736	17.2(ø27.2*218)	17.95	0.344
56	SPS-405/ISO-C	25PCS/0.578	12.5(ø27.2*350)	13.45	0.505
56	SPS-C372/ISO-C	25PCS/0.578	13.1(ø27.2*350)	13.848	0.524
57	SPS-C373/ISO-C	25PCS/0.578	14(ø27.2*350)	14.645	0.561
57	SPS-78N/ISO-C	35PCS/0.578	16.45(ø27.2*350)	17.4	0.47
57	SPS-79/ISO-C	35PCS/0.578	20.65(ø27.2*350)	21.6	0.59



NO.	FINISH	DESRCIPTION	表面處理
1	BARREL	Barrel	震動打亮
2	B.A.S	Barrel Anodized Silver	水磨陽極本色
3	BED	Electric-Deposit Black	電著黑
4	MCF	Matt Carbon Finish	碳纖消光本色
5	GCF	Glossy Carbon Finish	碳纖亮光本色
6	CP	Chrome-Plating	電鍍
7	D.SF	Dry Satin Finish	電鍍粉體 SF
8	H.A.BK	Hi-Polish Anodized Black	麻輪陽極黑色
9	H.A.BL	Hi-Polish Anodized Blue	麻輪陽極藍色
10	H.A.P	Hi-Polish Anodized Purple	麻輪陽極紫色
11	H.A.RD	Hi-Polish Anodized Red	麻輪陽極紅色
12	H.A.S	Hi-Polish Anodized Silver	麻輪陽極本色
13	H.P.S	Hi-Polish Silver	麻輪本色
14	HS.A.S	Hi-Polish Satin Anodized Silver	麻輪霧面陽極本色
15	LS.A.S	Lathe Satin Anodized Silver	車削霧面陽極本色
16	L.A.S	Lathe Anodized Silver	車削陽極本色
17	L.A.BK	Lathe Anodized Black	車削陽極黑色
18	MABK	Machined Anodized Black	CNC 陽極黑色
19	MSBED	Matt Electric-Deposit Black	消光電著黑
20	SSBED	Sand Blast Satin Electric-Deposit Black	噴砂霧面電著黑色
21	P.C.BL	Powder Coating Blue	粉體烤漆藍色
22	P.C.RD	Powder Coating Red	粉體烤漆紅色
23	P.C.Y	Powder Coating Yellow	粉體烤漆黃色
24	RAW	Raw	毛胚
25	S.BED	Sand Blast Electric-Deposit Black	噴砂電著黑色
26	SS.A.BK	Sand Blast Satin Anodized Black	噴砂霧面陽極黑色
27	SS.A.S	Sand Blast Satin Anodized Silver	噴砂霧面陽極本色
28	HPP	High end Hi-Polish	鏡面拋光
29	HPPC	High-end Hi-Polish Clear Coating	鏡面拋光加金油
30	SSAG	Sand Blast Satin Anodized Grey	噴砂鐵灰色

MY2020 Zoom Catalog Landscape - V15.indd 78-79 2018/9/18 09:15



ZOOM

PRECISION STEERING COMPONENTS

HL CORP (SHENZHEN)
The 3rd Industrial Park, Bitou Village, Song Gang Town
Baoan District, Shenzhen, Guangdong,518105 China
T: +86-755-2713 0185 F: +86-755-2713-0190
E: sales@hlcorp.com

HL CORP (TIAN JIN)
ShuangTang Metal Product Industry Park, Shuangtang
Town, Jinghai, Tianjin, 301600 China
T: +86-022-5959 1888 F: +86-022-59592088
E: sales_tj@hlcorp.com

HL CORP(TAI CANG)
No.333 Zhenghe East Road, Sangang Village, Ludu
TownTaicang City Jiangsu Province,215412 China
T: +86-512-8177 9999 F: +86-512-5345 1810
E: sales_t@hlcorp.com

HL CORP (HONG KONG) LIMITED
20F, Wui Tai Centre, 55 Connaught Road West, Hong Kong
T: +852-2559 3876 F: +852-2803-7352
E: linda@hlcorp.com.hk

HL CORP(USA)
11410 Knott Street Garden Grove,CA 92841 U.S.A
T: +1-714-894-1500 F: +1-714-894-1522
E: sales_usa@hlcorp.com

HL-VT CORP (VIETNAM)
Lot 17-6, 3B Road, International Protrade Industrial
Park , An Tay Town, Ben Cat District, Binh Duong
Province, Viet Nam
T: +84-274-3585853 F: +84-274-358586

深圳信隆健康产业发展股份有限公司
中国广东省深圳市宝安区松岗街道办碧头社区第三工业区
邮编：518105

天津信隆实业有限公司
中国天津市静海县双塘镇双塘高档五金制品产业园（静陈路，崔扬路口）
邮编：301600

太仓信隆车料有限公司
中国江苏省太仓市陆渡镇三港村郑和东路 333 号
邮编：215412

信隆实业（香港）有限公司
香港上环干诺道西 55 号会达中心 20 楼

信隆实业（美国）有限公司

信友实业（越南）责任有限公司
平阳省滨吉市安西乡宝翠工业区3B号路17-6号