









RST

2015 Catalogue

RST
RAPID SUSPENSION TECHNOLOGY

RST

CONTENT

Product Overview 2
color options
steerer weight

Evolution 3

DH/AM/FR
KILLAH 5
STITCH 6
ROGUE 7
TITAN 15 / TITAN 8

XC/ATB
CHAMP 29-15 / 29 9
CHAMP 27.5-15 / 27.5 10
CHAMP 26 11
F1RST Platinum 12
F1RST 29-15 / 29 13
F1RST 27.5-15 / 27.5 14
F1RST 26 / 24 15
AERIAL 29 / 27.5 16
AERIAL 26 / 24 17
OMEGA 29 / 27.5 / 26 18
BLAZE 29 / 27.5 / 26 25
GILA 27.5 / 26 26
CAPA 27

DIRT JUMP
SPACE / DIRT 28

SPEEDY E-BIKE
PULSE Air 29 / 27.5 / 26 19
PULSE Coil 29 / 27.5 / 26 20

CROSS / TREKKING / ROAD
VOGUE 21
VIVAir / VITA 22
SINGLE SHOCK 23
SS-M7 / T, SS-M6 / T
SS-A7 / T, SS-A6 / T
SINGLE SHOCK 24
SS-A4, SS-A2
RIGID FORKS
RF-M7 / 6
NOVA / NEON 29
VERSE / SOFI / URBAN 30



PRODUCT OVERVIEW

		DH	FR	AM	XC 29'er	XC 27.5	XC 26	DJ	Sport	Junior	Cross	Trekking	Speedy E-bike	E-bike	Pedelec
Taiwan-Made Product	$$$$	KILLAH			CHAMP 29-15	CHAMP 27.5-15	CHAMP 26								
			STITCH		CHAMP 29	CHAMP 27.5									
				ROGUE											
				TITAN 15			F1RST Platinum								
				TITAN											
	$$$$				F1RST 29-15	F1RST 27.5-15	F1RST 26	SPACE		F1RST 24	VOGUE				VOGUE
					F1RST 29	F1RST 27.5									
	$$$				AERIAL 29	AERIAL 27.5	AERIAL 26			AERIAL 24	VIVAir	Single Shock M series	PULSE Air 29 / 27.5 / 26		
												Single Shock A series	PULSE Coil 29 / 27.5 / 26		
					OMEGA 29	OMEGA 27.5	OMEGA 26				VITA				VITA
China-Made Product	$$				BLAZE 29	BLAZE 27.5	BLAZE 26	DIRT			NOVA	VERSE		NOVA/ VERSE	
						GILA 27.5	GILA 26		CAPA 26	CAPA 24/20	NEON	SOFI			SOFI
												URBAN			

COLOR OPTIONS

DK-8011 SHINY BLACK (YS-728)

DK-8010 MATT BLACK (YS-727)

DK-9032 GLOSS SILVER (YS-7605)

DK-0011 GLOSS WHITE (YS-701)

DK-0012 PEARL WHITE (YS-775)

STEERER WEIGHT

Steerer Tube		Length	Weight
Aluminum 7050	28.6mm	260mm	176g
Aluminum 7050	1.5"	260mm	205g
Aluminum 7050	1.5" Taper	260mm	186g
Hi-ten	28.6mm	260mm	326g
Hi-ten	25.4mm	260mm	290g



27.5 represents the logical evolution of Mountain bikes:

It combines the best in both worlds, the lower rolling resistance of a larger wheel along with the agility and weight advantage of a small wheel, just the balance that is needed on an All-Mountain/ Enduro bike. Back to the Future with our 27.5" line-up!



The new 34mm Enduro fork project – The RST ROGUE


The ROGUE is the latest creation from our passionate R&D team to meet the demands of Enduro and AM riders around the globe. The new 34mm stanchions allow us the perfect balance between torsional strength and light weight performance in a 160mm fork.



Road suspension – The RST via

The Hydro forming technology is already widely used in the world, however, RST combines the 2nd Needle Bearing System and Hydro Forming Tech. to create a suspension Road Racing fork in RST MY 2015 lineup.

Single Shock 2ND GENERATION = Comfortable, Smooth Performance

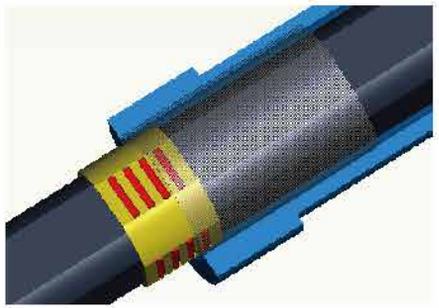

An elegant appearance will always be a primary concern for a commuting bicycle. The RST Single Shock combines an elegant appearance with a highly developed suspension system. The 2nd generation Single Shock uses an advanced Needle Bearing System that provides:

- Riding Comfort.
- Smooth Performance.
- Long time wear resistance.
- Excellent compatibility with most of the frames on the market.

The simple ergonomic design of our Remote lockout shifters – "RL".



RL – Option available for RST middle and entry level forks.

- Compact, easy to use design which can be mounted close to the grip even on today's crowded handlebars for quick access.
- Works with all forks having TNL lock-out dampers.

*OMEGA Series, VITA will move to TAIWAN for production from APR. 1st, 2014.

NEW!

KILLAH



KILLAH
RAPID SUSPENSION TECHNOLOGY

*For 27.5" and 26".

	Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
NEW!	**KILLAH**	28.6mm 7050 Aluminum	36mm 7050 Aluminum Hard Anodize	Magnesium	Coil	R, C	200	27.5": 580 26": 565	Disc only	27.5": 3.43 26": 3.41

*R: Rebound, C: Compression

NEW!

STITCH



STITCH

RAPID SUSPENSION TECHNOLOGY

*For 27.5" and 26".

*Option of STITCH: 1.5" steerer (Straight or Taper)

	Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
NEW!	**STITCH AIR**	28.6mm 7050 Aluminum	36mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, C	160, 170, 180	27.5": 555 / 565 / 575 26": 540 / 550 / 560	Disc only	27.5": 2.58 26": 2.56
NEW!	STITCH SUPER	28.6mm Cr-mo Steel	36mm Cr-mo Steel QPQ black	Magnesium	Coil	R	160, 170, 180	27.5": 555 / 565 / 575 26": 540 / 550 / 560	Disc only	27.5": 3.08 26": 3.06

*A: Air, R: Rebound, C: Compression

NEW!

ROGUE



ROGUE

*Option of ROGUE: 1.5" steerer (Straight or Taper)

*For 27.5" and 26".

	Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
NEW!	**ROGUE TRL**	28.6mm 7050 Aluminum	34mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	140, 150, 160	27.5": 535 / 545 / 555 26": 520 / 530 / 540	Disc only	27.5": 2.38 26": 2.36
NEW!	ROGUE	28.6mm 7050 Aluminum	34mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	140, 150, 160	27.5": 535 / 545 / 555 26": 520 / 530 / 540	Disc only	27.5": 2.36 26": 2.34

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out, C: Compression

TITAN 15



TITAN



*Option of TITAN 15 / TITAN: 1.5" steerer (Straight or Taper)

Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
TITAN 15 TRL	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	140, 150	520 / 530	Disc only	2.16
TITAN 15	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	140, 150	520 / 530	Disc only	2.14
TITAN TRL	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	140	520	Disc or D+V	2.01
TITAN	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	140	520	Disc or D+V	1.99

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out, C: Compression

CHAMP 29-15



CHAMP 29



CHAMP

*Option of CHAMP 29-15 / CHAMP 29: 1.5" steerer (Straight or Taper)

Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
CHAMP 29-15 TRL	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	80, 100, 120	490 / 510 / 530	Disc only	1.82
CHAMP 29-15	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	80, 100, 120	490 / 510 / 530	Disc only	1.80
CHAMP 29 TRL	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	80, 100, 120	490 / 510 / 530	Disc only	1.63
CHAMP 29	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	80, 100, 120	490 / 510 / 530	Disc only	1.61

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out, C: Compression

NEW!

CHAMP 27.5-15



NEW!

CHAMP 27.5



CHAMP

*Option of CHAMP 27.5-15 / CHAMP 27.5: 1.5" steerer (Straight or Taper)

	Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
NEW!	**CHAMP 27.5-15 TRL**	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	80, 100, 120	475 / 495 / 515	Disc only	1.67
NEW!	**CHAMP 27.5-15**	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	80, 100, 120	475 / 495 / 515	Disc only	1.65
NEW!	**CHAMP 27.5 TRL**	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	80, 100, 120	475 / 495 / 515	Disc only	1.62
NEW!	**CHAMP 27.5**	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	80, 100, 120	475 / 495 / 515	Disc only	1.60

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out, C: Compression

CHAMP 26



CHAMP

*Option of CHAMP 26: 1.5" steerer (Straight or Taper)

Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
CHAMP 26 TRL	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	80, 100, 120	460 / 480 / 500	Disc only	1.53
CHAMP 26	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	80, 100, 120	460 / 480 / 500	Disc only	1.51

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out, C: Compression

F1RST Platinum



*Option of F1RST Platinum: 1.5" steerer (Straight or Taper)

Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
F1RST Platinum TRL	28.6mm 7050 Aluminum	30mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	80, 100	460 / 480	Disc or D+V	1.52
F1RST Platinum	28.6mm 7050 Aluminum	30mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	80, 100	460 / 480	Disc or D+V	1.50

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out, C: Compression

F1RST 29-15



F1RST 29





*Option of F1RST 29-15 / F1RST 29: 1.5" steerer (Straight or Taper)

Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
F1RST 29-15 TRL	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	80, 100, 120	490 / 510 / 530	Disc only	2.15
F1RST 29-15	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	80, 100, 120	490 / 510 / 530	Disc only	2.13
F1RST 29 TRL	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	80, 100, 120	490 / 510 / 530	Disc only	1.96
F1RST 29	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	80, 100, 120	490 / 510 / 530	Disc only	1.94

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out, C: Compression

NEW! F1RST 27.5-15



NEW! F1RST 27.5





*Option of F1RST 27.5-15 / F1RST 27.5: 1.5" steerer (Straight or Taper)

	Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
NEW!	**F1RST** 27.5-15 **TRL**	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	80, 100, 120	475 / 495 / 515	Disc only	1.98
NEW!	**F1RST 27.5-15**	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	80, 100, 120	475 / 495 / 515	Disc only	1.96
NEW!	**F1RST 27.5 TRL**	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	80, 100, 120	475 / 495 / 515	Disc only	1.93
NEW!	**F1RST 27.5**	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	80, 100, 120	475 / 495 / 515	Disc only	1.91

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out, C: Compression

F1RST 26



F1RST 24





*Option of F1RST 26: 1.5" steerer (Straight or Taper)

Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
F1RST 26 TRL	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	80, 100, 120	460 / 480 / 500	Disc or D+V	1.82
F1RST 26	28.6mm 7050 Aluminum	32mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	80, 100, 120	460 / 480 / 500	Disc or D+V	1.80
F1RST 24 TRL	28.6mm 7050 Aluminum	28.6mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	60	410	D+V	1.62
F1RST 24	28.6mm 7050 Aluminum	28.6mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	60	410	D+V	1.60

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out, C: Compression

AERIAL 29



NEW!

AERIAL 27.5



Air Cartridge



*Option of AERIAL 29 / AERIAL 27.5: 1.5" steerer (Straight or Taper)

	Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
	AERIAL 29 RL	28.6mm 7050 Aluminum	32mm Steel QPQ black	Magnesium	Air	A, RL	80, 100, 120	490 / 510 / 530	Disc only	2.36
	AERIAL 29 TNL	28.6mm 7050 Aluminum	32mm Steel QPQ black	Magnesium	Air	A, L	80, 100, 120	490 / 510 / 530	Disc only	2.28
NEW!	**AERIAL 27.5 RL**	28.6mm 7050 Aluminum	32mm Steel QPQ black	Magnesium	Air	A, RL	80, 100, 120	475 / 495 / 515	Disc only	2.28
NEW!	**AERIAL 27.5 TNL**	28.6mm 7050 Aluminum	32mm Steel QPQ black	Magnesium	Air	A, L	80, 100, 120	475 / 495 / 515	Disc only	2.20

*A: Air, RL: Remote Lock-out, L: Lock-out

AERIAL 26



AERIAL 24



Air Cartridge



*Option of AERIAL 26 : 1.5" steerer (Straight or Taper)

Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
AERIAL 26 RL	28.6mm 7050 Aluminum	32mm Steel QPQ black	Magnesium	Air	A, RL	80, 100, 120	460 / 480 / 500	Disc or D+V	2.33
AERIAL 26 TNL	28.6mm 7050 Aluminum	32mm Steel QPQ black	Magnesium	Air	A, L	80, 100, 120	460 / 480 / 500	Disc or D+V	2.25
AERIAL 24 RL	28.6mm 7050 Aluminum	28.6mm Steel QPQ black	Magnesium	Air	A, RL	60	410	D+V	2.01
AERIAL 24 TNL	28.6mm 7050 Aluminum	28.6mm Steel QPQ black	Magnesium	Air	A, L	60	410	D+V	1.93

*A: Air, RL: Remote Lock-out, L: Lock-out

OMEGA 29



NEW!

OMEGA 27.5



OMEGA 26



OMEGA RST

Model	Steerer	Stanchion	Lower	Spring	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
OMEGA 29	28.6mm Steel	32mm Steel QPQ black	Magnesium	Coil	80, 100, 120	490 / 510 / 530	Disc only	RL:2.55, TNL:2.47
NEW! **OMEGA 27.5**	28.6mm Steel	32mm Steel QPQ black	Magnesium	Coil	80, 100, 120	475 / 495 / 515	Disc only	RL:2.52, TNL:2.44
OMEGA 26	28.6mm Steel	30mm Steel QPQ black	Magnesium	Coil	80, 100, 120	460 / 480 / 500	Disc or D+V	RL:2.44, TNL:2.37

*Function Option available: RL: Hydraulic Remote Lockout, TNL: Hydraulic Lockout

PULSE Air 29



PULSE Air 27.5



PULSE Air 26



Model	Steerer	Stanchion	Lower	Spring	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
PULSE AIR 29	28.6mm Steel	30mm Steel QPQ black	Aluminum	Air	50	460	Disc or D+V	RL:2.91, TNL:2.83
PULSE AIR 27.5	28.6mm Steel	30mm Steel QPQ black	Aluminum	Air	50	445	Disc only	RL:2.82, TNL:2.75
PULSE AIR 26	28.6mm Steel	30mm Steel QPQ black	Aluminum	Air	50	430	Disc or D+V	RL:2.61, TNL:2.54

*Function Option available: RL: Hydraulic Remote Lockout, TNL: Hydraulic Lockout
*Reflector is available from Bumm Model No. 306 KEB
*With Standard Fender Mount Bracket

PULSE Coil 29



PULSE Coil 27.5



PULSE Coil 26



Model	Steerer	Stanchion	Lower	Spring	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
PULSE COIL 29	28.6mm Steel	30mm Steel QPQ black	Aluminum	Coil	50	460	Disc or D+V	RL:2.92, TNL:2.84
PULSE COIL 27.5	28.6mm Steel	30mm Steel QPQ black	Aluminum	Coil	50	445	Disc only	RL:2.83, TNL:2.76
PULSE COIL 26	28.6mm Steel	30mm Steel QPQ black	Aluminum	Coil	50	430	Disc or D+V	RL:2.62, TNL:2.55

*Function Option available: RL: Hydraulic Remote Lockout, TNL: Hydraulic Lockout
*Reflector is available from Bumm Model No. 306 KEB
*With Standard Fender Mount Bracket

VOGUE



VOGUE suitable for Pedelec only

*Option of VOGUE : 1.5" steerer (Straight or Taper)

Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
VOGUE AIR TRL	28.6mm 7050 Aluminum	28.6mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, RL	700C: 50, 60, 75	700C: 460 / 470 / 485	Disc or D+V	1.65
VOGUE AIR	28.6mm 7050 Aluminum	28.6mm 7050 Aluminum Hard Anodize	Magnesium	Air	A, R, L, C	700C: 50, 60, 75	700C: 460 / 470 / 485	Disc or D+V	1.63

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out, C: Compression

VIVAir



VITA



*Option of VIVAir : 1.5" steerer (Straight or Taper)

VITA suitable for Pedelec only

Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
VIVAir	28.6mm 7050 Aluminum	28.6mm Steel QPQ black	Magnesium	Air	A, L	700C: 50, 60	700C: 460 / 470	Disc or D+V	RL:2.10, TNL:2.02
VITA	28.6 / 25.4mm Steel	28.6mm Steel QPQ black	Magnesium	Coil	L	700C: 50, 60	700C: 460 / 470	Disc or D+V	RL:2.28, TNL:2.20

*Function Option available: RL: Hydraulic Remote Lockout, TNL: Hydraulic Lockout

SS M7



SS M6



SS A7



SS A6



SS A7 T / SS A7 / SS A6 suitable for E-BIKE and Pedelec
SS A6 T suitable for Pedelec only

Model	Wheel Size	Steerer	Lower	Preload Adjustment (T)	Spring	Travel (mm)	Fork Height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
SS M7	700C	28.6mm 7050 Aluminum (Min. length: 200mm)	Magnesium	Option	Coil w/ bumper	35	470	D+V	1.33
SS M6	26"	28.6mm 7050 Aluminum (Min. length: 200mm)	Magnesium	Option	Coil w/ bumper	35	435	D+V	1.18
SS A7	700C	28.6mm 7050 Aluminum (Min. length: 200mm)	Aluminum	Option	Coil w/ bumper	35	455	Disc or D+V	1.60
SS A6	26"	28.6mm 7050 Aluminum (Min. length: 200mm)	Aluminum	Option	Coil w/ bumper	35	435	Disc or D+V	1.52

Notice: The fork height need to add 5mm for preload adjustment (T).

SS A4



SS A2



RF-M7



RF-M6



SS A4 / SS A2-100 / SS A2-75 Suitable for E-BIKE and Pedelec
SS A4 T Suitable for Pedelec only

Model	Wheel Size	Steerer	Lower	Preload Adjustment (T)	Spring	Travel (mm)	Fork Height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
SS A4	24"	28.6mm 7050 Aluminum (Min. length: 200mm)	Aluminum	Option	Coil w/ bumper	30	410	D+V	1.45
SS A2-100	20"	28.6mm 7050 Aluminum (Min. length: 200mm)	Aluminum	-	Coil w/ bumper	30	355	D+V	1.32
SS A2-75	20"	28.6mm 7050 Aluminum (Min. length: 200mm)	Aluminum	-	Coil w/ bumper	30	355	V-brake only	1.28
RF-M7	700C	28.6mm 7050 Aluminum (Min. length: 200mm)	Magnesium	-	-	-	408	D+V	0.83
RF-M6	26"	28.6mm 7050 Aluminum (Min. length: 200mm)	Magnesium	-	-	-	373	D+V	0.75

Notice: The SS A4 fork height need to add 5mm for preload adjustment (T).

BLAZE 29



BLAZE 27.5



BLAZE 26



BLAZE

Model	Steerer	Stanchion	Lower	Spring	Travel (mm)	Fork height (mm)v	Brake Type	Weight(kgs) (w/ 200mm steerer)
BLAZE 29	28.6mm Steel	30mm Steel CP Finish	Aluminum	Coil	80, 100, 120	490 / 510 / 530	Disc or D+V	RL:2.92, TNL:2.84, ML:2.61, T:2.61
BLAZE 27.5	28.6mm Steel	30mm Steel CP Finish	Aluminum	Coil	80, 100, 120, 130	475 / 495 / 515 / 525	Disc only	RL:2.83, TNL:2.76, ML:2.51, T:2.55
BLAZE 26	28.6mm Steel	30mm Steel CP Finish	Aluminum	Coil	80, 100, 120	460 / 480 / 500	Disc or D+V	RL:2.62, TNL:2.55, ML:2.30, T:2.34

*Function Option available: RL: Hydraulic Remote Lockout, TNL: Hydraulic Lockout,
ML: Mechanical Lockout, T: Preload

NEW!

GILA 27.5 / 26



	Model	Steerer	Stanchion	Lower	Spring	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
NEW!	**GILA 27.5**	28.6mm Steel	28.6mm Steel CP Finish	Aluminum	Coil	80, 100	475 / 495	Disc only	RL:2.57, TNL:2.50, ML:2.25 , T:2.20
	GILA 26	28.6mm Steel	28.6mm Steel CP Finish	Aluminum	Coil	80, 100	460 / 480	Disc or D+V	RL:2.42, TNL:2.35, ML:2.10, T:2.05

*Function Option available for GILA 27.5 / 26: RL: Hydraulic Remote Lockout,
TNL: Hydraulic Lockout, ML: Mechanical Lockout, T: Preload

CAPA 26



Model	Steerer	Stanchion	Lower	Spring	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
CAPA 26	28.6 / 25.4mm Steel	25.4mm Steel CP Finish	Aluminum	Coil	80	460	D+V	ML:2.03, T:1.98
CAPA 24	28.6 / 25.4mm Steel	25.4mm Steel CP Finish	Aluminum	Coil	50	399	D+V	ML:1.93, T:1.84
CAPA 20	28.6 / 25.4mm Steel	25.4mm Steel CP Finish	Aluminum	Coil	50	373	D+V	T:1.75

*Function Option available for CAPA 26 / 24:
ML: Mechanical Lockout, T: Preload

*Function Option available for CAPA 20:
T: Preload

SPACE



DIRT



Model	Steerer	Stanchion	Lower	Spring	Adjustment	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
SPACE Jump	28.6mm 7050 Aluminum	36mm 7050 Aluminum Hard Anodize	Magnesium	Air	A,R	80, 100	465 / 485	Disc only	2.63
SPACE Free	28.6mm Cr-mo steel	36mm Steel QPQ black	Magnesium	Coil	R	80, 100	465 / 485	Disc only	2.93
DIRT RA	28.6mm Steel	32 steel CP Finish	Aluminum	Coil	R, P	80, 100, 130	460 / 480 / 510	Disc or D+V	3.01
DIRT T	28.6mm Steel	32 steel CP Finish	Aluminum	Coil	P	80, 100, 130	460 / 480 / 510	Disc or D+V	3.05

*A: Air, R: Rebound, P: Preload

NOVA



NEON



NOVA suitable for E-BIKE and Pedelec

Model	Steerer	Stanchion	Lower	Spring	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
NOVA	28.6 / 25.4mm Steel	28.6mm Steel CP Finish	Aluminum	Coil	700C: 50, 60	700C: 460 / 470	Disc or D+V	RL:2.59, ML:2.30, T:2.31
NEON	28.6 / 25.4mm Steel	25.4mm Steel CP Finish	Aluminum	Coil	700C: 50, 60 26": 75	700C: 460 / 470 26": 465	D+V	RL:2.19, ML:1.95, T:1.94

*Function Option available for NOVA, NEON: RL: Hydraulic Remote Lockout, ML: Mechanical Lockout, T: Preload

VERSE



SOFI



URBAN




VERSE SOFI URBAN

VERSE & URBAN suitable for E-BIKE and Pedelec / SOFI suitable for Pedelec only

Model	Steerer	Stanchion	Lower	Spring	Travel (mm)	Fork height (mm)	Brake Type	Weight(kgs) (w/ 200mm steerer)
VERSE	28.6 / 25.4mm Steel	28.6mm Steel CP Finish	Aluminum	Coil	700C: 40, 50	700C: 450 / 460	V-brake only	RL:2.59, ML:2.30, T:2.31
SOFI	28.6 / 25.4mm Steel	25.4mm Steel CP Finish	Aluminum	Coil	700C: 40, 50 26": 50	700C: 450 / 460 26": 450	V-brake only	RL:2.32, ML:2.06, T:2.07
URBAN	28.6 / 25.4mm Steel	25.4mm Steel CP Finish	Aluminum	Coil	700C: 40	700C: 450	Roller & Disc brake only	RL:2.15, ML:1.86, T:1.87

*Function Option available: RL: Hydraulic Remote Lockout,
ML: Mechanical Lockout, T: Preload

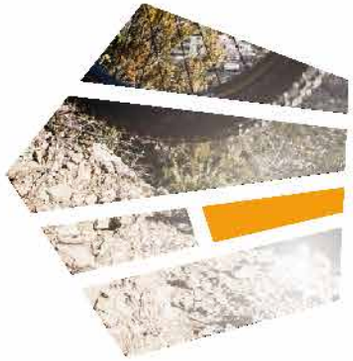

ENJOY
A COMFORTABLE
RIDING

RST
GLOBAL NETWORK

Head quarter
Dah ken Ind. Co., Ltd.

Tel: +886-2-85212351
Fax: +886-2-85216159
Email: rst@rst.com.tw
Http://www.rst.com.tw

Europe

RST Europe Office
Tel: +49-711-2588221
Fax: +49-711-2588402
Email: info@rst-europe.eu

USA

RST USA Service & Distributor
Tel: +1-(661)-360-9946
Email: sales@rstsuspensionusa.com

China

Suzhoun Dawei Precision Co,Ltd
Tel: +86-512-86160698
Fax: +86-512-86160100
Email: services@rst-topway.cn