

RST

2019

PRODUCT **SPEC**

Contents

06 NEW CATEGORY - STEM SHOCK

IIO PLUS

08 ROGUE 110-15 & TITAN 110-15
09 VIBE 110-15
10 F1RST 110-15 & AERIAL 110-15
11 ALPHA 110-15 & ALPHA 110-9

DH/FR/AM

13 REBEL V2
14 KILLAH 29
15 STITCH 29
16 KILLAH 27.5 / 26 & STITCH 27.5 / 26
17 STORM
18 ROGUE & TITAN

FAT BIKE

19 RENEGADE

XC/ATB

21 REVOLT 29-15 & 29
22 REVOLT 27.5-15 & 27.5
23 REVEAL 29-15 & 29
24 REVEAL 27.5-15 & 27.5 / 26
25 F1RST 29-15 & 29
26 F1RST 27.5-15 & 27.5
27 F1RST 26 & PLATINUM
28 AERIAL 29-15
39 AERIAL 29 / 29 R
30 AERIAL 27.5 / 27.5 R & 26 / 26R
31 OMEGA 29
32 OMEGA 27.5 & 26
33 BLAZE 29 & BLAZE 27.5
34 GILA 29 & 27.5
35 GILA 26 & CAPA 29
36 CAPA 27.5 & 26

JUNIOR

38 SNYPER
39 F1RST 24-15 & F1RST 24
40 AERIAL 24 & CAPA 24&20

DIRT JUMP

42 SPACE
43 SLOPE & DIRT

CROSS TREKKING

45 VOGUE & VIVAir
46 VOLANT
47 VITA & PLS
48 NOVA & VERSE
49 NEON & URBAN
50 SS-A7 & A4 / A2
51 SS-M7 / SS-M6
52 RF-M7 & M6

E-CITY

54 PULSE 29-15 & PULSE 29
55 PULSE 27.5-15 & PULSE 27.5
56 VOGUE E & VIVAir E

ADJUST SEATPOST

58 ELEV 8 E
59 ELEV8 H & ELEV8 A


ECONOMIC MODELS

61 DRAGON-32 & ARES 27.5
62 ZEUS PRO / ZEUS& ANGEL
63 ASTERIA 32 & ASTERIA 28.6
64 ASTERIA 26 & ASTERIA PLS
65 MARS-U & GARY
66 PILOT & RIDER

AM

68 AIR CARTRIDGE / PUMP / GREASE
69 SEAL KITS / SPRING SEAL / ADJUSTER
60 WRENCH / CAP / SRL / O-RING
71 DIMENSIONS
72-89 SPEC
91 RST DISTRIBUTORS



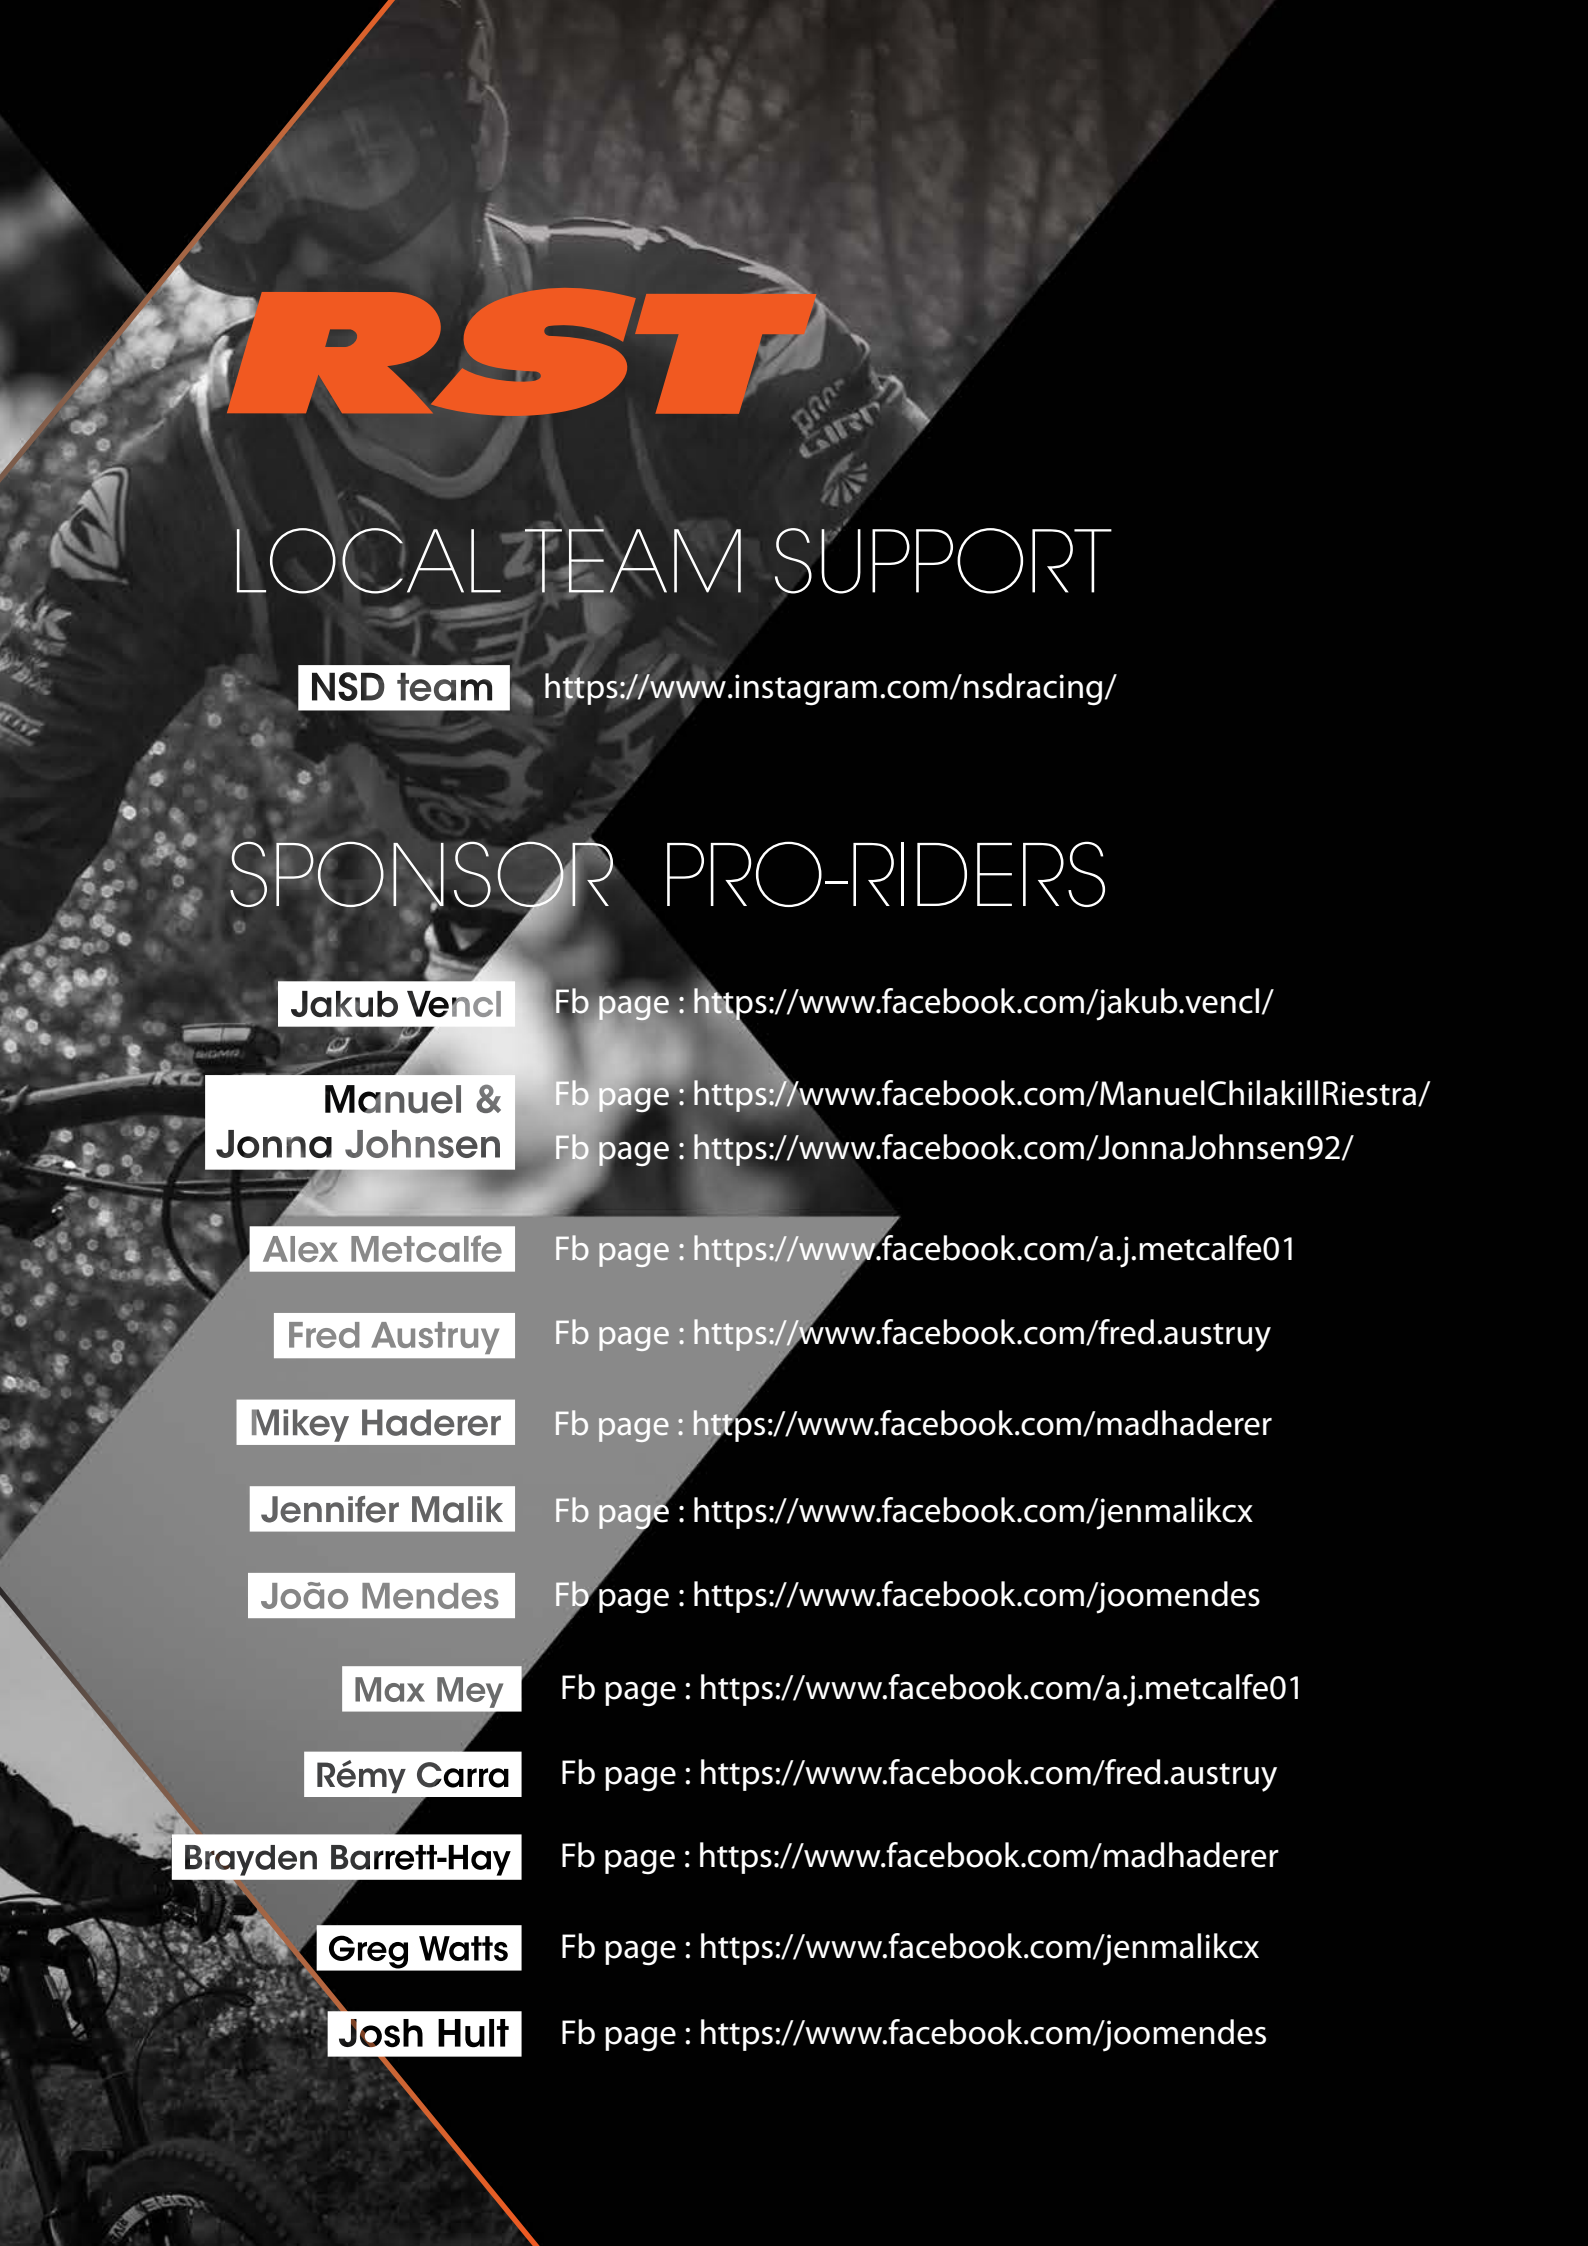

RST

LOCAL TEAM SUPPORT

NSD team https://www.instagram.com/nsdracing/

SPONSOR PRO-RIDERS

Jakub Vencl Fb page : https://www.facebook.com/jakub.vencl/

Manuel & Jonna Johnsen Fb page : https://www.facebook.com/ManuelChilakillRiestra/
Fb page : https://www.facebook.com/JonnaJohnsen92/

Alex Metcalfe Fb page : https://www.facebook.com/a.j.metcalfe01

Fred Austruy Fb page : https://www.facebook.com/fred.austruy

Mikey Haderer Fb page : https://www.facebook.com/madhaderer

Jennifer Malik Fb page : https://www.facebook.com/jenmalikcx

João Mendes Fb page : https://www.facebook.com/joomendes

Max Mey Fb page : https://www.facebook.com/a.j.metcalfe01

Rémy Carra Fb page : https://www.facebook.com/fred.austruy

Brayden Barrett-Hay Fb page : https://www.facebook.com/madhaderer

Greg Watts Fb page : https://www.facebook.com/jenmalikcx

Josh Hult Fb page : https://www.facebook.com/joomendes

Product Overview

	Taiwan-Made Product												China-Made Product			
	$$$$$					$$$$						$$$	$$			
Down Hill		KILLAH														
Free Ride			STITCH			STORM										
All Mountain	REBEL			ROGUE	TITAN											
Fat Bike					RENEGADE											
110-15				ROGUE 110-15	TITAN 110-15	VIBE 110-15				F1RST 110-15		AERIAL 110-15		ALPHA 110-15			
110-9										F1RST 110-9		AERIAL 110-9		ALPHA 110-9		
Xc 29'er							REVOLT 29	REVEAL 29-15	REVEAL 29	F1RST 29-15	F1RST 29	AERIAL 29 R	AERIAL 29	OMEGA 29	BLAZE 29	GILA 29
Xc 27.5							REVOLT 27.5	REVEAL 27.5-15	REVEAL 27.5	F1RST 27.5-15	F1RST 27.5	AERIAL 27.5 R	AERIAL 27.5	OMEGA 27.5	BLAZE 27.5	GILA 27.5
Xc 26									REVEAL 26	F1RST 26	F1RST Platinum	AERIAL 26 R	AERIAL 26	OMEGA 26		GILA 26
Dirt Jump			SPACE	SLOPE										DIRT		
Leisure Sport														CAPA 29	CAPA 27.5	CAPA 26
Junior								SNYPER 24	F1RST 24-15	F1RST 24			AERIAL 24			CAPA 24/20
Cross										VOGUE		VIVAir		VITA	VOLANT	NOVA / NEON
Trekking												Single Shock M series	Single Shock A series			VERSE / URBAN
E-City									VOGUE E	VIVAir E	PULSE Air 29 / 27.5	PULSE Coil 29 / 27.5				
Seatpost				ELEV 8 E				ELEV 8 H				ELEV 8 A				
Stem Shock												STEM SHOCK				

No RST forks are approved for front motor use.

Color Options




DK-0011
GLOSS WHITE
(YS-701)



DK-0012
PEARL WHITE
(YS-775)



DK-8010
MATT BLACK
(YS-727)



DK-8011
SHINY BLACK
(YS-728)

Steerer Weight

Steerer Tube		Lenght	Weight
Aluminum 7050	28.6mm	260mm	176g
Aluminum 7050	1.5''	260mm	205g
Aluminum 7050	1.5'' Taper	260mm	186g
Hi-ten	28.6mm	260mm	326g
Hi-ten	25.4mm	260mm	290g
Hi-ten	1.5'' Taper	260mm	415g



NEW

STEM SHOCK

MODEL	
Adjustable angle	+4°, 0°, -4°
Travel	20mm
Features	Angle adjust spacer option for the stem
Diameter	fit into inner diameter ≥24.4mm steerer
Length	Suspension system will add 50mm of height to the steer tube
Weight (kgs)	0.38



PHOTO CREDIT BY | ENDUROTEAM



ROGUE 110-15

MODEL	Air TRL	Air	Air w/o Lockout
STEERER	1.5" A7050 Aluminum tapered steerer		
CROWN PITCH	150mm		
CROWN	Aluminum Black		
STANCHION	34mm A7050 Aluminum Hard Anodize Black		
CASTING	Magnesium 15x110mm QR		
ADJUSTMENT	A, R, TRL	A, R, L, C	A, R, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring	Hydraulic Compression, Rebound adjust Air Spring
SYSTEM	OCR+(R), Air(L)		
TRAVEL (mm)	120, 130, 140, 150, 160mm		
BRAKE TYPE	Disc Only		
WEIGHT (kgs) (w/ 200mm steerer)	2.35	2.33	2.33

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out

TITAN 110-15

MODEL	Air TRL	Air	Air w/o Lockout
STEERER	1.5" A7050 Aluminum tapered steerer		
CROWN PITCH	150mm		
CROWN	Aluminum Black		
STANCHION	34mm A7050 Aluminum Hard Anodize Black		
CASTING	Magnesium 15x110mm QR		
ADJUSTMENT	A, R, TRL	A, R, L, C	A, R, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring	Hydraulic Compression, Rebound adjust Air Spring
SYSTEM	OCR(R), Air(L)		
TRAVEL (mm)	120, 130, 140, 150mm		
BRAKE TYPE	Disc Only		
WEIGHT (kgs) (w/ 200mm steerer)	2.4	2.38	2.38

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out





NEW E-MTB

VIBE 110-15

MODEL	RA	RL	TNL
STEERER	1.5" Steel tapered steerer		
CROWN PITCH	150mm		
CROWN	Aluminum Black		
STANCHION	34mm Steel QPQ black		
CASTING	Magnesium 15x110mm Thru Bolt Axle		
ADJUSTMENT	R,P	RL, P	L, P
FEATURES	Hydraulic Rebound adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out
SYSTEM	Oil(R), Coil(L)		
TRAVEL (mm)	100, 120, 130, 140mm		
BRAKE TYPE	Disc Only		
WEIGHT (kgs) (w/ 200mm steerer)	3.45	3.54	3.48

*RL: Remote Lock-out, L: Lock-out, P: Preload



F1RST 110-15 / 110-9

MODEL	110-15 Air TRL	110-15 Air	110-9 Air TRL	110-9 Air
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)			
CROWN PITCH	140mm			
CROWN	Aluminum Black			
STANCHION	32mm A7050 Aluminum Hard Anodize Black			
CASTING	Magnesium 15x110mm Thru Bolt Axle		Magnesium 9x110mm Open Dropout	
ADJUSTMENT	A, R, TRL	A, R, L, C	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)			
TRAVEL (mm)	29" / 27.5"+: 80, 100, 120mm		29" / 27.5"+: 80, 100, 120mm 27.5" / 26": 80, 100, 120mm	
BRAKE TYPE	Disc Only			
WEIGHT (kgs) (w/ 200mm steerer)	2.12	2.10	1.95	1.93

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out

AERIAL 110-15 / 110-9

MODEL	110-15 RL	110-15 TNL	110-15 MLC	110-9 RL	110-9 TNL	110-9 MLC
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)					
CROWN PITCH	140mm					
CROWN	Aluminum Black					
STANCHION	32mm Steel QPQ black					
CASTING	Magnesium 15x110mm Thru Bolt Axle			Magnesium 9x110mm Open Dropout		
ADJUSTMENT	A, RL	A, L	A, L	A, RL	A, L	A, L
FEATURES	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring	Mechanical Lock-out Air Spring	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring	Mechanical Lock-out, Air Spring
SYSTEM	Oil(R), Air(L)		Air(L)	Oil(R), Air(L)		Air(L)
TRAVEL (mm)	80, 100, 120mm					
BRAKE TYPE	Disc Only					
WEIGHT (kgs) (w/ 200mm steerer)	2.55	2.47	2.27	2.38	2.30	2.10

*A: Air, R: Rebound, C: Compression, RL: Remote Lock-out, L: Lock-out



ALPHA 110-15

MODEL	RL	TNL	RA	MLC	T
STEERER	28.6mm Steel (Optional 1.5" Steel tapered steerer)				
CROWN PITCH	140mm				
CROWN	Aluminum Black				
STANCHION	32mm Steel Ti Color				
CASTING	Magnesium 15x110mm Thru Bolt Axle				
ADJUSTMENT	RL, P	L, P	R, P	L, P	P
FEATURES	Hydraulic Remote, Lock-Out	Hydraulic Lock-Out	Hydraulic Rebound adjust	Mechanical Lock-Out	-
SYSTEM	Oil(R), Coil(L)			Coil	
TRAVEL (mm)	29" / 27.5+: 80, 100, 120, 130, 135mm				
BRAKE TYPE	Disc Only				
WEIGHT (kgs) (w/ 200mm steerer)	2.65	2.57	2.54	2.34	2.34

*RL: Remote Lock-out, L: Lock-out, P: Preload, R: Rebound





ALPHA 110-9

MODEL	RL	TNL	RA	MLC	T
STEERER	28.6mm Steel (Optional 1.5" Steel tapered steerer)				
CROWN PITCH	140mm				
CROWN	Aluminum Black				
STANCHION	32mm Steel Ti Color				
CASTING	Magnesium 9x110mm Open Dropout				
ADJUSTMENT	RL, P	L, P	R, P	L, P	P
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Hydraulic Rebound adjust	Mechanical Lock-out	-
SYSTEM	Oil(R), Coil(L)			Coil	
TRAVEL (mm)	29" / 27.5+ : 80, 100, 120, 130, 140mm 27.5" / 26" : 80, 100, 120, 130, 140mm				
BRAKE TYPE	Disc Only				
WEIGHT (kgs) (w/ 200mm steerer)	2.46	2.4	2.37	2.17	2.17

*RL: Remote Lock-out, L: Lock-out, P: Preload, R: Rebound



DH / FR / AM

Steep descents and technical terrain require top-performance from both riders and their equipment.

Durable construction without a major weight penalty and high performance damping systems distinguish these forks ready for the trail, bike park, even a World Cup course.

PHOTO CREDIT BY | ENDUROTEAM



NEW

REBEL V2

MODEL	Air TRL	Air	Air w/o Lockout
STEERER	1.5" A7050 Aluminum tapered steerer		
CROWN PITCH	140mm		
CROWN	Aluminum Black		
STANCHION	32mm A7050 Aluminum Hard Anodize Black		
CASTING	Magnesium 20x110mm Boost Thru Bolt Axle (Optional 15x110 Thru Bolt Axle)		
ADJUSTMENT	A, R, TRL	A, R, L, C	A, R, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring	Hydraulic Compression, Rebound adjust Air Spring
SYSTEM	OCR+(R), Air(L)		
TRAVEL (mm)	29": 80, 100, 130mm 27.5"+: 100, 130, 140, 150mm		
BRAKE TYPE	Disc Only		
WEIGHT (kgs) (w/ 200mm steerer)	29":2.25 27.5":2.35	29":2.23 27.5":2.33	29":2.23 27.5":2.33

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out



NEW

KILLAH 29

MODEL	
STEERER	28.6mm A7050 Aluminum
CROWN PITCH	145mm-Dual
CROWN	Aluminum Black
STANCHION	38mm A7050 Aluminum Hard Anodize Black
CASTING	Magnesium 20x110mm Boost Thru Bolt Axle
ADJUSTMENT	R, C
FEATURES	Hydraulic Compression, Rebound adjust
SYSTEM	OCR+(R), Coil(L)
TRAVEL (mm)	200mm
BRAKE TYPE	Disc Only
WEIGHT (kgs) (w/ 200mm steerer)	29": 3.00

*R: Rebound, C: Compression



NEW

STITCH 29

MODEL	AIR	COIL
STEERER	1.5" A7050 Aluminum tapered steerer	
CROWN PITCH	145mm	
CROWN	Aluminum Black	
STANCHION	38mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 20x110mm Boost Thru Bolt Axle (Optional 15x110 Thru Bolt Axle)	
ADJUSTMENT	A, R, C	R, C
FEATURES	Hydraulic Compression, Rebound adjust, Air Spring	Hydraulic Compression, Rebound adjust
SYSTEM	OCR+(R), Air(L)	OCR+(R), Coil(L)
TRAVEL (mm)	160, 170, 180mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	2.58	2.89

*A: Air, R: Rebound, C: Compression



KILLAH 27.5 / 26

MODEL	
STEERER	28.6mm A7050 Aluminum
CROWN PITCH	138mm-Dual
CROWN	Aluminum Black
STANCHION	36mm A7050 Aluminum Hard Anodize Black
CASTING	Magnesium 20mm Thru Bolt Axle
ADJUSTMENT	R, C
FEATURES	Hydraulic Compression, Rebound adjust
SYSTEM	OCR+(R), Coil(L)
TRAVEL (mm)	200mm
BRAKE TYPE	Disc Only
WEIGHT (kgs) (w/ 200mm steerer)	27.5": 3.22 26": 3.20

*R: Rebound, C: Compression

STITCH 27.5 / 26

MODEL	AIR	COIL
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	138mm	
CROWN	Aluminum Black	
STANCHION	36mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 20mm QR	
ADJUSTMENT	A, R, C	R, C
FEATURES	Hydraulic Compression, Rebound adjust, Air Spring	Hydraulic Compression, Rebound adjust
SYSTEM	OCR+(R), Air(L)	OCR+(R), Coil(L)
TRAVEL (mm)	160, 170, 180mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	27.5": 2.28 26": 2.26	27.5": 2.57 26": 2.55

*A: Air, R: Rebound, C: Compression





STORM

MODEL	RA
STEERER	28.6mm Cr-mo Steel (Optional 1.5" Aluminum tapered steerer)
CROWN PITCH	138mm
CROWN	Aluminum Black
STANCHION	36mm Steel QPQ Black
CASTING	Magnesium 20mm QR
ADJUSTMENT	R
FEATURES	Hydraulic, Rebound adjust
SYSTEM	Oil(R), Coil(L)
TRAVEL (mm)	160, 170, 180mm
BRAKE TYPE	Disc Only
WEIGHT (kgs) (w/ 200mm steerer)	27.5": 3.34 26": 3.32

*R: Rebound



ROGUE

MODEL	Air TRL	Air	Air w/o Lockout
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)		
CROWN PITCH	130mm		
CROWN	Aluminum Black		
STANCHION	34mm A7050 Aluminum Hard Anodize Black		
CASTING	Magnesium 15mm QR		
ADJUSTMENT	A, R, TRL	A, R, L, C	A, R, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Air Spring
SYSTEM	OCR+(R), Air(L)		
TRAVEL (mm)	140, 150, 160mm		
BRAKE TYPE	Disc Only		
WEIGHT (kgs) (w/ 200mm steerer)	27.5": 2.13 26": 2.00	27.5": 2.11 26": 1.98	27.5": 2.11 26": 1.98

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out

TITAN

MODEL	Air TRL	Air	Air w/o Lockout
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)		
CROWN PITCH	130mm		
CROWN	Aluminum Black		
STANCHION	34mm A7050 Aluminum Hard Anodize Black		
CASTING	Magnesium 15mm QR		
ADJUSTMENT	A, R, TRL	A, R, L, C	A, R, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Air Spring
SYSTEM	OCR(R), Air(L)		
TRAVEL (mm)	140, 150mm		
BRAKE TYPE	Disc Only		
WEIGHT (kgs) (w/ 200mm steerer)	27.5": 2.18 26": 2.05	27.5": 2.16 26": 2.03	27.5": 2.16 26": 2.03

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out





RENEGADE

MODEL	Air TRL	Air
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	190mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 15mm QR	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	80, 100, 120mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	2.22	2.20

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out



XC / ATB

Lightweight and efficient suspension from 80mm to 120mm distinguish the XC and touring lineups. Forks with a perfectly balanced mixture of comfort, performance and trail control ready for enjoying your local trail network to competing in the toughest race events.

PHOTO CREDIT | Lee Cougan Team

REVOLT 29-15

MODEL	29-15 TRL	29-15
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 15mm QR	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	130, 140mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	2.05	2.03

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out





REVOLT 29

MODEL	29 TRL	29
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 9mm Open Dropout	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	130, 140mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	1.91	1.89

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out



REVOLT 27.5-15

MODEL	27.5-15 TRL	27.5-15
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 15mm QR	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	130, 140mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	2.03	2.01

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out

REVOLT 27.5

MODEL	27.5 TRL	27.5
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 9mm Open Dropout	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	130, 140mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	1.89	1.87

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out



REVEAL 29-15

MODEL	29-15 TRL	29-15
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 15mm QR	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCRC(R), Air(L)	
TRAVEL (mm)	80, 100, 120mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	1.82	1.80

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out





REVEAL 29

MODEL	29 TRL	29
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 9mm Open Dropout	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCRC(R), Air(L)	
TRAVEL (mm)	80, 100, 120mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	1.63	1.61

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out



REVEAL 27.5-15

MODEL	27.5-15 TRL	27.5-15
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 15mm QR	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR+(R), Air(L)	
TRAVEL (mm)	80, 100, 120mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	1.78	1.76

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out

REVEAL 27.5 & 26

MODEL	27.5 TRL	27.5	26 TRL	26
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)			
CROWN PITCH	130mm			
CROWN	Aluminum Black			
STANCHION	32mm A7050 Aluminum Hard Anodize Black			
CASTING	Magnesium 9mm Open Dropout			
ADJUSTMENT	A, R, TRL	A, R, L, C	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR+(R), Air(L)		OCRC(R), Air(L)	
TRAVEL (mm)	80, 100, 120mm			
BRAKE TYPE	Disc Only		Disc or Disc & V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	1.65	1.63	1.53	1.51

*A: Air, R: Rebound, C: Compression, RL: Remote Lock-out, L: Lock-out



F1RST 29-15

MODEL	29-15 TRL	29-15
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 15mm QR	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	80, 100, 120mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	2.15	2.13

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out





F1RST 29

MODEL	29 TRL	29
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 9mm Open Dropout	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	80, 100, 120mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	1.96	1.94

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out



F1RST 27.5-15

MODEL	27.5-15 TRL	27.5-15
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 15mm QR	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	80, 100, 120mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	2.00	1.98

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out

F1RST 27.5

MODEL	27.5 TRL	27.5
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 9mm Open Dropout	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	80, 100, 120mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	1.88	1.86

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out



F1RST 26

MODEL	26 TRL	26
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 9mm Open Dropout	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	80, 100, 120mm	
BRAKE TYPE	Disc or Disc & V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	1.82	1.80

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out





F1RST PLATINUM

MODEL	Platinum TRL	Platinum
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	30mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 9mm Open Dropout	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	80, 100mm	
BRAKE TYPE	Disc or D+V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	1.52	1.50

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out



NEW

AERIAL 29-15

MODEL	RL	TNL	MLC
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)		
CROWN PITCH	130mm		
CROWN	Aluminum Black		
STANCHION	32mm Steel QPQ Black		
CASTING	Magnesium 15mm QR		
ADJUSTMENT	A, RL	A, L	A, L
FEATURES	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring	Mechanical Lock-out, Air Spring
SYSTEM	Oil(R), Air(L)		Air(L)
TRAVEL (mm)	80, 100, 120mm		
BRAKE TYPE	Disc Only		
WEIGHT (kgs) (w/ 200mm steerer)	2.34	2.28	2.05

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out



AERIAL 29/29R

MODEL	RL-R	TNL-R	RL	TNL	MLC
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)				
CROWN PITCH	130mm				
CROWN	Aluminum Black				
STANCHION	32mm Steel QPQ black				
CASTING	Magnesium 9mm Open Dropout				
ADJUSTMENT	A, R, RL	A, R, L	A, RL	A, L	A, L
FEATURES	Hydraulic Rebound Adjust, Remote Lock-out, Air Spring	Hydraulic Rebound Adjust, Lock-out, Air Spring	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring	Mechanical Lock-out, Air Spring
SYSTEM	Oil(R), Air(L)				Air(L)
TRAVEL (mm)	80, 100, 120mm				
BRAKE TYPE	Disc Only				
WEIGHT (kgs) (w/ 200mm steerer)	2.40	2.34	2.34	2.28	2.05

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out



AERIAL 27.5 / 27.5R

MODEL	RL-R	TNL-R	RL	TNL	MLC
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)				
CROWN PITCH	130mm				
CROWN	Aluminum Black				
STANCHION	32mm Steel QPQ black				
CASTING	Magnesium 9mm Open Dropout				
ADJUSTMENT	A, R, RL	A, R, L	A, RL	A, L	A, L
FEATURES	Hydraulic Rebound Adjust Remote Lock-out, Air Spring	Hydraulic Rebound Adjust Lock-out, Air Spring	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring	Mechanical Lock-out, Air Spring
SYSTEM	Oil(R), Air(L)				Air(L)
TRAVEL (mm)	80, 100, 120mm				
BRAKE TYPE	Disc Only				
WEIGHT (kgs) (w/ 200mm steerer)	2.42	2.36	2.26	2.20	2.00

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out

AERIAL 26 / 26R

MODEL	RL-R	TNL-R	RL	TNL	MLC
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)				
CROWN PITCH	130mm				
CROWN	Aluminum Black				
STANCHION	32mm Steel QPQ black				
CASTING	Magnesium 9mm Open Dropout				
ADJUSTMENT	A, R, RL	A, R, L	A, RL	A, L	A, L
FEATURES	Hydraulic Rebound Adjust Remote Lock-out, Air Spring	Hydraulic Rebound Adjust Lock-out, Air Spring	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring	Mechanical Lock-out, Air Spring
SYSTEM	Oil(R), Air(L)				Air(L)
TRAVEL (mm)	80, 100, 120mm				
BRAKE TYPE	Disc or Disc & V-brake				
WEIGHT (kgs) (w/ 200mm steerer)	2.37	2.31	2.31	2.25	2.02

*A: Air, R: Rebound, RL: Remote Lock-out, L: Lock-out





OMEGA 29

MODEL	RA	RL	TNL	MLC	T
STEERER	28.6mm Steel (Optional 1.5" Steel tapered steerer)				
CROWN PITCH	130mm				
CROWN	Aluminum Black				
STANCHION	32mm Steel Ti Color				
CASTING	Magnesium 9mm Open Dropout				
ADJUSTMENT	R,P (easy preload)	RL, P (easy preload)	L, P (easy preload)	L, P (easy preload)	P (easy preload)
FEATURES	Hydraulic Rebound adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	-
SYSTEM	Oil(R), Coil(L)			Coil	
TRAVEL (mm)	80, 100, 120mm				
BRAKE TYPE	Disc Only				
WEIGHT (kgs) (w/ 200mm steerer)	2.44	2.55	2.47	2.24	2.24

*RL: Remote Lock-out, L: Lock-out, P: Preload, R: Rebound



OMEGA 27.5

MODEL	RA	RL	TNL	MLC	T
STEERER	28.6mm Steel (Optional 1.5" Steel tapered steerer)				
CROWN PITCH	130mm				
CROWN	Aluminum Black				
STANCHION	32mm Steel Ti Color				
CASTING	Magnesium 9mm Open Dropout				
ADJUSTMENT	R,P (easy preload)	RL, P (easy preload)	L, P (easy preload)	L, P (easy preload)	P (easy preload)
FEATURES	Hydraulic Rebound adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	-
SYSTEM	Oil(R), Coil(L)			Coil	
TRAVEL (mm)	80, 100, 120mm				
BRAKE TYPE	Disc Only				
WEIGHT (kgs) (w/ 200mm steerer)	2.27	2.36	2.30	2.07	2.07

*RL: Remote Lock-out, L: Lock-out, P: Preload

OMEGA 26

MODEL	RA	RL	TNL	MLC	T
STEERER	28.6mm Steel (Optional 1.5" Steel tapered steerer)				
CROWN PITCH	130mm				
CROWN	Aluminum Black				
STANCHION	30mm Steel Ti color				
CASTING	Magnesium 9mm Open Dropout				
ADJUSTMENT	R,P (easy preload)	RL, P (easy preload)	L, P (easy preload)	L, P (easy preload)	P (easy preload)
FEATURES	Hydraulic Rebound adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	-
SYSTEM	Oil(R), Coil(L)			Coil	
TRAVEL (mm)	80, 100, 120mm				
BRAKE TYPE	Disc or Disc & V-brake				
WEIGHT (kgs) (w/ 200mm steerer)	2.34	2.44	2.37	2.11	2.11

*RL: Remote Lock-out, L: Lock-out, P: Preload



BLAZE 29

MODEL	RA	RL	TNL	MLC	T
STEERER	28.6mm Steel (Optional 1.5" Steel tapered steerer)				
CROWN PITCH	130mm				
CROWN	Aluminum Black				
STANCHION	30mm Steel CP Finish				
CASTING	Aluminum 9mm Open Dropout				
ADJUSTMENT	R,P	RL, P	L, P	L, P	P
FEATURES	Hydraulic Rebound adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	-
SYSTEM	Oil(R), Coil(L)			Coil	
TRAVEL (mm)	80, 100, 120mm				
BRAKE TYPE	Disc Only				
WEIGHT (kgs) (w/ 200mm steerer)	2.81	2.9	2.84	2.61	2.61

*RL: Remote Lock-out, L: Lock-out, P: Preload





BLAZE 27.5

MODEL	RA	RL	TNL	MLC	T
STEERER	28.6mm Steel				
CROWN PITCH	130mm				
CROWN	Aluminum Black				
STANCHION	30mm Steel CP Finish				
CASTING	Aluminum 9mm Open Dropout				
ADJUSTMENT	R,P	RL, P	L, P	L, P	P
FEATURES	Hydraulic Rebound adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	-
SYSTEM	Oil(R), Coil(L)			Coil	
TRAVEL (mm)	80, 100, 120, 130mm				
BRAKE TYPE	Disc Only				
WEIGHT (kgs) (w/ 200mm steerer)	2.73	2.82	2.76	2.51	2.55

*RL: Remote Lock-out, L: Lock-out, P: Preload



GILA 29

MODEL	RL	TNL	MLC	T
STEERER	28.6mm Steel			
CROWN PITCH	130mm			
CROWN	Aluminum Black			
STANCHION	28.6mm Steel CP Finish			
CASTING	Aluminum 9mm Open Dropout			
ADJUSTMENT	RL, P	L, P	L, P	P
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	–
SYSTEM	Oil(R), Coil(L)		Coil	
TRAVEL (mm)	80, 100, 120mm			
BRAKE TYPE	Disc Only		Coil	
WEIGHT (kgs) (w/ 200mm steerer)	2.70	2.64	2.41	2.36

*RL: Remote Lock-out, L: Lock-out, P: Preload



GILA 27.5

MODEL	RL	TNL	MLC	T
STEERER	28.6mm Steel			
CROWN PITCH	125mm			
CROWN	Aluminum Black			
STANCHION	28.6mm Steel CP Finish			
CASTING	Aluminum 9mm Open Dropout			
ADJUSTMENT	RL, P	L, P	L, P	P
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	–
SYSTEM	Oil(R), Coil(L)		Coil	
TRAVEL (mm)	80, 100mm			
BRAKE TYPE	Disc or Disc & V-brake			
WEIGHT (kgs) (w/ 200mm steerer)	2.50	2.44	2.19	2.14

*RL: Remote Lock-out, L: Lock-out, P: Preload

GILA 26

MODEL	RL	TNL	MLC	T
STEERER	28.6mm Steel			
CROWN PITCH	125mm			
CROWN	Aluminum Black			
STANCHION	28.6mm Steel CP Finish			
CASTING	Aluminum 9mm Open Dropout			
ADJUSTMENT	RL, P	L, P	L, P	P
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	–
SYSTEM	Oil(R), Coil(L)			
TRAVEL (mm)	80, 100mm			
BRAKE TYPE	Disc or Disc & V-brake			
WEIGHT (kgs) (w/ 200mm steerer)	2.41	2.35	2.10	2.05

*RL: Remote Lock-out, L: Lock-out, P: Preload





CAPA 29 NEW

MODEL	MLC	T
STEERER	28.6mm Steel	
CROWN PITCH	125mm	
CROWN	Aluminum Black	
STANCHION	25.4mm Steel CP Finish	
CASTING	Aluminum 9mm Open Dropout	
ADJUSTMENT	L, P	P
FEATURES	Mechanical Lock-Out	–
SYSTEM	Coil	
TRAVEL (mm)	60, 80mm	
BRAKE TYPE	Disc or Disc & V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	2.03	1.98

*L: Lock-out, P: Preload



CAPA 27.5 NEW

MODEL	MLC	T
STEERER	28.6mm Steel	
CROWN PITCH	125mm	
CROWN	Aluminum Black	
STANCHION	25.4mm Steel CP Finish	
CASTING	Aluminum 9mm Open Dropout	
ADJUSTMENT	L, P	P
FEATURES	Mechanical Lock-Out	–
SYSTEM	Coil	
TRAVEL (mm)	60, 80mm	
BRAKE TYPE	Disc or Disc & V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	2.03	1.98

*L: Lock-out, P: Preload



CAPA 26

MODEL	MLC	T
STEERER	28.6 / 25.4mm Steel	
CROWN PITCH	120mm	
CROWN	Aluminum Black	
STANCHION	25.4mm Steel CP Finish	
CASTING	Aluminum 9mm Open Dropout	
ADJUSTMENT	L, P	P
FEATURES	Mechanical Lock-Out	–
SYSTEM	Coil	
TRAVEL (mm)	80mm	
BRAKE TYPE	Disc or Disc & V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	2.03	1.98


JUNIOR
100%
MAXXIS

SNYPER

MODEL	24 TRL	24
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 9mm Open Dropout	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	60, 70, 80, 100, 120mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	1.87	1.85

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out



F1RST 24-15

MODEL	24-15 TRL	24-15
STEERER	28.6mm 7050 Aluminum (Optional 1.5"Aluminum steerer tube)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	30mm 7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 15mm QR	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	80, 100, 120mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	1.92	1.90

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out





F1RST 24

MODEL	24 TRL	24
STEERER	28.6mm A7050 Aluminum	
CROWN PITCH	125mm	
CROWN	Aluminum Black	
STANCHION	28.6mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 9mm Open Dropout	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	60mm	
BRAKE TYPE	Disc & V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	1.62	1.60

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out



AERIAL 24

MODEL	RL	TNL	MLC
STEERER	28.6mm A7050 Aluminum		
CROWN PITCH	125mm		
CROWN	Aluminum Black		
STANCHION	28.6mm Steel QPQ black		
CASTING	Magnesium 9mm Open Dropout		
ADJUSTMENT	A, RL	A, L	A, L
FEATURES	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring	Mechanical Lock-out, Air Spring
SYSTEM	Oil(R), Air(L)		Air
TRAVEL (mm)	60mm		
BRAKE TYPE	Disc & V-brake		
WEIGHT (kgs) (w/ 200mm steerer)	1.99	1.93	1.73

*A: Air, RL: Remote Lock-out, L: Lock-out

CAPA 24&20

MODEL	MLC 24	T24, T20
STEERER	28.6 / 25.4mm Steel	
CROWN PITCH	120mm	
CROWN	Aluminum Black	
STANCHION	25.4mm Steel CP Finish	
CASTING	Aluminum 9mm Open Dropout	
ADJUSTMENT	L, P	P
FEATURES	Mechanical Lock-Out	–
SYSTEM	Coil	
TRAVEL (mm)	50mm	
BRAKE TYPE	Disc or Disc & V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	1.93	T24": 1.84 T20": 1.75

*L: Lock-out, P: Preload





DIRT JUMP

The fork series for DIRT riders - Increased durability and ready for air time. Tough, short travel design combined with a top performing damping system make for forks ready to take on the toughest lines on the planet.

PHOTO CREDIT BY | ROSE Rad @RichKPhotography

SPACE

MODEL	Jump	Free
STEERER	28.6mm A7050 Aluminum	28.6mm Cr-mo Steel
CROWN PITCH	138mm	
CROWN	Aluminum Black	
STANCHION	36mm A7050 Aluminum Hard Anodize Black	36mm Steel QPQ black
CASTING	Magnesium 20mm Thru Bolt Axle	
ADJUSTMENT	A, R	R
FEATURES	Hydraulic Rebound adjust, Air Spring	Hydraulic Rebound adjust
SYSTEM	Oil(R), Air(L)	Oil(R), Coil(L)
TRAVEL (mm)	80, 100mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	2.63	2.93

*A: Air, R: Rebound



SLOPE

MODEL	
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)
CROWN PITCH	130mm
CROWN	Aluminum Black
STANCHION	34mm A7050 Aluminum Hard Anodize Black
CASTING	Magnesium 15mm QR
ADJUSTMENT	A, R, C
FEATURES	Hydraulic Compression, Rebound adjust, Air Spring
SYSTEM	OCR+(R), Air(L)
TRAVEL (mm)	80, 100, 130mm
BRAKE TYPE	Disc Only
WEIGHT (kgs) (w/ 200mm steerer)	27.5": 2.00 26": 1.98

*A: Air, R: Rebound, C: Compression





DIRT

MODEL	RA	T
STEERER	28.6mm Steel	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm Steel CP Finish	
CASTING	Aluminum 9mm Open Dropout	
ADJUSTMENT	R, P	P
FEATURES	Hydraulic Rebound adjust	–
SYSTEM	Oil(R), Coil(L)	Coil
TRAVEL (mm)	80, 100, 130mm	
BRAKE TYPE	Disc or Disc & V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	3.01	3.05

*R: Rebound, P: Preload



CROSS TREKKING

Comfortable forks for touring and city bikes with travel around 50mm. Efficient suspension forks that include mounting options that allow use of integrated lights, fenders, dynamos and even roller brake use. Carefree technical systems allow convenient daily use.

VOGUE NEW

MODEL	Air TRL	Air
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	120mm	
CROWN	Aluminum Black	
STANCHION	28.6mm A7050 Aluminum Hard Anodize Black	
CASTING	Magnesium 9mm Open Dropout	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	50, 60, 80mm	
BRAKE TYPE	Disc or Disc & V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	1.80	1.78

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out





VIV Air NEW

MODEL	RL	TNL
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	120mm	
CROWN	Aluminum Black	
STANCHION	28.6mm Steel QPQ Color	
CASTING	Magnesium 9mm Open Dropout	
ADJUSTMENT	A, RL	A, L
FEATURES	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring
SYSTEM	Oil(R), Air(L)	
TRAVEL (mm)	50, 60, 80mm	
BRAKE TYPE	Disc or Disc & V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	2.23	2.17

*A: Air, RL: Remote Lock-out, L: Lock-out

VOLANT

MODEL	RL	TNL	MLC	T
STEERER	28.6mm Steel (Optional 1.5" Steel tapered steerer or 1.5" Aluminum tapered steerer)			
CROWN PITCH	130mm			
CROWN	Aluminum Black			
STANCHION	30mm Steel CP Finish			
CASTING	Aluminum 9mm Open Dropout			
ADJUSTMENT	RL, P	L, P	L, P	P
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	–
SYSTEM	Oil(R), Coil(L)		Coil	
TRAVEL (mm)	50, 60, 80mm			
BRAKE TYPE	Disc or Disc & V-brake			
WEIGHT (kgs) (w/ 200mm steerer)	2.80	2.74	2.51	2.51

*A: Air, L: Lock-out, P: Preload




VITA NEW

MODEL	RL	TNL	MLC	T
STEERER	28.6mm Steel (Optional 1.5" Aluminum tapered steerer)			
CROWN PITCH	120mm			
CROWN	Aluminum Black			
STANCHION	28.6mm Steel CP Finish			
CASTING	Magnesium 9mm Open Dropout			
ADJUSTMENT	RL, P (easy preload),	L, P (easy Preload)	L, P (easy preload)	P (easy preload)
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	–
SYSTEM	Oil(R), Coil(L)		Coil	
TRAVEL (mm)	50, 60, 80mm			
BRAKE TYPE	Disc or Disc & V-brake			
WEIGHT (kgs) (w/ 200mm steerer)	2.41	2.35	2.13	2.13


*RL: Remote Lock-out, L: Lock-out, P: Preload



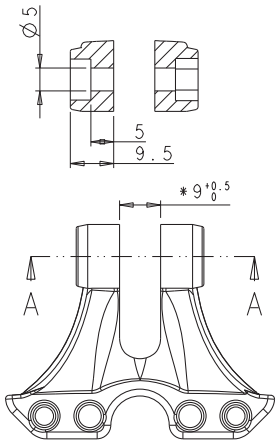

#M5GACC0921 (M5*1.0)

#M5GACC0921 for TRELOCK and BASTA using

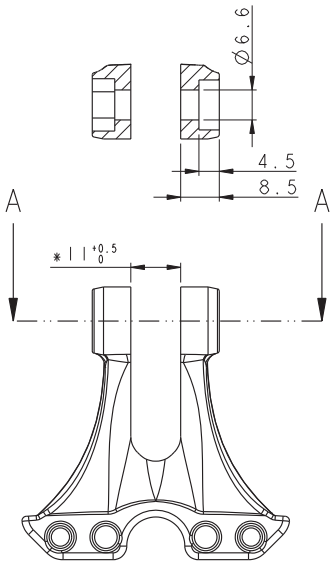

#M5GACX0109-01 (M6*1.0)

#M5GACX0109-01 for BUMM using

POST LIGHTING SYSTEM INFO.

Front Light Maker	RST Bracket Part	Available Model
BUMM	M5GACX0109-01 (using M6 Screw)	LUMOTEC Classic LUMOTEC Lyt B LUMOTEC LYT LUMOTEC IQ Fly(T) LUMOTEC IQ Cyo(T) LUMOTEC rund LUMOTEC Retro LUMOTEC oval
BASTA	M5GACC0921 (using M5Screw)	Sprint
TRELOCK	M5GACC0921 (using M5 Screw)	LS 850 series / LS 870series / Bird series



NOVA

MODEL	RL	TNL	MLC	T
STEERER	28.6mm Steel			
CROWN PITCH	112mm			
CROWN	Aluminum Black			
STANCHION	28.6mm Steel CP Finish			
CASTING	Aluminum 9mm Open Dropout			
ADJUSTMENT	RL, P	L, P	L, P	P
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	–
SYSTEM	Oil(R), Coil(L)		Coil	
TRAVEL (mm)	50, 60mm			
BRAKE TYPE	Disc or Disc & V-brake			
WEIGHT (kgs) (w/ 200mm steerer)	2.62	2.56	2.35	2.36

*RL: Remote Lock-out, L: Lock-out, P: Preload

VERSE

MODEL	RL	TNL	MLC	T
STEERER	28.6 / 25.4mm Steel			
CROWN PITCH	112mm			
CROWN	Aluminum Black			
STANCHION	28.6mm Steel CP Finish			
CASTING	Aluminum 9mm Open Dropout			
ADJUSTMENT	RL, P	L, P	L, P	P
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	–
SYSTEM	Oil(R), Coil(L)		Coil	
TRAVEL (mm)	40, 50mm			
BRAKE TYPE	V-brake only			
WEIGHT (kgs) (w/ 200mm steerer)	2.57	2.51	2.30	2.31

*RL: Remote Lock-out, L: Lock-out, P: Preload



NEON

MODEL	RL	TNL	MLC	T
STEERER	28.6 / 25.4mm Steel			
CROWN PITCH	112mm			
CROWN	Aluminum Black			
STANCHION	25.4mm Steel CP Finish			
CASTING	Aluminum 9mm Open Dropout			
ADJUSTMENT	RL, P	L, P	L, P	P
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	–
SYSTEM	Oil(R), Coil(L)		Coil	
TRAVEL (mm)	50, 60mm			
BRAKE TYPE	Disc or Disc & V-brake			
WEIGHT (kgs) (w/ 200mm steerer)	2.17	2.11	1.95	1.94

*RL: Remote Lock-out, L: Lock-out, P: Preload





URBAN

MODEL	RL	TNL	MLC	T
STEERER	28.6 / 25.4mm Steel			
CROWN PITCH	112mm			
CROWN	Aluminum Black			
STANCHION	25.4mm Steel CP Finish			
CASTING	Aluminum 9mm Open Dropout			
ADJUSTMENT	RL, P	L, P	L, P	P
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	–
SYSTEM	Oil(R), Coil(L)		Coil	
TRAVEL (mm)	40mm			
BRAKE TYPE	Roller& Disc brake only, No V-brake available			
WEIGHT (kgs) (w/ 200mm steerer)	2.13	2.07	1.86	1.87

*RL: Remote Lock-out, L: Lock-out, P: Preload



SS-A7 NEW

MODEL	SS-A7 T	SS-A7
WHEEL SIZE	700x50C	
TRAVEL (mm)	30mm	35mm
FEATURES	Alu. Blade Spring Preload	Alu. Blade
STEERER	28.6mm A7050 Aluminum (Optional 1.5" Aluminum tapered steerer) (Min. Length: 210mm for T version & 210mm for w/o T version)	
LOWER	Aluminum 9mm Open Dropout	
BRAKE TYPE	Disc or Disc + V-brake (Optional Roller Mount)	
WEIGHT (kgs) (w/ 200mm steerer)	1.70	1.70

SS-A4 & A2

MODEL	SS-A4 T	SS-A4	SS-A2-100	SS-A2-75
WHEEL SIZE	24"		20"	
TRAVEL (mm)	30mm	35mm	30mm	30mm
FEATURES	Alu. Blade Spring Preload	Alu. Blade	Alu. Blade (Straight)	Alu. Blade (Curve)
STEERER	28.6mm A7050 Aluminum (Min. Length: 210mm for T version & 210mm for w/o T version)			
LOWER	Aluminum 9mm Open Dropout			
BRAKE TYPE	Disc + V-brake			V-brake
WEIGHT (kgs) (w/ 200mm steerer)	1.45	1.45	1.32	1.28





SS-M7 & M6

MODEL	SS-M7 T	SS-M7	SS-M6 T	SS-M6
WHEEL SIZE	700C		26"	
TRAVEL (mm)	30mm	35mm	30mm	35mm
FEATURES	Mag. Blade Spring Preload	Mag. Blade	Mag. Blade Spring Preload	Mag. Blade
STEERER	28.6mm A7050 Aluminum (Min. Length: 210mm for T version & 210mm for w/o T version)			
LOWER	Aluminum 9mm Open Dropout			
BRAKE TYPE	Disc + V-brake (Optional Roller Mount)			
WEIGHT (kgs) (w/ 200mm steerer)	1.33	1.33	1.18	1.18

RF-M7 & M6

MODEL	RF-M7	RF-M6
WHEEL SIZE	700C	26"
TRAVEL (mm)	N/A	
FEATURES	Mag. Blade	
STEERER	28.6mm A7050 Aluminum	
LOWER	Magnesium 9mm Open Dropout	
BRAKE TYPE	Disc + V-brake (Optional Roller Mount)	
WEIGHT (kgs) (w/ 200mm steerer)	0.83	0.75





E-CITY

Electrically power assisted bikes will change our traditional image of a bicycle regarding commuting, traveling, even vacation. They will bring us to work. Everyone can enjoy their trip with physical limitation.

TESTING STANDARD OF E-CITY&E-TREKKING

EN15194: 2017 Cycles - Electrically power assisted cycles - EPAC Bicycles



PULSE 29-15 AIR

MODEL	Air-RL	Air-TNL
STEERER	1.5" Steel tapered steerer (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm Steel QPQ Black	
CASTING	Magnesium 15mm QR	
ADJUSTMENT	A, RL	A, L
FEATURES	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring
SYSTEM	Oil(R), Air(L)	
TRAVEL (mm)	50, 60mm	
BRAKE TYPE	Disc Only	
WEIGHT (kgs) (w/ 200mm steerer)	2.69	2.63

*A: Air, RL: Remote Lock-out, L: Lock-out
*With Standard Fender Mount Baracket

PULSE 29 AIR/COIL

MODEL	Air-RL	Air-TNL	RL	TNL
STEERER	28.6mm Steel (Optional 1.5" Steel tapered steerer)			
CROWN PITCH	130mm			
CROWN	Aluminum Black			
STANCHION	30mm Steel QPQ Black			
CASTING	Aluminum 9mm Open Dropout			
ADJUSTMENT	A, RL	A, L	RL, P	L, P
FEATURES	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring	Hydraulic Remote Lock-Out	Hydraulic Lock-Out
SYSTEM	Oil(R), Air(L)		Oil(R), Coil(L)	
TRAVEL (mm)	50, 60mm			
BRAKE TYPE	Disc only			
WEIGHT (kgs) (w/ 200mm steerer)	2.89	2.83	2.9	2.84

*A: Air, RL: Remote Lock-out, L: Lock-out, P: Preload
*With Standard Fender Mount Baracket



PULSE 27.5-15 NEW

MODEL	Air-RL	Air-TNL
STEERER	28.6mm Steel (Optional 1.5" Steel tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	32mm Steel QPQ Black	
CASTING	Magnesium 15mm QR	
ADJUSTMENT	A, RL	A, L
FEATURES	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring
SYSTEM	Oil(R), Air(L)	
TRAVEL (mm)	60, 80, 100mm	
BRAKE TYPE	Disc only	
WEIGHT (kgs) (w/ 200mm steerer)	2.38	2.32

*A: Air, RL: Remote Lock-out, L: Lock-out, P: Preload





PULSE 27.5 AIR/COIL

MODEL	Air-RL	Air-TNL	RL	TNL
STEERER	28.6mm Steel (Optional 1.5" Steel tapered steerer)			
CROWN PITCH	130mm			
CROWN	Aluminum Black			
STANCHION	30mm Steel QPQ Black			
CASTING	Aluminum 9mm Open Dropout			
ADJUSTMENT	A, RL	A, L	RL, P	L, P
FEATURES	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring	Hydraulic Remote Lock-Out	Hydraulic Lock-Out
SYSTEM	Oil(R), Air(L)		Oil(R), Coil(L)	
TRAVEL (mm)	50mm			
BRAKE TYPE	Disc only			
WEIGHT (kgs) (w/ 200mm steerer)	2.81	2.75	2.82	2.76

*A: Air, RL: Remote Lock-out, L: Lock-out, P: Preload
*With Standard Fender Mount Baracket



VIV Air E NEW

MODEL	RL	TNL
STEERER	28.6mm Steel (Optional 1.5" Aluminum tapered steerer)	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	30mm Steel QPQ Color	
CASTING	Aluminum 9mm Open Dropout	
ADJUSTMENT	A, RL	A, L
FEATURES	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring
SYSTEM	Oil(R), Air(L)	
TRAVEL (mm)	50, 60, 80mm	
BRAKE TYPE	Disc or Disc & V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	2.80	2.74

*A: Air, RL: Remote Lock-out, L: Lock-out

VOGUE E NEW

MODEL	Air TRL	Air
STEERER	1.5" A7050 Aluminum tapered steerer	
CROWN PITCH	130mm	
CROWN	Aluminum Black	
STANCHION	30mm A7050 Aluminum Hard Anodize Black	
CASTING	Aluminum 9mm Open Dropout	
ADJUSTMENT	A, R, TRL	A, R, L, C
FEATURES	Hydraulic Rebound adjust, Remote Lock-out, Air Spring	Hydraulic Compression, Rebound adjust, Lock-out, Air Spring
SYSTEM	OCR(R), Air(L)	
TRAVEL (mm)	50, 60, 80mm	
BRAKE TYPE	Disc or Disc & V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	2.25	2.23

*A: Air, R: Rebound, C: Compression, TRL: Remote Lock-out, L: Lock-out



ADJUST SEATPOST





NEW

ELEV 8 E

MODEL	ELEV 8 E
FUNCTION	Hydraulic Height Adjustment Seat Post
TRAVEL	100, 125, 150mm
FEATURES	Electronic Remote Operated
DIAMETER	30.9 / 31.6mm
LENGTH (TRAVEL / LENGTH)	TR100: 420mm/ TR125: 445mm TR150 :510mm
WEIGHT	700-710g (30.9mm) 710-720g (31.6mm)



ELEV 8 H

MODEL	ELEV 8 H	ELEV 8 H-S
FUNCTION	Hydraulic Height Adjustment Seat Post	
TRAVEL	100, 125, 150mm	
FEATURES	External Hydraulic Remote Operated	Stealth Hydraulic Remote Operated
DIAMETER	30.9 / 31.6mm	
LENGTH (TRAVEL / LENGTH)	TR100: 365mm/ TR125: 414mm/ TR150 :439mm	
WEIGHT	735-745g (30.9mm) 745-755g (31.6mm)	685-695g (30.9mm) 695-705g (31.6mm)





ELEV 8 A

MODEL	ELEV 8 A	ELEV 8 A-S
FUNCTION	Air Height Adjustment Seat Post	
TRAVEL	100, 125, 150mm	
FEATURES	External Air Remote Operated	Stealth Air Remote Operated
DIAMETER	30.9 / 31.6mm	
LENGTH (TRAVEL / LENGTH)	TR100: 344mm/ TR125: 418mm/ TR150 :444mm	
WEIGHT	685-695g (30.9mm) 695-705g (31.6mm)	635-645g (30.9mm) 645-655g (31.6mm)


ECONOMIC

DARGON-32

MODEL	27.5 AIR-TNL
STEERER	1.5" Taper Carbon steerer tube
CROWN PITCH	130mm
CROWN	One Piece Carbon Crown
STANCHION	32mm 7050 Aluminum Hard Anodize
CASTING	Magnesium 9mm Open Dropout
ADJUSTMENT	A, L
FEATURES	Hydraulic Lock-out, Air Spring
SYSTEM	Oil(R), Air(L)
TRAVEL (mm)	100mm
BRAKE TYPE	Disc Only
WEIGHT (kgs) (w/ 200mm steerer)	1.80

*A: Air, L: Lock-out





ARES 27.5

MODEL	TNL	MLC	T
STEERER	28.6mm Steel		
CROWN PITCH	130mm		
CROWN	Aluminum ED Black		
STANCHION	32mm Steel CP Finish		
CASTING	Magnesium 9mm Open Dropout		
ADJUSTMENT	L, P	L, P	P
FEATURES	Hydraulic Lock-Out	Mechanical Lock-Out	–
SYSTEM	OCR+(R), Air(L)		Coil
TRAVEL (mm)	80, 100, 120mm		
BRAKE TYPE	Disc Only		
WEIGHT (kgs) (w/ 200mm steerer)	2.38	2.25	2.14

*RL: Remote Lock-out, L: Lock-out, P: Preload



ZEUS PRO / ZEUS

MODEL	26 Air SRL	26 Air-TNL
STEERER	28.6mm 7050 Aluminum (Optional 1.5"Aluminum steerer tube)	
CROWN PITCH	130mm	
CROWN	Aluminum Black Coating	
STANCHION	30mm 7050 Aluminum Hard Anodize	
CASTING	Magnesium 9mm Open Dropout	
ADJUSTMENT	A, RL	A, L
FEATURES	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring
SYSTEM	Oil(R), Air(L)	
TRAVEL (mm)	80, 100, 120mm	
BRAKE TYPE	Disc or D+V-brake	
WEIGHT (kgs) (w/ 200mm steerer)	1.96	1.91

*A: Air, RL: Remote Lock-out, L: Lock-out
*Steerer tube options: A.1.5" Straight Aluminum B. 1.5" to 1 1/8 Tapered Aluminum

ANGEL

MODEL	RL	TNL	T
STEERER	28.6mm Steel		
CROWN PITCH	112mm		
CROWN	Aluminum Black Coating		
STANCHION	28.6mm Steel Ti Color		
CASTING	Magnesium 9mm Open Dropout		
ADJUSTMENT			
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	–
SYSTEM	Oil(R), Coil(L)		Coil(L)
TRAVEL (mm)	75mm		
BRAKE TYPE	Disc or Disc & V-brake		
WEIGHT (kgs) (w/ 200mm steerer)	2.22	2.16	2.05

*RL: Remote Lock-out, L: Lock-out, P: Preload



ASTERIA 32

MODEL	Air SRL	Air-TNL	RL	TNL
STEERER	1.5" Taper Steel Steerer/28.6mm Steel			
CROWN PITCH	130mm			
CROWN	Aluminum Black Coating			
STANCHION	32mm 7050 Aluminum			
CASTING	Magnesium 9mm Open Dropout			
ADJUSTMENT	A, RL	A, L	RL, P	L, P
FEATURES	Hydraulic Remote Lock-out, Air Spring	Hydraulic Lock-out, Air Spring	Hydraulic Remote Lock-Out	Hydraulic Lock-Out
SYSTEM	Oil(R), Air(L)		Oil(R), Coil(L)	
TRAVEL (mm)	80, 100, 120mm			
BRAKE TYPE	Disc Only			
WEIGHT (kgs) (w/ 200mm steerer)	27.5" 2.17	27.5" 2.24	27.5" 2.16	27.5" 2.04

*A: Air, RL: Remote Lock-out, L: Lock-out, P: Preload





ASTERIA 28.6

MODEL	RL	TNL	MLC	T
STEERER	28.6mm Steel			
CROWN PITCH	130mm			
CROWN	Aluminum Black Coating			
STANCHION	28.6mm Steel CP Finish			
CASTING	Aluminum 9mm Open Dropout			
ADJUSTMENT	RL, P	L, P	L, P	P
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out	–
SYSTEM	Oil(R), Coil(L)		Coil	
TRAVEL (mm)	80, 100mm			
BRAKE TYPE	Disc Only			
WEIGHT (kgs) (w/ 200mm steerer)	27.5" 2.4	27.5" 2.35	27.5" 2.25	27.5" 2.1

*RL: Remote Lock-out, L: Lock-out, P: Preload



ASTERIA 26

MODEL	RL	TNL	MLC
STEERER	28.6mm Steel		
CROWN PITCH	130mm		
CROWN	Aluminum Black Coating		
STANCHION	30mm Steel CP Finish		
CASTING	Magnesium 9mm Open Dropout		
ADJUSTMENT	RL, P	L, P	L, P
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out
SYSTEM	Oil(R), Coil(L)		Coil
TRAVEL (mm)	80, 100mm		
BRAKE TYPE	Disc Only		
WEIGHT (kgs) (w/ 200mm steerer)	26" 2.38	26" 2.32	26" 2.21

*RL: Remote Lock-out, L: Lock-out, P: Preload

ASTERIA PLS

MODEL	RL	TNL	MLC
STEERER	28.6mm Steel		
CROWN PITCH	160mm		
CROWN	Aluminum Black Coating		
STANCHION	32mm Steel CP Finish		
CASTING	Magnesium 9mm Open Dropout		
ADJUSTMENT	RL, P	L, P	L, P
FEATURES	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-Out
SYSTEM	Oil(R), Coil(L)		Coil
TRAVEL (mm)	80, 100mm		
BRAKE TYPE	Disc Only		
WEIGHT (kgs) (w/ 200mm steerer)	26" 2.53	26" 2.45	26" 2.35

*RL: Remote Lock-out, L: Lock-out, P: Preload



MARS-U

MODEL	700C T
STEERER	28.6mm Steel
CROWN PITCH	112mm
CROWN	Aluminum Black Coating
STANCHION	28.6mm Steel CP Finish
CASTING	Aluminum 9mm Open Dropout
ADJUSTMENT	P
FEATURES	–
SYSTEM	Coil
TRAVEL (mm)	50mm
BRAKE TYPE	Disc & V-brake
WEIGHT (kgs) (w/ 200mm steerer)	2.49

*P: Preload





GARY

MODEL	20 T
STEERER	28.6mm Steel
CROWN PITCH	125mm
CROWN	Aluminum Black Coating
STANCHION	28.6mm Steel CP Finish
CASTING	Aluminum 9mm Open Dropout
ADJUSTMENT	P
FEATURES	–
SYSTEM	Coil
TRAVEL (mm)	50mm
BRAKE TYPE	Disc & V-brake
WEIGHT (kgs) (w/ 200mm steerer)	2.17

*P: Preload



RIDER

MODEL	TNL	MLC	T
STEERER	28.6mm Steel		
CROWN PITCH	130mm		
CROWN	Aluminum Black Coating		
STANCHION	30mm Steel CP Finish / Ti Color		
CASTING	Magnesium 9mm Open Dropout		
ADJUSTMENT	L, P	L, P	P
FEATURES	Hydraulic Lock-Out	Mechanical Lock-Out	–
SYSTEM	Oil(R), Coil(L)	Coil	
TRAVEL (mm)	80, 100mm		
BRAKE TYPE	Disc or Disc & V-brake		
WEIGHT (kgs) (w/ 200mm steerer)	2.12	1.98	2.2

*L: Lock-out, P: Preload



PILOT

MODEL	
WHEEL SIZE	700C
TRAVEL (mm)	40mm
FEATURES	Alu. Blade Spring Preload
STEERER	1.5" Taper Steerer 7050 Aluminum
LOWER	Aluminum 9mm Open Dropout
BRAKE TYPE	Roller& Disc brake only
WEIGHT (kgs) (w/ 200mm steerer)	2.10


KENNY
WWW.BIKE RESOLUCION.COM
THE BRUCE
RACEKING
Continental
RST

AM PACKAGE



Air Cartridge Upgrade Kit

The perfect upgrade for your coil spring fork!

It covers the widest possible range of riders weight and allows for custom tuning to the riders preference. In addition, it shaves some weight compared to a standard coil spring. Combine easy adjustability with the weight savings and this upgrade is a must have.

Fitments Available For

MODEL		
32mm Stanchion Forks	#H5GDPCDC2012-2	OMEGA 29 / 27.5, AERIAL 29 / 27.5
32mm Stanchion Forks	#H5GDPCDC2012-1	AERIAL 26
30mm Stanchion Forks	#H5GDPCDC2012-3	OMEGA 26 ALL BLAZE series

High Pressure Air-Pump

RST's on inflation pump for suspension forks and rear shocks.

A must have for shops, mechanics, and basically all RST Air fork riders.

Dial in the perfect tune on your ride.



Fitments Available For

MODEL		
Air-Pump	#H5PFGP-2200-300	ALL RST Air forks





GREASE

Keep your suspension performing at its peak.

Genuine RST grease was developed to withstand the most severe conditions. A perfectly balanced, lithium free suspension lubricant to retain that factory fresh performance of your RST fork.

To be used for all suggested maintenance intervals.

Fitments Available For

MODEL		
Lubrication Kit 50g	#H5GACB182	ALL RST FORK
Lubrication Kit 5g	#M5FA1-2990-000	STEM SHOCK



RST FORK SEAL KITS

Only use genuine RST seals to keep your fork performing at its peak. Seals keep the dust out and the grease in. Sponge with oil can make fork compression smoothly. SAG ring can help to measure SAG value easily. The seal kits need to be replaced when worn.

Fitments Available For

MODEL		
Seal kits for 38mm	#H5GBHJCJC01-KT	KILLAH 29, STITCH 29
Seal kits for 36mm	#H5FXY-2611-000-KT	KILLAH 27.5/26, STITCH 27.5/26, STORM, SPACE
Seal kits for 34mm	#H5GBHECKC1-KT	ROGUE, TITAN, SLOPE
Seal kits for 32mm	#H5GBH8CEC1-KT	REVOLT, REVEAL, SNYPER, F1RST 26/27.5/29/110 series,

SPRING SEALS

Only use genuine RST seals to keep your fork performing at its peak. Spring energized lip-seals keep the dust out and the grease in.The dust seals need to be replaced when worn.



Fitments Available For

Seal for 32mm	#H5GBH8CEC1	AERIAL 110-15, ALPHA 110-15
Seal for 32mm	#H5GBHBAEC1	AERIAL 26/27.5/29/110-9, ALPHA 110-9, OMEGA 29/27.5, DIRT, PULSE 29-15
Seal for 30mm	#H5GBHCCC1-1	F1RST PLATINUM, F1RST 24-15
Seal for 30mm	#H5GBH8CDC2	OMEGA 26, BLAZE 27.5/29, PULSE 27.5/29, VOLANT, VIVAir E, VOGUE E
Seal for 28.6mm	#H5GBH8CCC1	VOGUE, F1RST 24
Seal for 28.6mm	#H5GBHHCCC022	GILA 26/27.5/29, VITA, VIVAir, NOVA, AERIAL 24
Seal for 28.6mm	#H5GBHHCCC023	VERSE
Seal for 25.4mm	#H5GBHCBC2	CAPA, NEON, URBAN



(For OMEGA series only)

ADJUSTER (preload)

Genuine RST preload adjusters for replacement when something goes wrong.A wide range of adjustment, combined with high reliability, distinguish these adjusters.

Fitments Available For

MODEL		
Adjuster for 32mm	#H5GAEAB29-1	DIRT
Adjuster for 32mm	#H5GAE0A29-1	OMEGA 29/27.5, ALPHA series
Adjuster for 30mm	#H5GAE0A30-1	OMEGA 26
Adjuster for 30mm	#H5FVP-2162-100-1	BLAZE series, VOLANT
Adjuster for 28.6mm	#H5FNM-2163-300-1	GILA 29/27.5
Adjuster for 28.6mm	#H5FNM-2163-100-1	GILA 26, VITA, NOVA, VERSE
Adjuster for 25.4mm	#H5FNA-2162-100-1	CAPA, NEON, URBAN

RST SPECIAL WRENCH



You have to have the right tools to do the job.

Genuine RST preload adjusters have a unique shape that makes them stronger and you need the right tool to remove them for sporing changes and fork services. One tool conveniently fits all forks past,present and future.

Fitments Available For

MODEL		
RST wrench For preload adjusters	#H5GAC616	OMEGA, BLAZE, GILA, CAPA, VITA, NOVA, VERSE, NEON, URBAN



Caps

Fitments Available For

MODEL		
Cap for 32mm	#H5GAEDMG29	OMEGA 29 T / 27.5 T, ALPHA T
Cap for 30mm	#H5GAEDMG275	OMEGA 26 T, VOLANT T, ALL BLAZE T series
Cap for 28.6mm	#H5GAE8MG030	GILA 26 T, VITA T, NOVA T, VERSE T
Cap for 25.4mm	#H5FH2-2340-000	CAPA T, NEON T, URBAN T

Smart Remote Lock-out (SRL) Upgrade Kit

The SRL Upgrade moves your fork's compression adjustment and lock-out control to a more convenient location, on to your handlebar! The SRL Upgrade still allows the selection of different compression settings but also a locked-out setting at your finger tips while you ride.

The SRL Upgrade Kit can be mounted on most forks with a crown mounted lock-out control.



Fitments Available For

MODEL		
SRL Upgrade Kit	#H5GDPBARL2011	ALL RST fork



O-Ring Kit

Only use RST genuine o-rings to for the maintenance to keep the forks performing at its peak.


Special rubber compounds keep the fork being smooth.

The O-Rings need to be replaced when worn.

Please refer to the RST owners manual.

MODEL	
O-ring kit for 34mm	H5GORHGMC0-AM
O-ring kit for 32mm	H5GORHGEC0-AM

DIMENSIONS

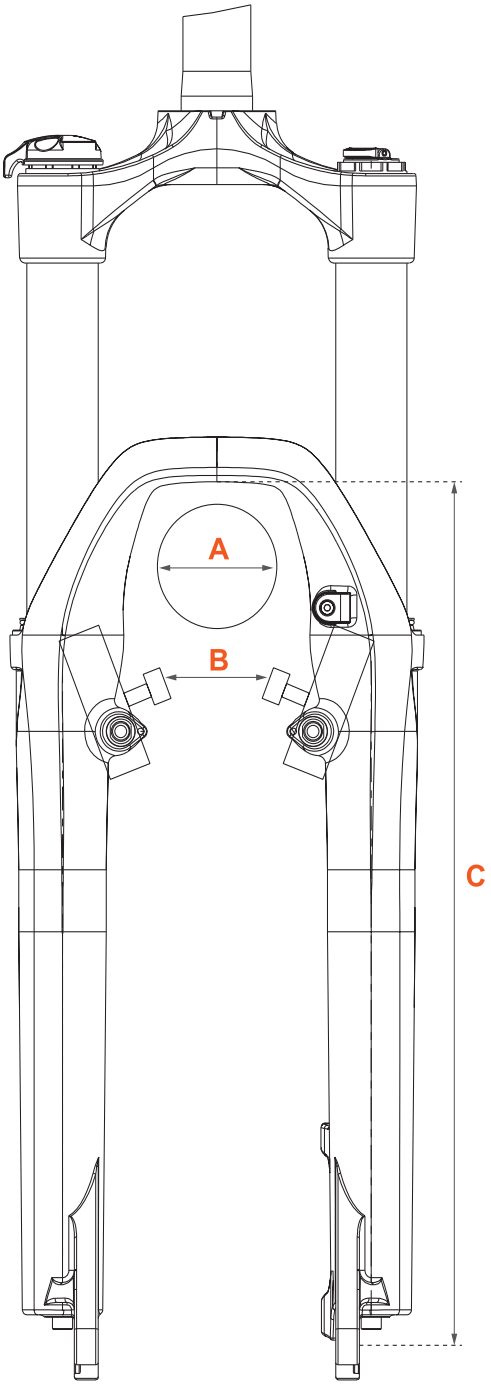

MODEL NAME	WIDTH A	WIDTH B	WIDTH C	MAXIMUM ROTOR SIZE
ROGUE 110-15	<83 for 27.5+ ; <62 for 29	-	380	203
TITAN 110-15	<83 for 27.5+ ; <62 for 29	-	380	203
VIBE 110-15	<83 for 27.5+ ; <62 for 29	-	380	203
FIRST 110-15 29 / 27.5+	<75 for 27.5+ ; <72 for 29	-	390	180
FIRST 110-9 29 / 27.5+	<75 for 27.5+ ; <62 for 29	-	378	180
FIRST 110-9 27.5 / 26	<75	-	365	180
AERIAL 110-15 29 / 27.5+	<75 for 27.5+ ; <72 for 29	-	390	180
AERIAL 110-9 29 / 27.5+	<75 for 27.5+ ; <62 for 29	-	378	180
AERIAL 110-9 27.5 / 26	<75	-	365	180
ALPHA 110-15 29 / 27.5+	<75 for 27.5+ ; <72 for 29	-	390	180
ALPHA 110-9 29 / 27.5+	<75 for 27.5+ ; <62 for 29	-	378	180
ALPHA 110-9 27.5 / 26	<75	-	365	180
REBEL	<83	-	-	203
KILLAH 29	<74		385	203
KILLAH	<69	-	365	203
STITCH 29	<74		385	203
STITCH	<69	-	365	203
STORM	<69	-	365	203
ROGUE	<62	-	365	203
TITAN	<62	-	365	203
RENEGADE	<124	-	390	203
REVOLT 29-15	<69	-	380	180
REVOLT 29	<69	-	380	180
REVOLT 27.5-15	<62	-	365	180
REVOLT 27.5	<62	-	365	180
REVEAL 29-15	<69	-	380	180
REVEAL 29	<69	-	380	180
REVEAL 27.5-15	<62	-	365	180
REVEAL 27.5	<62	-	365	180
REVEAL 26	<55	-	350	180
F1RST 29-15	<69	-	380	180
F1RST 29	<69	-	380	180
F1RST 27.5-15	<62	-	365	180
F1RST 27.5	<62	-	365	180
F1RST 26	<55	58	350	180
F1RST PLATINUM	<55	58	350	180
F1RST 24-15	<55	-	350	180
F1RST 24	<55	54	317	180
AERIAL 29 / 29-15	<69	-	380	180
AERIAL 27.5	<62	-	365	180
AERIAL 26	<55	58	350	180
AERIAL 24	<55	54	317	180
SNYPER	<62	-	317	180
OMEAG 29	<69	-	380	180
OMEGA 27.5	<62	-	365	180
OMEGA 26	<55	58	350	180
BLAZE 29	<72	-	390	180
BLAZE 27.5	<62	-	370	180
GILA 29	<69	-	380	180
GILA 27.5	<58	60	365	180
GILA 26	<58	60	350	180
CAPA 29/27.5	<69	-	380/365	180
CAPA 26/24/20	<58	54	352/322/289	160
SLOPE	<62	-	365	203
SPACE	<69	-	365	203
DIRT	<56	58	350	180
VOGUE / VOGUE E	<56	63	380	180
VIVAir / VIVAir E	<56	63	380	180
VITA	<56	63	380	180
VOLANT	<56	63	380	180
NOVA	<56	54	380	180
VERSE	<55	54	377	160
NEON	<55	54	382	180
URBAN	<55	-	377	160
PULSE 29-15	<69	-	380	180
PULSE 29	<72	-	390	180
PULSE 27.5	<62	-	370	180
PULSE 26	<59	63	350	180
SS-M7 / RF-M7	<45	45	380	160
SS-M6 / RF-M6	<50	45	345	160
SS-A7	<50		382	180
SS-A6	<50	45	345	180
SS-A4	<45	45	318	160
SS-A2-100	<32	44	265	160
SS-A2-75	<32	38	265	-

PRODUCT **SPEC**

Bike Category	Down Hill		Free Ride					All Mountain		
Model	**KILLAH**		**STITCH**				**STORM**	**REBEL**		
	29	27.5 / 26	29 AIR	29 COIL	27.5 / 26 AIR	27.5 / 26 COIL		Air	Air-TRL	Air w/o Lockout
Steerer	28.6mm 7050 Aluminum		1.5" Tapered steerer 7050 Aluminum		28.6mm 7050 Aluminum		28.6mm Cr-mo steel	1.5" Tapered steerer 7050 Aluminum		
1.5" Steerer (Straigh or Taper)	–		–		Option		Option	–		
Crown	145mm-Dual	138mm-Dual	145mm		138mm		138mm	140mm		
	Aluminum Black		Aluminum Black				Aluminum Black	Aluminum Black		
Stanchion	38mm 7050 Aluminum	36mm 7050 Aluminum	38mm 7050 Aluminum		36mm 7050 Aluminum		36mm steel	32mm 7050 Aluminum		
	Hard Anodize Black		Hard Anodize Black				QPQ black	Hard Anodize Black		
Lower	Magnesium		Magnesium				Magnesium	Magnesium		
	20x110mm boost Thru Bolt Axle	20mm Thru Bolt Axle	15x110mm Thru Bolt Axle (Optional 20x110mm boost)		20mm QR		20mm QR	15x110mm Thru Bolt Axle (Optional 20x110mm boost)		
Feature	Hydraulic Compression and Rebound adjust		Hydraulic compression and Rebound adjust, Air spring	Hydraulic compression and Rebound adjust	Hydraulic compression and Rebound adjust, Air spring	Hydraulic compression and Rebound adjust	Hydraulic Rebound-adjust	Hydraulic compression and Rebound adjust, Lock-out, Air Spring	Hydraulic compression and Rebound adjust, Remote Lock-out, Air Spring	Hydraulic compression and Rebound adjust, Air spring
Damper	OCR+		OCR+				Hydraulic Cartridge	OCR+		
Spring	Coil		Air	Coil	Air	Coil	Coil	Air		
Adjustment	R, C		A, R, C	R, C	A, R, C	R, C	R	A, R, L, C	A, R, RL	A, R, C
Travel	200mm		160, 170, 180mm				160, 170, 180mm	29": 80, 100, 130mm 27.5+: 100, 130, 140, 150mm		
Fork offset (mm)	51mm	43mm	51mm		43mm		43mm	43mm		
Fork height (mm)	29": 610	27.5": 580 26": 565	29": 605		27.5": 555 / 565 / 575 26": 540 / 550 / 560		27.5": 555 / 565 / 575 26": 540 / 550 / 560	29": 490 / 510 / 540 27.5+: 510 / 540 / 550 / 560		
Brake Type	Disc only		Disc only				Disc only	Disc only		
Disc Brake Mount	Post		Post				Post	Post		
Recommended Max. Rotor Size in mm	203		203				203	203		
Dynamo Bracket Mount	–		–				–	–		
Cable Guide for Hub Dynamo	–		–				–	–		
Roller Brake Mount	–		–				–	–		
Weight (kgs) (w/steerer at 200mm)	29": 3.00	27.5": 3.22 26": 3.20	29":2.58	29":2.89	27.5": 2.28 26": 2.26	27.5": 2.57 26": 2.55	27.5": 3.34 26": 3.32	29": 2.12 27.5"+: 2.22	29": 2.10 27.5"+: 2.20	
Wheel size	29"	27.5"/ 26"	29"		27.5"/ 26"		27.5"/ 26"	29" / 27.5"+		
Recommended Max. Tire Width(mm)	72 (2.8 inch)	66 (2.6 inch)	72 (2.8 inch)		66 (2.6 inch)		66 (2.6 inch)	27.5"+: 76 (3.0 inch) / 29": 61 (2.4 inch)		
Origin of Production	Taiwan		Taiwan				Taiwan	Taiwan		

	All Mountain						Fat Bike		Plus Bike					
	ROGUE			TITAN			RENEGADE		ROGUE 110-15			TITAN 110-15		
	Air w/o Lockout	Air-TRL	Air	Air w/o Lockout	Air-TRL	Air	Air-TRL	Air	Air w/o Lockout	Air-TRL	Air	Air w/o Lockout	Air-TRL	Air
	28.6mm 7050 Aluminum			28.6mm 7050 Aluminum			28.6mm 7050 Aluminum		1.5" Tapered steerer 7050 Aluminum			1.5" Tapered steerer 7050 Aluminum		
	Option			Option			Option		–			–		
	130mm			130mm			190mm		150mm			150mm		
	Aluminum Black			Aluminum Black			Aluminum Black		Aluminum Black			Aluminum Black		
	34mm 7050 Aluminum			34mm 7050 Aluminum			32mm 7050 Aluminum		34mm 7050 Aluminum			34mm 7050 Aluminum		
	Hard Anodize Black			Hard Anodize Black			Hard Anodize Black		Hard Anodize Black			Hard Anodize Black		
	Magnesium			Magnesium			Magnesium		Magnesium			Magnesium		
	15mm QR			15mm QR			15mm QR		15mm QR			15mm QR		
	Hydraulic compression and Rebound adjust, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic compression and Rebound adjust, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic compression and Rebound adjust, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic compression and Rebound adjust, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring
	OCR+			OCR			OCR		OCR+			OCR		
	Air			Air			Air		Air			Air		
	A, R, C	A, R, RL	A, R, L, C	A, R, C	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, R, C	A, R, RL	A, R, L, C	A, R, C	A, R, RL	A, R, L, C
	140, 150, 160mm			140, 150mm			80, 100, 120mm		120, 130, 140, 150, 160mm			120, 130, 140, 150, 160mm		
	43mm			43mm			51mm		51mm			51mm		
	27.5": 535 / 545 / 555 26": 520 / 530 / 540			27.5": 535 / 545 / 555 26": 520 / 530 / 540			500 / 520 / 540		530 / 540 / 550 / 560 / 570			530 / 540 / 550 / 560 / 570		
	Disc only			Disc only			Disc only		Disc only			Disc only		
	Post			Post			Post		Post			Post		
	203			203			203		203			203		
	–			–			–		–			–		
	–			–			–		–			–		
	–			–			–		–			–		
	27.5": 2.00 26": 1.98	27.5": 2.02 26": 2.00"	27.5": 2.00 26": 1.98	27.5": 2.29 26": 2.27	27.5": 2.29 26": 2.27	27.5": 2.29 26": 2.27	2.22	2.2	2.33	2.35	2.33	2.38	2.4	2.38
	27.5"/ 26"			27.5"/ 26"			26"		29" / 27.5"+			29" / 27.5"+		
	61 (2.4 inch)			61 (2.4 inch)			102 (4.0 inch)		27.5"+: 76 (3.0 inch) / 29": 61 (2.4 inch)			27.5"+: 76 (3.0 inch) / 29": 61 (2.4 inch)		
	Taiwan			Taiwan			Taiwan		Taiwan			Taiwan		

Bike Category	Plus Bike												
Model	VIBE 110-15			FIRST 110-15 29 / 27.5+		FIRST 110-9 29 / 27.5+		FIRST 110-9 27.5 / 26		AERIAL 110-15 29 / 27.5+			
	RA	RL	TNL	Air-TRL	Air	Air-TRL	Air	Air-TRL	Air	RL	TNL	MLC	
Steerer	1.5" Steel tapered steerer			28.6mm 7050 Aluminum		28.6mm 7050 Aluminum		28.6mm 7050 Aluminum		28.6mm 7050 Aluminum			
1.5" Steerer (Straigh or Taper)	–			Option		Option		Option		Option			
Crown	150mm			140mm		140mm		140mm		140mm			
	Aluminum Black			Aluminum Black		Aluminum Black		Aluminum Black		Aluminum Black			
Stanchion	34mm Steel			32mm 7050 Aluminum		32mm 7050 Aluminum		32mm 7050 Aluminum		32mm Steel			
	QPQ black			Hard Anodize Black		Hard Anodize Black		Hard Anodize Black		QPQ black			
Lower	Magnesium			Magnesium		Magnesium		Magnesium		Magnesium			
	15x110mm Thru Bolt Axle			15x110mm Thru Bolt Axle		9x110mm open dropout		9x110mm open dropout		15x110mm Thru Bolt Axle			
Feature	Hydraulic Rebound-adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Remote Lock-out, Air spring	Hydraulic Lock-out, Air spring	Mechanical Lock-out, Air spring	
Damper	Hydraulic Cartridge			OCR		OCR		OCR		Hydraulic Cartridge		–	
Spring	Coil			Air		Air		Air		Air			
Adjustment	R, P (easy preload)	RL, P (easy preload)	L, P (easy preload)	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, RL	A, L	A, L	
Travel	100, 120, 130, 140mm			80, 100, 120mm		80, 100, 120mm		80, 100, 120mm		80, 100, 120mm			
Fork offset (mm)	51mm			51mm		51mm		43mm		51mm			
Fork height (mm)	510 / 530 / 540 / 550			500 / 520 / 540		490 / 510 / 530		27.5: 475 / 495 / 515 26: 460 / 480 / 500		500 / 520 / 540			
Brake Type	Disc only			Disc only		Disc only		Disc only		Disc only			
Disc Brake Mount	Post			Post		Post		Post		Post			
Recommended Max. Rotor Size in mm	203			180		180		180		180			
Dynamo Bracket Mount	–			–		–		–		–			
Cable Guide for Hub Dynamo	–			–		–		–		–			
Roller Brake Mount	–			–		–		–		–			
Weight (kgs) (w/steerer at 200mm)	3.45	3.54	3.48	2.12	2.1	2.02	2	1.85	1.83	2.61	2.55	2.32	
Wheel size	29" / 27.5"+			29" / 27.5"+		29" / 27.5"+		27.5" / 26"		29" / 27.5"+			
Recommended Max. Tire Width(mm)	27.5"+: 76 (3.0 inch) / 29": 61 (2.4 inch)			27.5"+: 72 (2.8 inch) / 29": 61 (2.4 inch)		27.5"+: 72 (2.8 inch) / 29": 61 (2.4 inch)		66 (2.6 inch)		27.5"+: 72 (2.8 inch) / 29": 61 (2.4 inch)			
Origin of Production	Taiwan			Taiwan		Taiwan		Taiwan		Taiwan			

	Plus Bike														
	AERIAL 110-9 29 / 27.5+			AERIAL 110-9 27.5 / 26			ALPHA 110-15 29 / 27.5+					ALPHA 110-9 29 / 27.5+				
	RL	TNL	MLC	RL	TNL	MLC	RA	RL	TNL	MLC	T	RA	RL	TNL	MLC	T
	28.6mm 7050 Aluminum			28.6mm 7050 Aluminum			28.6mm Steel					28.6mm Steel				
	Option			Option			Option					Option				
	140mm			140mm			140mm					140mm				
	Aluminum Black			Aluminum Black			Aluminum Black					Aluminum Black				
	32mm Steel			32mm Steel			32 steel					32 steel				
	QPQ black			QPQ black			Ti color					Ti color				
	Magnesium			Magnesium			Magnesium					Magnesium				
	9x110mm open dropout			9x110mm open dropout			15x110mm Thru Bolt Axle					9x110mm open dropout				
	Hydraulic Remote Lock-out, Air spring	Hydraulic Lock-out, Air spring	Mechanical Lock-out, Air spring	Hydraulic Remote Lock-out, Air spring	Hydraulic Lock-out, Air spring	Mechanical Lock-out, Air spring	Hydraulic Rebound-adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-out	–	Hydraulic Rebound-adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-out	–
	Hydraulic Cartridge		–	Hydraulic Cartridge		–	Hydraulic Cartridge			–		Hydraulic Cartridge			–	
	Air			Air			Coil					Coil				
	A, RL	A, L	A, L	A, RL	A, L	A, L	R, P (easy preload)	RL, P (easy preload)	L, P (easy preload)	L, P (easy preload)	P (easy preload)	R, P (easy preload)	RL, P (easy preload)	L, P (easy preload)	L, P (easy preload)	P (easy preload)
	80, 100, 120mm			80, 100, 120mm			80, 100, 120, 130, 135mm					80, 100, 120, 130, 140mm				
	51mm			43mm			51mm					51mm				
	490 / 510 / 530			27.5: 475 / 495 / 515 26: 460 / 480 / 500			500 / 520 / 540 / 550 / 555					490 / 510 / 530 / 540 / 550				
	Disc only			Disc only			Disc only					Disc only				
	Post			Post			Post					Post				
	180			180			180					180				
	–			–			–					–				
	–			–			–					–				
	–			–			–					–				
	2.51	2.45	2.22	2.34	2.28	2.05	2.62	2.75	2.64	2.44	2.44	2.54	2.65	2.57	2.34	2.34
	29" / 27.5"+			27.5" / 26"			29" / 27.5"+					29" / 27.5"+				
	27.5"+: 72 (2.8 inch) / 29": 61 (2.4 inch)			66 (2.6 inch)			27.5"+: 72 (2.8 inch) / 29": 61 (2.4 inch)					27.5"+: 72 (2.8 inch) / 29": 61 (2.4 inch)				
	Taiwan			Taiwan			China					China				

Bike Category	Plus Bike					Dirt Jump			Dirt Jump		
Model	ALPHA 110-9 27.5 / 26					SPACE		SLOPE	DIRT		
	RA	RL	TNL	MLC	T	Jump	Free		RA	T	
Steerer	28.6mm Steel					28.6mm 7050 Aluminum	28.6mm Cr-mo steel	28.6mm 7050 Aluminum	28.6mm Steel		
1.5" Steerer (Straigh or Taper)	Option					–		Option	–		
Crown	140mm					138mm		130mm	130mm		
	Aluminum Black					Aluminum Black		Aluminum Black	Aluminum Black		
Stanchion	32 steel					36mm 7050 Aluminum	36mm steel	34mm 7050 Aluminum	32mm steel		
	Ti color					Hard Anodize Black	QPQ black	Hard Anodize Black	CP		
Lower	Magnesium					Magnesium		Magnesium	Aluminum		
	9x110mm open dropout					20mm Thru Bolt Axle		15mm QR	9mm open dropout		
Feature	Hydraulic Rebound-adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-out	–	Hydraulic Rebound-adjust, Air spring	Hydraulic Rebound-adjust	Hydraulic compression and Rebound adjust, Air spring	Hydraulic Rebound-adjust	–	
Damper	Hydraulic Cartridge			–		Hydraulic Cartridge		OCR+	Hydraulic Cartridge	–	
Spring	Coil					Air	Coil	Air	Coil		
Adjustment	R, P (easy preload)	RL, P (easy preload)	L, P (easy preload)	L, P (easy preload)	P (easy preload)	A, R	R	A, R, C	R, P	P	
Travel	80, 100, 120, 130, 140mm					80, 100mm		80, 100, 130mm	80, 100, 130mm		
Fork offset (mm)	43mm					43mm		43mm	38mm		
Fork height (mm)	475 / 495 / 515 / 525 / 535					465 / 485		27.5": 475 / 495 / 525 26": 470 / 490 / 520	460 / 480 / 510		
Brake Type	Disc only					Disc only		Disc only	Disc or D+V-brake		
Disc Brake Mount	Post					Post		Post	Post		
Recommended Max. Rotor Size in mm	180					203		203	180		
Dynamo Bracket Mount	–					–		–	–		
Cable Guide for Hub Dynamo	–					–		–	–		
Roller Brake Mount	–					–		–	–		
Weight (kgs) (w/steerer at 200mm)	2.37	2.46	2.4	2.17	2.17	2.63	2.93	27.5": 2.00 26": 1.98	3.01	3.05	
Wheel size	27.5" / 26"					26"		27.5" / 26"	26"		
Recommended Max. Tire Width(mm)	66 (2.6 inch)					66 (2.6 inch)		61 (2.4 inch)	56 (2.2 inch)		
Origin of Production	China					Taiwan		Taiwan	China		

	29er				27.5"				XC 29er			
	REVOLT				REVOLT				REVEAL			
	29-15 TRL	29-15	29 TRL	29	27.5-15 TRL	27.5-15	27.5 TRL	27.5	29-15 TRL	29-15	29 TRL	29
	28.6mm 7050 Aluminum				28.6mm 7050 Aluminum				28.6mm 7050 Aluminum			
	Option				Option				Option			
	130mm				130mm				130mm			
	Aluminum Black				Aluminum Black				Aluminum Black			
	32mm 7050 Aluminum				32mm 7050 Aluminum				32mm 7050 Aluminum			
	Hard Anodize Black				Hard Anodize Black				Hard Anodize Black			
	Magnesium				Magnesium				Magnesium			
	15mm QR		9mm open dropout		15mm QR		9mm open dropout		15mm QR		9mm open dropout	
	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring
	OCR				OCR				OCRC			
	Air				Air				Air			
	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C
	130, 140mm				130, 140mm				80, 100, 120mm			
	51mm				43mm				51mm			
	540 / 550				525 / 535				490 / 510 / 530			
	Disc only				Disc only				Disc only			
	Post				Post				Post			
	180				180				180			
	–				–				–			
	–				–				–			
	–				–				–			
	2.05	2.03	1.91	1.89	2.03	2.01	1.89	1.87	1.82	1.8	1.8	1.61
	29"				27.5"				29"			
	61 (2.4 inch)				61 (2.4 inch)				61 (2.4 inch)			
	Taiwan				Taiwan				China			

Bike Category	XC 27.5"				XC 26"				XC 29er			
Model	REVEAL				REVEAL		F1RST		F1RST			
	27.5-15 TRL	27.5-15	27.5 TRL	27.5	26 TRL	26	Platinum TRL	Platinum	29-15 TRL	29-15	29 TRL	29
Steerer	28.6mm 7050 Aluminum				28.6mm 7050 Aluminum		28.6mm 7050 Aluminum		28.6mm 7050 Aluminum			
1.5" Steerer (Straigh or Taper)	Option				Option		Option		Option			
Crown	130mm				130mm		130mm		130mm			
	Aluminum Black				Aluminum Black		Aluminum Black		Aluminum Black			
Stanchion	32mm 7050 Aluminum				32mm 7050 Aluminum		30mm 7050 Aluminum		32mm 7050 Aluminum			
	Hard Anodize Black				Hard Anodize Black		Hard Anodize Black		Hard Anodize Black			
Lower	Magnesium				Magnesium		Magnesium		Magnesium			
	15mm QR		9mm open dropout		9mm open dropout		9mm open dropout		15mm QR		9mm open dropout	
Feature	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring
Damper	OCR+				OCRC		OCR		OCR			
Spring	Air				Air		Air		Air			
Adjustment	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C
Travel	80, 100, 120mm				80, 100, 120mm		80, 100mm		80, 100, 120mm			
Fork offset (mm)	43mm				38mm		38mm		51mm			
Fork height (mm)	475 / 495 / 515				460 / 480 / 500		460 / 480		490 / 510 / 530			
Brake Type	Disc only				Disc or D+V-brake		Disc or D+V-brake		Disc only			
Disc Brake Mount	Post				Post		Post		Post			
Recommended Max. Rotor Size in mm	180				180		180		180			
Dynamo Bracket Mount	–				–		–		–			
Cable Guide for Hub Dynamo	–				–		–		–			
Roller Brake Mount	–				–		–		–			
Weight (kgs) (w/steerer at 200mm)	1.78	1.76	1.65	1.63	1.53	1.51	1.52	1.5	2.15	2.13	1.96	1.94
Wheel size	27.5"				26"		26"		29"			
Recommended Max. Tire Width(mm)	61 (2.4 inch)				56 (2.2 inch)		56 (2.2 inch)		61 (2.4 inch)			
Origin of Production	Taiwan				Taiwan		Taiwan		Taiwan			

	XC 27.5"				XC 26"		XC 29er		XC 27.5"		XC 26"	
	F1RST				F1RST		AERIAL Rebound 29		AERIAL Rebound 27.5		AERIAL Rebound 26	
	27.5-15 TRL	27.5-15	27.5 TRL	27.5	26 TRL	26	RL-R	TNL-R	RL-R	TNL-R	RL-R	TNL-R
	28.6mm 7050 Aluminum				28.6mm 7050 Aluminum		28.6mm 7050 Aluminum		28.6mm 7050 Aluminum		28.6mm 7050 Aluminum	
	Option				Option		Option		Option		Option	
	130mm				130mm		130mm		130mm		130mm	
	Aluminum Black				Aluminum Black		Aluminum Black		Aluminum Black		Aluminum Black	
	32mm 7050 Aluminum				32mm 7050 Aluminum		32mm Steel		32mm Steel		32mm Steel	
	Hard Anodize Black				Hard Anodize Black		QPQ black		QPQ black		QPQ black	
	Magnesium				Magnesium		Magnesium		Magnesium		Magnesium	
	15mm QR		9mm open dropout		9mm open dropout		9mm open dropout		9mm open dropout		9mm open dropout	
	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic Rebound-adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic Rebound-adjust, Lock-out, Air spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic Rebound-adjust, Lock-out, Air spring
	OCR				OCR		Hydraulic Cartridge		Hydraulic Cartridge		Hydraulic Cartridge	
	Air				Air		Air		Air		Air	
	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, R, RL	A, R, L	A, R, RL	A, R, L	A, R, RL	A, R, L
	80, 100, 120mm				80, 100, 120mm		80, 100, 120mm		80, 100, 120mm		80, 100, 120mm	
	43mm				38mm		51mm		43mm		38mm	
	475 / 495 / 515				460 / 480 / 500		490 / 510 / 530		475 / 495 / 515		460 / 480 / 500	
	Disc only				Disc or D+V-brake		Disc only		Disc only		Disc or D+V-brake	
	Post				Post		Post		Post		Post	
	180				180		180		180		180	
	–				–		–		–		–	
	–				–		–		–		–	
	–				–		–		–		–	
	2	1.98	1.88	1.86	1.82	1.8	2.4	2.34	2.42	2.36	2.37	2.31
	27.5"				26"		29"		27.5"		26"	
	61 (2.4 inch)				56 (2.2 inch)		61 (2.4 inch)		61 (2.4 inch)		56 (2.2 inch)	
	Taiwan				Taiwan		Taiwan		Taiwan		Taiwan	

Bike Category	XC 29er						XC 27.5"			XC 26"			
Model	AERIAL 29-15			AERIAL 29			AERIAL 27.5			AERIAL 26			
	RL	TNL	MLC	RL	TNL	MLC	RL	TNL	MLC	RL	TNL	MLC	
Steerer	28.6mm 7050 Aluminum			28.6mm 7050 Aluminum			28.6mm 7050 Aluminum			28.6mm 7050 Aluminum			
1.5" Steerer (Straigh or Taper)	Option			Option			Option			Option			
Crown	130mm			130mm			130mm			130mm			
	Aluminum Black			Aluminum Black			Aluminum Black			Aluminum Black			
Stanchion	32mm Steel			32mm Steel			32mm Steel			32mm Steel			
	QPQ black			QPQ black			QPQ black			QPQ black			
Lower	Magnesium			Magnesium			Magnesium			Magnesium			
	15mm QR			9mm open dropout			9mm open dropout			9mm open dropout			
Feature	Hydraulic Remote Lock-out, Air spring	Hydraulic Lock-out, Air spring	Mechanical Lock-out, Air spring	Hydraulic Remote Lock-out, Air spring	Hydraulic Lock-out, Air spring	Mechanical Lock-out, Air spring	Hydraulic Remote Lock-out, Air spring	Hydraulic Lock-out, Air spring	Mechanical Lock-out, Air spring	Hydraulic Remote Lock-out, Air spring	Hydraulic Lock-out, Air spring	Mechanical Lock-out, Air spring	
Damper	Hydraulic Cartridge		–	Hydraulic Cartridge		–	Hydraulic Cartridge		–	Hydraulic Cartridge		–	
Spring	Air			Air			Air			Air			
Adjustment	A, RL	A, L	A, L	A, RL	A, L	A, L	A, RL	A, L	A, L	A, RL	A, L	A, L	
Travel	80, 100, 120mm			80, 100, 120mm			80, 100, 120mm			80, 100, 120mm			
Fork offset (mm)	51mm			51mm			43mm			38mm			
Fork height (mm)	490 / 510 / 530			490 / 510 / 530			475 / 495 / 515			460 / 480 / 500			
Brake Type	Disc only			Disc only			Disc only			Disc or D+V-brake			
Disc Brake Mount	Post			Post			Post			Post			
Recommended Max. Rotor Size in mm	180			180			180			180			
Dynamo Bracket Mount	–			–			–			–			
Cable Guide for Hub Dynamo	–			–			–			–			
Roller Brake Mount	–			–			–			–			
Weight (kgs) (w/steerer at 200mm)	2.53	2.47	2.27	2.34	2.28	2.05	2.26	2.2	2	2.31	2.25	2.02	
Wheel size	29"			29"			27.5"			26"			
Recommended Max. Tire Width(mm)	61 (2.4 inch)			61 (2.4 inch)			61 (2.4 inch)			56 (2.2 inch)			
Origin of Production	Taiwan			Taiwan			Taiwan			Taiwan			

	XC 29er					XC 27.5"					XC 26"				
	OMEGA 29					OMEGA 27.5					OMEGA 26				
	RA	RL	TNL	MLC	T	RA	RL	TNL	MLC	T	RA	RL	TNL	MLC	T
	28.6mm Steel					28.6mm Steel					28.6mm Steel				
	Option					Option					Option				
	130mm					130mm					130mm				
	Aluminum Black					Aluminum Black					Aluminum Black				
	32mm Steel					32mm Steel					30mm Steel				
	Ti color					Ti color					Ti color				
	Magnesium					Magnesium					Magnesium				
	9mm open dropout					9mm open dropout					9mm open dropout				
	Hydraulic Rebound-adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-out	–	Hydraulic Rebound-adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-out	–	Hydraulic Rebound-adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-out	–
	Hydraulic Cartridge			–		Hydraulic Cartridge			–		Hydraulic Cartridge			–	
	Coil					Coil					Coil				
	R, P (easy preload)	RL, P (easy preload)	L, P (easy preload)	L, P (easy preload)	P (easy preload)	R, P (easy preload)	RL, P (easy preload)	L, P (easy preload)	L, P (easy preload)	P (easy preload)	R, P (easy preload)	RL, P (easy preload)	L, P (easy preload)	L, P (easy preload)	P (easy preload)
	80, 100, 120mm					80, 100, 120mm					80, 100, 120mm				
	51mm					43mm					38mm				
	490 / 510 / 530					475 / 495 / 515					460 / 480 / 500				
	Disc only					Disc only					Disc or D+V-brake				
	Post					Post					Post				
	180					180					180				
	–					–					–				
	–					–					–				
	–					–					–				
	2.44	2.55	2.47	2.24	2.24	2.27	2.36	2.3	2.07	2.07	2.34	2.44	2.37	2.11	2.11
	29"					27.5"					26"				
	61 (2.4 inch)					61 (2.4 inch)					56 (2.2 inch)				
	China					China					China				

Bike Category	XC 29er					XC 27.5"					XC/Sport 29er			
Model	BLAZE 29					BLAZE 27.5					GILA 29			
	RA	RL	TNL	MLC	T	RA	RL	TNL	MLC	T	RL	TNL	MLC	
Steerer	28.6mm Steel					28.6mm Steel					28.6mm Steel			
1.5" Steerer (Straigh or Taper)	Option					–					–			
Crown	130mm					130mm					130mm			
	Aluminum Black					Aluminum Black					Aluminum Black			
Stanchion	30mm steel					30mm steel					28.6mm steel			
	CP					CP					CP			
Lower	Aluminum					Aluminum					Aluminum			
	9mm open dropout					9mm open dropout					9mm open dropout			
Feature	Hydraulic Rebound-adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-out	–	Hydraulic Rebound-adjust	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-out	–	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-out	
Damper	Hydraulic Cartridge			–		Hydraulic Cartridge			–		Hydraulic Cartridge		–	
Spring	Coil					Coil					Coil			
Adjustment	R,P	RL, P	L, P	L, P	P	R,P	RL, P	L, P	L, P	P	RL, P	L, P	L, P	
Travel	80, 100, 120mm					80, 100, 120, 130mm					80, 100, 120mm			
Fork offset (mm)	51mm					44mm					51mm			
Fork height (mm)	500 / 520 / 540					475 / 495 / 515 / 525					490 / 510 / 530			
Brake Type	Disc Only					Disc only					Disc only			
Disc Brake Mount	Post					Post					Post			
Recommended Max. Rotor Size in mm	180					180					180			
Dynamo Bracket Mount	–					–					–			
Cable Guide for Hub Dynamo	–					–					–			
Roller Brake Mount	–					–					–			
Weight (kgs) (w/steerer at 200mm)	2.81	2.9	2.84	2.61	2.61	2.73	2.82	2.76	2.51	2.55	2.7	2.64	2.41	
Wheel size	29"					27.5"					29"			
Recommended Max. Tire Width(mm)	66 (2.6 inch)					61 (2.4 inch)					61 (2.4 inch)			
Origin of Production	China					China					China			

		XC/Sport 27.5"				XC/Sport 26"				Sport					
		GILA 27.5				GILA 26				CAPA 29		CAPA 27.5		CAPA 26	
	T	RL	TNL	MLC	T	RL	TNL	MLC	T	MLC	T	MLC	T	MLC	T
		28.6mm Steel				28.6mm Steel				28.6mm Steel		28.6mm Steel		28.6/25.4mm Steel	
		–				–				–		–		–	
		125mm				125mm				125mm		125mm		120mm	
		Aluminum Black				Aluminum Black				Aluminum Black		Aluminum Black		Aluminum Black	
		28.6mm steel				28.6mm steel				25.4mm steel		25.4mm steel		25.4mm steel	
		CP				CP				CP		CP		CP	
		Aluminum				Aluminum				Aluminum		Aluminum		Aluminum	
		9mm open dropout				9mm open dropout				9mm open dropout		9mm open dropout		9mm open dropout	
	–	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-out	–	Hydraulic Remote Lock-Out	Hydraulic Lock-Out	Mechanical Lock-out	–	Mechanical Lock-out	–	Mechanical Lock-out	–	Mechanical Lock-out	–
	–	Hydraulic Cartridge		–		Hydraulic Cartridge		–		–		–		–	
		Coil				Coil				Coil		Coil		Coil	
	P	RL, P	L, P	L, P	P	RL, P	L, P	L, P	P	L, P	P	L, P	P	L, P	P
		80, 100mm				80, 100mm				60, 80mm		60, 80mm		80mm	
		43mm				38mm				51mm		43mm		38mm	
		475 / 495				460 / 480				470 / 490		455 / 475		460	
		Disc or D+V-brake				Disc or D+V-brake				Disc or D+V brake		Disc or D+V brake		Disc or D+V-brake	
		Post				Post				Post		Post		IS	
		180				180				180		180		160	
		–				–				–		–		–	
		–				–				–		–		–	
		–				–				–		–		–	
	2.41	2.5	2.44	2.19	2.14	2.41	2.35	2.1	2.05	2.28	2.23	2.15	2.10	2.03	1.98
		27.5"				26"				29"		27.5"		26"	
		56 (2.2 inch)				56 (2.2 inch)				61 (2.4 inch)		61 (2.4 inch)		56 (2.2 inch)	
		China				China				China		China		China	

Bike Category	Junior XC 24"													
Model	SNYPER		F1RST				AERIAL 24			CAPA		PULSE AIR 29-15		
	24 TRL	24	24-15 TRL	24-15	24 TRL	24	RL	TNL	MLC	MLC 24	T24, T20	RL	TNL	
Steerer	28.6mm 7050 Aluminum		28.6mm 7050 Aluminum				28.6mm 7050 Aluminum			28.6/25.4mm Steel		1.5" Tapered steerer Steel/ 7050 Aluminum		
1.5" Steerer (Straigh or Taper)	Option		Option		–		–			–		Option		
Crown	130mm		130mm		125mm		125mm			120mm		130mm		
	Aluminum Black		Aluminum Black				Aluminum Black			Aluminum Black		Aluminum Black		
Stanchion	32mm 7050 Aluminum		30mm 7050 Aluminum		28.6mm 7050 Aluminum		28.6mm steel			25.4 steel		32mm steel		
	Hard Anodize Black		Hard Anodize Black				QPQ black			CP		QPQ black		
Lower	Magnesium		Magnesium				Magnesium			Aluminum		Magnesium		
	9mm open dropout		15mm QR		9mm open dropout		9mm open dropout			9mm open dropout		15mm QR		
Feature	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air spring	Hydraulic Rebound-adjust Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air Spring	Hydraulic Remote Lock-out, Air spring	Hydraulic Lock-out, Air spring	Mechanical Lock-out, Air spring	Mechanical Lock-Ou	–	Hydraulic Remote Lock-out, Air spring	Hydraulic Lock-out, Air spring	
Damper	OCR		OCR				Hydraulic Cartridge		–	–		Hydraulic Cartridge		
Spring	Air		Air				Air			Coil		Air		
Adjustment	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C	A,RL	A,L	A,L	L, P	P	A,RL	A,L	
Travel	60, 70, 80, 100, 120mm		80, 100, 120mm		60mm		60mm			24": 50mm	24"/20": 50mm	50, 60mm		
Fork offset (mm)	38mm		38mm				38mm			38mm		51mm		
Fork height (mm)	410 / 420 / 430 / 450 / 470		460 / 480 / 500		410		410			24": 399	24/ 20": 393 / 373	460 / 470		
Brake Type	Disc only		Disc Only		D+V-brake		D+V-brake			Disc or D+V-brake		Disc only		
Disc Brake Mount	Post		Post				Post			IS		Post		
Recommended Max. Rotor Size in mm	180		180				180			160		180		
Dynamo Bracket Mount	–		–				–			–		–		
Cable Guide for Hub Dynamo	–		–				–			–		–		
Roller Brake Mount	–		–				–			–		–		
Weight (kgs) (w/steerer at 200mm)	1.87	1.85	1.92	1.9	1.62	1.6	1.99	1.93	1.73	1.93	1.84/1.75	2.69	2.63	
Wheel size	24"		24"				24"			24"	24"/20"	29"		
Recommended Max. Tire Width(mm)	56 (2.2 inch)		66 (2.6 inch)		56 (2.2 inch)		56 (2.2 inch)			56 (2.2 inch)		61 (2.4 inch)		
Origin of Production	Taiwan		Taiwan				Taiwan			China		Taiwan		

Speedy E-Bike																
	PULSE AIR 29		PULSE AIR 27.5-15		PULSE AIR 27.5		PULSE COIL 29		PULSE COIL 27.5		VOGUE E		VOGUE	
	RL	TNL	RL	TNL	RL	TNL	RL	TNL	RL	TNL	Air TRL	Air	Air TRL	Air
	28.6mm Steel		28.6mm Steel		28.6mm Steel		28.6mm Steel		28.6mm Steel		28.6mm 7050 Aluminum		28.6mm 7050 Aluminum	
	Option		Option		Option		Option		Option		Option		Option	
	130mm		130mm		130mm		130mm		130mm		130mm		120mm	
	Aluminum Black		Aluminum Black		Aluminum Black		Aluminum Black		Aluminum Black		Aluminum Black		Aluminum Black	
	30 steel		30mm steel		30mm steel		30mm steel		30mm steel		28.6mm 7050 Aluminum		28.6mm 7050 Aluminum	
	QPQ black		QPQ black		QPQ black		QPQ black		QPQ black		Hard Anodize Black		Hard Anodize Black	
	Aluminum		Magnesium		Aluminum		Aluminum		Aluminum		Aluminum		Magnesium	
	9mm open dropout		15mm QR		9mm open dropout		9mm open dropout		9mm open dropout		9mm open dropout		9mm open dropout	
	Hydraulic Remote Lock-out, Air spring	Hydraulic Lock-out, Air spring	Hydraulic Remote Lock-out, Air spring	Hydraulic Lock-out, Air spring	Hydraulic Remote Lock-out, Air spring	Hydraulic Lock-out, Air spring	Hydraulic Remote Lock-Out	Hydraulic Lock-out	Hydraulic Remote Lock-Out	Hydraulic Lock-out	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air Spring	Hydraulic Rebound-adjust, Remote Lock-out, Air spring	Hydraulic compression and Rebound adjust, Lock-out, Air Spring
	Hydraulic Cartridge		Hydraulic Cartridge		Hydraulic Cartridge		Hydraulic Cartridge		Hydraulic Cartridge		OCR		OCR	
	Air		Air		Air		Coil		Coil		Air		Air	
	A,RL	A,L	A,RL	A,L	A,RL	A,L	RL, P	L, P	RL, P	L, P	A, R, RL	A, R, L, C	A, R, RL	A, R, L, C
	50, 60mm		60, 80, 100mm		50mm		50mm		50mm		50, 60, 80mm		50, 60, 80mm	
	51mm		43mm		43mm		51mm		43mm		44mm		44mm	
	470 / 480		455 / 475 / 495		445		470		445		460 / 470 / 490		460 / 470 / 490	
	Disc only		Disc only		Disc only		Disc Only		Disc only		Disc or D+V-brake		Disc or D+V-brake	
	Post		Post		Post		Post		Post		Post		Post	
	180		180		180		180		180		180		180	
	–		–		–		–		–		Yes		Yes	
	–		–		–		–		–		Option		Option	
	–		–		–		–		–		No		No	
	2.89	2.83	2.38	2.32	2.81	2.75	2.9	2.84	2.28	2.23	2.15	2.10	2.15	2.10
	29"		27.5"		27.5"		29"		27.5"		700C only		700C only	
	66 (2.6 inch)		61 (2.4 inch)		61 (2.4 inch)		66 (2.6 inch)		61 (2.4 inch)		51 (2.0 inch)		51 (2.0 inch)	
	Taiwan		Taiwan		Taiwan		Taiwan		Taiwan		Taiwan		Taiwan	

Bike Category	Speedy E-Bike											
Model	VIVAir E	VIVAir		VITA				VOLANT				
	TNL	RL	TNL	RL	TNL	MLC	T	RL	TNL	MLC	T	
Steerer	28.6mm Steel	28.6mm 7050 Aluminum		28.6mm Steel				28.6mm Steel				
1.5" Steerer (Straigh or Taper)	Option	Option		Option				Option				
Crown	130mm	120mm		120mm				130mm				
	Aluminum Black	Aluminum Black		Aluminum Black				Aluminum Black				
Stanchion	30mm steel	28.6mm steel		28.6mm steel				30mm steel				
	QPQ black	QPQ black		Ti color				CP				
Lower	Aluminum	Magnesium		Magnesium				Aluminum				
	9mm open dropout	9mm open dropout		9mm open dropout				9mm open dropout				
Feature	Hydraulic Lock-out, Air spring	Hydraulic Remote Lock-out, Air spring	Hydraulic Lock-out, Air spring	Hydraulic Remote Lock-out,	Hydraulic Lock-Out,	Mechanical Lock-Out	–	Hydraulic Remote Lock-out,	Hydraulic Lock-Out,	Mechanical Lock-Out	–	
Damper	Hydraulic Cartridge	Hydraulic Cartridge		Hydraulic Cartridge		–		Hydraulic Cartridge		–		
Spring	Air	Air		Coil				Coil				
Adjustment	A,L	A, R, RL	A, R, L, C	RL, P (easy preload)	L, P (easy preload)	L, P (easy preload)	P (easy preload)	RL, P	L, P	L, P	P	
Travel	50, 60, 80mm	50, 60, 80mm		50, 60, 80mm				50, 60, 80mm				
Fork offset (mm)	44mm	44mm		44mm				44mm				
Fork height (mm)	460 / 470 / 490	460 / 470 / 490		460 / 470 / 490				460 / 470 / 490				
Brake Type	Disc or D+V-brake	Disc or D+V-brake		Disc or D+V-brake				Disc or D+V-brake				
Disc Brake Mount	Post	Post		Post				Post				
Recommended Max. Rotor Size in mm	180	180		180				180				
Dynamo Bracket Mount	Yes	Yes		yes				Yes				
Cable Guide for Hub Dynamo	Option	Option		option				Option				
Roller Brake Mount	No	No		No				No				
Weight (kgs) (w/steerer at 200mm)	2.10	2.23	2.17	2.41	2.35	2.13	2.13	2.80	2.74	2.51	2.51	
Wheel size	700C only	700C only		700C only				700C only				
Recommended Max. Tire Width(mm)	51 (2.0 inch)	51 (2.0 inch)		51 (2.0 inch)				51 (2.0 inch)				
Origin of Production	Taiwan	Taiwan		China				China				

	Trekking / City															
	NOVA				VERSE				NEON				URBAN			
	RL	TNL	MLC	T	RL	TNL	MLC	T	RL	TNL	ML	T	RL	TNL	MLC	T
	28.6mm Steel				28.6/ 25.4mm Steel				28.6/ 25.4mm Steel				28.6/25.4mm Steel			
	–				–				–				–			
	112mm				112mm				112mm				112mm			
	Aluminum Black				Aluminum Black				Aluminum Black				Aluminum Black			
	28.6mm steel				28.6mm steel				25.4mm steel				25.4mm steel			
	CP				CP				CP				CP			
	Aluminum				Aluminum				Aluminum				Aluminum			
	9mm open dropout				9mm open dropout				9mm open dropout				9mm open dropout			
	Hydraulic Remote Lock-out,	Hydraulic Lock-Out,	Mechanical Lock-Out	–	Hydraulic Remote Lock-out,	Hydraulic Lock-Out,	Mechanical Lock-Out	–	Hydraulic Remote Lock-out,	Hydraulic Lock-Out,	Mechanical Lock-Out	–	Hydraulic Remote Lock-out,	Hydraulic Lock-Out,	Mechanical Lock-Out	–
	Hydraulic Cartridge				Hydraulic Cartridge	–			Hydraulic Cartridge		–		Hydraulic Cartridge		–	
	Coil				Coil				Coil				Coil			
	RL, P	L,P	L, P	P	RL, P	L, P	L, P	P	RL, P	L, P	L, P	P	RL, P	L, P	L, P	P
	50, 60mm				40, 50mm				50, 60mm				40mm			
	44mm				44mm				44mm				44mm			
	466 / 476				450 / 460				460 / 470				450			
	Disc or D+V-brake				V-brake only				Disc or Disc+V-brake				Roller& Disc brake only, no V-brake available			
	IS				no				Post				IS			
	180				N/A				180				160			
	Yes				No				Yes				Yes			
	Option				Option				Option				Option			
	No				No				No				Yes			
	2.62	2.56	2.35	2.36	2.57	2.51	2.3	2.31	2.17	2.11	1.95	1.94	2.13	2.07	1.86	1.87
	700C only				700C only				700C only				700C only			
	51 (2.0 inch)				51 (2.0 inch)				51 (2.0 inch)				51 (2.0 inch)			
	China				China				China				China			

Model	SINGLE SHOCK						
	SS-M7-T	SS-M7	SS-M6-T	SS-M6	SS-A7-T	SS-A7	
Steerer	28.6mm 7050 Aluminum (210mm length min.)	28.6mm 7050 Aluminum (210mm length min.)	28.6mm 7050 Aluminum (210mm length min.)	28.6mm 7050 Aluminum (210mm length min.)	28.6mm 7050 Aluminum (Optional 1.5" tapered steerer) (210mm length min.)	28.6mm 7050 Aluminum (Optional 1.5" tapered steerer) (210mm length min.)	
Lower	Magnesium	Magnesium	Magnesium	Magnesium	Aluminum	Aluminum	
	9mm open dropout	9mm open dropout	9mm open dropout	9mm open dropout	9mm open dropout	9mm open dropout	
Feature	Mag. blade Spring preload	Mag. blade	Mag. blade Spring preload	Mag. blade	Alu. Blade Spring preload	Alu. Blade	
Spring	Coil with bumper	Coil with bumper	Coil with bumper	Coil with bumper	Coil with bumper	Coil with bumper	
Adjustment	P	–	P	–	P	–	
Travel	30mm	35mm	30mm	35mm	30mm	35mm	
Fork offset (mm)	43mm	43mm	43mm	43mm	43mm	43mm	
Fork height (mm)	475	470	440	435	478.5	473.5	
Brake Type	Disc & V-brake (Optional Roller Mount)				Disk only or Disc & V-brake (Optional Roller Mount)		
Disc Brake Mount	IS				Post		
Recommended Max. Rotor Size in mm	160				180		
Dynamo Bracket Mount	yes				yes		
Cable Guide for Hub Dynamo	yes				yes		
Roller Brake Mount	Option				Option		
Weight (kgs) (w/steerer at 200mm)	1.33	1.33	1.18	1.18	1.7	1.7	
Wheel size	700C		700c		700C		
Recommended Max. Tire Width(mm)	45 (1.75 inch)		45 (1.75 inch)		51 (2.0 inch)		
Origin of Production	Taiwan				Taiwan		

					RIGID FORK	
	SS-A4-T	SS-A4	SS-A2-100	SS-A2-75	RF-M7	RF-M6
	28.6mm 7050 Aluminum (210mm length min.)	28.6mm 7050 Aluminum (210mm length min.)	28.6mm 7050 Aluminum (210mm length min.)	28.6mm 7050 Aluminum (210mm length min.)	28.6mm 7050 Aluminum	28.6mm 7050 Aluminum
	ALUMINUM	Aluminum	Aluminum	Aluminum	Magnesium	Magnesium
	9mm open dropout	9mm open dropout	9mm open dropout	9mm open dropout	9mm open dropout	9mm open dropout
	Alu. Blade Spring preload	Alu. Blade	Alu. Blade (straight) Dropout pitch 100mm	Alu. Blade (curve) Dropout pitch 75mm	Mag. Blade	Mag. Blade
	Coil with bumper	Coil with bumper	Coil with bumper	Coil with bumper	–	–
	P	–	–	–	–	–
	30mm	35mm	30mm	30mm	–	–
	43mm	43mm	38mm	34mm	43mm	43mm
	415	410	355	355	408	373
	Disc & V-brake		Disc & V-brake	V-brake	Disc & V-brake (Optional Roller Mount)	
	IS		IS		IS	
	160		160	–	160	
	yes		–	–	yes	
	yes		–	–	yes	
	–		–	–	yes	
	1.45	1.45	1.32	1.28	0.83	0.75
	24"		20"		700C	26"
	45 (1.75 inch)		38 (1.5 inch)		45 (1.75 inch)	45 (1.75 inch)
	Taiwan		Taiwan		Taiwan	

RST GLOBAL NETWORK

RST EUROPEAN TEST CENTRE SINGLTREK POD SMRKEM

http://www.singltrekpodsmrkem.cz/

RST E.CHINA JIANGSU, CHINA

Manufacturing (domestic)



- RST Global office
- RST Global distributors
- RST EUROPEAN TEST CENTRE SINGLTREK

RST HEADQUARTER, TAICHUNG, TAIWAN

Product development, Global sales, Manufacturing

Email: rst@rst.com.tw

RST EUROPE OFFICE. STUTTGART, GERMANY

After-Sales Service, Marketing, Europe sales

Contact: Stephan Guddat

Email: info@rst-europe.eu

RST DISTRIBUTORS

ARGENTINA
Carlos Karabitian
Tel : 54-351-4936060
Fax: 54-351-4931003
carlos@karabitian.com.ar

AUSTRIA
Thalinger Lange GMBH
Tel : 43-7242-497260
Fax: 43-7242-497401
mail@thalinger-lange.com

BENELUX
Cyclia bv
Tel : 31-(0)20-6692936
Fax: 31-(0)20-6154589
info@cyclia.nl

BRAZIL
LM BIKE
Tel :55-37-3262-5100
faleconosco@lmbike.com.br

CENTER AMERICA
DISTRIBUIDORA
OCHENTA Y SEIS S.A
TEL : 506-445-6669
FAX : 506-445-6185
info@superpro.ws

CHILE
ANDES Industrial Ltd.
Tel : 56-2-719-1100
Fax: 56-2-719-1136
andes@andesindustrial.cl

COLOMBIA
Len Importaciones
Tel : 57-7-671-2222
marcela@lenimp.com

CHINA
Suzhou Dawei Precision Co., Ltd.
Tel : 86-512-8616-0698
Fax: 86-512-8616-0100
services@rst-topway.cn

ESTONIA
Velo Plus.
Tel : 372-6-555-577
Fax: 372-6-556-308
info@veloplus.ee

FRANCE
RST-Paul Lange France SARL
Tel : 03-88-932101
Fax: 03-88-933432
paul.behnke@paul-lange.de

GERMANY
Paul Lange & Co.
Tel : 49-711-258802
Fax: 49-711-2588305
info@paul-lange.de

GREECE
Nikos Maniatopoulos S.A.
Tel : 30-2610-993045
Fax: 30-2610-990424
amarket@idealbikes.gr

HUNGARY
VELOBIKE Kft.
Tel: 36-1-455-8010
Fax:36-1-455-8019

INDONESIA
PT BINTANG TIMUR
Tel : 021-6300555
Fax: 021-6336982
bt@unitedbike

ISRAEL
Ranofun
Tel : 97-2545-600212
Fax: 972-8-9200061
ranofun@gmail.com

ITALY
Ciclo Promo Components SPA
Tel :39-0423-1996363
Fax:39-0423-1996364
info@ciclopromo.com

KOREA
MBS Corporation
Tel :82-55-265-9415
Fax:82-55-265-9419
elfama@elfama.com

PHILIPPINES
Comet Cycle Center
Tel :+63-2-375-5591
Fax:+63-2-375-5590
comet@pldtdsl.net

POLAND
Velo Sp. Z. O. O.
Tel : 48-32-232-83-77
Fax: 48-32-232-83-80
office@velo.com.pl

PORTUGAL
Motokit
Tel :351-234-625607
Fax:351-234-625608
mail@motokit.com.pt

RUSSIA
MAXIMUM Ltd.
Tel :+7-812-740-79-62
maximum@msgbox.ru

SPAIN
Matxcycle S.L
Tel : +34 943 340415
Fax: +34 943 340758
pedidos@mycycle.eu

SWITZERLAND
Fuchs-movesa AG
Tel : 62-865-66-06
Fax: 62-865-66-09
info@fuchs-movesa.ch

TAIWAN
RST GREENERGY
Technology Co.,Ltd.
Tel: 886-4-23250026
Fax: 886-4-23250028
rst@rst.com.tw

THAILAND
Asia international
Business&Sales Co., Ltd.
Tel : 66-2-887-7813-4
Fax: 66-2-448-3150
seema1@ksc.th.com

U.S.A
Quality Bicycle Products
Tel : 1-800-346-0004
Fax: 1-800-346-0211
sales@qbp.com

U.K.
Resurrection Cycle
Tel: 01792 421974
info@resurrectioncycles.co.uk

CZECH / SLOVAK REPUBLIC
Universe Agency spol. s.r.o
Tel : 420-244-990-777
Fax: 420-244-990-778
petr.fiala@author.cz



www.rstsuspension.com

RST
GLOBAL NETWORK

TAIWAN Head quarter
RST GREENERGY TECH. CO., LTD.
TEL +886.4.23250026
FAX +886.4.23250028
Email rst@rst.com.tw

EUROPE **RST Europe Office**
TEL +49.711.2588255
FAX +49.711.258827221
Email info@rst-europe.eu

CHINA **Suzhoun DaWei Precision Co., Ltd.**
TEL +86.512.86160698
FAX +86.512.86160100
Email services@rst-topway.cn

Design by **ARDE** #1070203 2018.05@3500

PHOTO ENDUROTEAM