Salsa

ADVENTURE BY BIKE



2019

Salsa
ADVENTURE BY BIKE

ADVENTURE BY BIKE

サイクリングライフにおいて、もっとも重要なことは、「自転車に乗ってなにかを感じる」こと。ペダルを踏み続けることでしか得られない経験を積み重ねることで、その後のサイクルライフ、いや、人生をも変化させるのです。そんな経験がどれだけ尊いことか。SALSAクルーの中にはわたしを含め、「製品の記憶よりも経験こそが大切」と考える者も少なからずいます。一言で経験といっても、そこにはサイクリストの数だけ、様々なシーンやスタイル、記憶が存在します。わたしたちは、そんなすべてのサイクリストの経験に敬意を表して【ADVENTURE BY BIKE】と表現しました。

あらゆる人が、自分のサイクルライフを変化させるような特別な経験をしたり、新しい経験ができる場所に導くための道具を作ることがわたしたちの使命なのです。【ADVENTURE BY BIKE】というのは単なるブランドスローガンや、体のいいキャッチコピーではありません。この言葉は、SALSAというブランドを導く「光」なのです。

そして、「ADVENTURE（冒険）」には、大きなことも小さなこともあることをわたしたちは知っています。新しいトレイルや抜け道を発見することも、あえて悪天候の中に走り出すことも、ともに「ADVENTURE（冒険）」なのです。個人の限界を超えようとすること、それまで想像もしなかった大きなことに挑むこと、普段はしないちょっとしたことを試しにやってみること。例えるなら、見知らぬ国を自転車で探検したり、人里離れた秘境をバイクパッキングすることもそう、ツーリング途中のランチで見知らぬ店に入ってみるとか、大都市を自転車で走り抜けることも、わたしたちはすべて「ADVENTURE（冒険）」と考えます。

【ADVENTURE BY BIKE】とは個人の成長の機会を約束してくれるもの。そしてそれを発見する手伝いをすることが、わたしたちの使命です。SALSA CYCLESとは、自らの経験により、モノづくりの根底に「経験を促進する（すなわち冒険）」というアイデンティティを据えたブランドなのです。

SALSA CYCLES MARKETING MANAGER MIKE RIEMER

BLACKBOROW GX EAGLE

完成車：￥388,000
フレームセット：￥198,000
サイズ：S, M, L



COMPONENT SIZING

Size	S	M	L
Stem Length	70mm	70mm	70mm
Crank Length	170mm	175mm	175mm
Handlebar Width	750mm	800mm	800mm
Seatpost Offset	12mm	12mm	12mm

BIKE SPEC

Frameset

Frame	Blackborow, mid-wheelbase
Fork	Kingpin
Color	Copper
Rear Shock	N/A

Drivetrain

Front Derailleur	N/A
Rear Derailleur	SRAM GX Eagle
Cassette	SRAM XG 1275 Eagle 10-50t
Chain	SRAM Eagle
Crankset	Truvativ Stylo 6K Eagle DUB Crankset with 30t ring
Shifter	SRAM GX Eagle
Brakes & Rotors	Hayes MX Comp mechanical, 180mm V-Series rotor

Components

Headset	Cane Creek 40
Stem	Salsa Guide Trail
Handlebar	Salsa Salt Flat
Grips	Salsa File Tread
Seatpost	Salsa Guide
Saddle	WTB Volt Sport

Wheels

Front Wheel	SUNringlé Mulefüt SL 80 27.5" x 80mm w/ SUNringlé SRC 150mm hub
Rear Wheel	SUNringlé Mulefüt SL 80 27.5" x 80mm w/ SUNringlé SRC 197mm hub
Tires	Maxxis Minion FBF front and FBR rear, 27.5 x 3.8", 60 tpi

Weight

Complete Bike Weight	M 17.5kg L 17.8kg

FRAM SPEC

Design Wheel/ Tire Size	26 x 3.8–4.33" on up to 100mm rim
Alternate Wheel/ Tire Sizes	27.5 x 3.0–3.8", 29 x 2.3–3.0"
Rigid Fork Length	483–486mm
Suspension Fork Length (Travel)	501–511mm (100mm)
Fork Offset	50–51mm
Headset-Upper	ZS44
Headset-Lower	ZS56
Seatpost	31.6mm
Seat Collar	35.0mm
Dropper Compatible	Yes, internal S/T and D/T
Front Derailleur Type	Compact 2x, top-pull only
Front Derailleur Mount	High direct-mount (55mm offset); FS1325
Bottom Bracket	100mm BSA, threaded
Crankset	Fat bike ~76mm chainline only, 1x and 2x compatible, 36t max ring
Rear Brake	51mm standard (140–180mm)
Rear Spacing	197 x 12mm thru-axle
Rear Thru-Axle	12 x 229L, TP = 1.5, TL = 20
Derailleur Hanger	FS2339
Bottle Mounts	3 per frameset (S/T front, S/T back, D/T)
Accessory Mounts	2 per frame (D/T bottom side, T/T top side)
Kickstand Plate	Yes, (KI5005 recommended, direct mount w/short bolt only, no clamp)
Rear Rack Mounts	Yes, Blackborow rack included
Rear Fender Mounts	Yes, flat-mount style only, fender not included

無限の想像力により最高の組み合わせを実現する、まさに"Dream Big" Cargo Fat Bike。フルサイズのパニアバッグを最大4個取り付け可能な専用リヤキャリア、トップチューブバッグマウント、4か所のボトル台座、リヤホイール前方のAnything Cageマウントに加え、あらたにデュアル3パックマウント付きのKingpin Carbonフォークが採用されています。軽量なアルミフレームにカーボンフォーク、ミッドホイールベースと27.5"ファットタイヤを組み合わせたBlackborowはただ荷物を運ぶだけでなく、オフロードツーリングでこそ真価を発揮します。バックカントリー、釣り、トレイルビルディング、キャンプなど、アイデア次第で様々な用途に使用できます。あなたが補給の無い過酷なルートを選択するとき、パッキングリストの一番上には常にBlackborowがあるはずです。

※積載制限84kg（リヤキャリアの積載制限は50kg）、車両総搭載重量191kgまで（ライダー＋積載物）





Frame Set

MUKLUK DEORE 1X

完成車:¥248,000
サイズ:XS, S, M, L, XL





その汎用性の高さから、多くの人に支持されるMukluk。十分なタイヤクリアランスとAlternator Dropoutの組み合わせにより、29×3.0"や27.5×4.0"など、複数のタイヤサイズにカスタム可能です。また、オプションのRack-Lockを使用することでAlternator 190 Rackのセットアップが可能となります。Anything CageやExpシリーズと組み合わせることで積載力を最大限に引き出し、"Omni Terra Tourer"なんて遊び方も楽しめます。
さあ、Muklukで地球を遊びつくしましょう。
Dream boldly!

COMPONENT SIZING

Size	XS	S	M	L	XL
Stem Length	40mm	50mm	60mm	70mm	80mm
Crank Length	170mm	170mm	170mm	175mm	175mm
Handlebar Width	750mm	750mm	750mm	750mm	750mm
Seatpost Offset	0mm	0mm	0mm	0mm	0mm

BIKE SPEC

Framese

Frame	Mukluk Aluminum
Fork	Bearpaw
Color	Dark Gray
Rear Shock	N/A

Drivetrain

Front Derailleur	N/A
Rear Derailleur	Shimano Deore Shadow Plus
Cassette	Shimano Deore 11-42t
Chain	Shimano CH-HG54
Crankset	Race Face Ride, direct mount 28t
Shifter	Shimano Deore 1x
Brakes & Rotors	SRAM Level, Centerline 160mm rotors

Components

Headset	Cane Creek 40
Stem	Salsa Guide Trail
Handlebar	Salsa Salt Flat / Rustler (size specific)
Grips	Salsa File Tread
Seatpost	Salsa Guide
Saddle	WTB Volt Sport

Wheels

Front Wheel	SUNringlé Mulefüt SL 80 26" x 80mm w/ SUNringlé SRC 150mm hub
Rear Wheel	SUNringlé Mulefüt SL 80 26" x 80mm w/ SUNringlé SRC 197mm hub
Tires	Maxxis Minion FBR 26 x 4.8", 60 tpi

Weight

Complete Bike Weight	M 14.9kg L 15.3kg

FRAME SPECS

Design Wheel/Tire Size	26 x 4.33" on up to 100mm rim
Alternative Wheel/Tire Sizes	26 x 3.8–4.8" on up to 100mm rim; 27.5 x 3.0–4.0"; 29 x 2.3–3.0"
Rigid Fork Length	483–486mm
Suspension Fork Length (Travel)	511mm (100mm)
Fork Offset	50–51mm
Headset-Upper	IS41
Headset-Lower	IS52
Seatpost	31.6mm
Seat Collar	35.0mm
Dropper Compatible (Routing)	Yes, internal
Front Derailleur Type	Compact 2x top-pull only
Front Derailleur Mount	High direct-mount (54mm offset)
Bottom Bracket	100mm, threaded
Crankset (Max Ring)	75mm chainline fat bike cranks only 2x: 36/24t max; 1x: 32t max
Rear Brake (Rotor)	51mm standard (160–180mm rotors). Must use 160mm rear IS adapter with +20mm post mount adapter for 180mm rotor
Rear Spacing	197 x 12mm thru-axle
Rear Axle Size	12 x 229L, TP = 1.5, TL = 20
Derailleur Hanger	FS1374
Bottle Mounts	2 per frame
Accessory Mounts	2 per frame
Stem Clamp	Ø28.6mm
Crown Race	Ø40mm
Front Brake (Rotor)	74mm post mount (160–180mm)
Front Spacing	150 x 15mm thru-axle
Front Thru-Axle	15 x 198L, TP = 1.5, TL = 9
Fork Bottle Mounts	2 Three-Pack bosses per fork

BUCKSAW GX1

完成車:¥479,000
サイズ:S, M



高強度と耐久性に優れた6066アルミニウム・フレーム仕様のBucksaw完成車です。ファットバイクの並外れたトラクションに、高性能フルサスペンション・マウンテンバイクのコントロール性能を併せたら、いったいどんなバイクになるのか？ その答が、このBucksawに集約されています。スプリットピボット・サスペンションによる極めてパワーロスが少ないペダリング性能に加えて、極太タイヤとサスペンションを組み合わせた振動吸収性とトラクションは、想像を絶する仕上がりとなりました。さらにこのフレームは、3サイズのホイールセットとコンパチブル（26x4.0"、27.5x3.0-3.25"、29x2.3-2.5"）の設計です。完成車購入後に異なるサイズのホイールセットを買い足すことで、まったく新しい走行フィーリングを楽しむことができます。

COMPONENT SIZING

Size	S	M
Stem Length	70mm	80mm
Crank Length	170mm	170mm
Handlebar Width	750mm	750mm
Seatpost Offset	0mm	0mm

BIKE SPEC

Frameset

Frame	Bucksaw Aluminum
Fork	RockShox Bluto RL 1 Stealth Solo Air 100mm
Color	Blue
Rear Shock	RockShox Monarch RT Debonair

Drivetrain

Front Derailleur	N/A
Rear Derailleur	SRAM GX
Cassette	SRAM XG 1150 10-42t
Chain	KMC X11
Crankset	SRAM GX 1200, X-SYNC 28t
Shifter	SRAM GX
Brakes & Rotors	SRAM DB5, G2CS 180mm

Components

Headset	Cane Creek 15
Stem	Salsa Guide
Handlebar	Salsa Rustler 3
Grips	Salsa Backcountry
Seatpost	Zoom 31.6 x 350mm set-back post
Saddle	WTB Volt Comp

Wheels

Front Wheel	Salsa 32h, 150mm, 15mm thru-axle, Surly Marge Lites, 2.0/1.8 spokes w/ brass nipples
Rear Wheel	Salsa 32h, 177mm, 12mm thru-axle, Surly Marge Lites, 2.0/1.8 spokes w/ brass nipples
Tires	45NRTH, Vanhelga 26 x 4.0", 60 tpi tubeless ready, folding

Weight

Complete Bike Weight	15.3kg for M-size set up tubeless

FRAME SPECS

Wheelsize	26" fat bike
Travel	100mm front and rear
Tire Clearance	Up to 26 x 4.0" tires on 82mm rims
Fork	Designed for 100mm, 50 offset RockShox Bluto suspension fat bike fork. 511mm max axle-to-crown
Headset-Upper	ZS44/28.6mm
Headset-Lower	ZS56/40mm
Rear Shock Size	184 x 44.5mm (7.25 x 1.75")
Rear Shock Mount Size	Front: 8 x 22mm; rear: 8 x 38mm
Seatpost	31.6mm
Seat Collar	35.0mm
Front Derailleur	High direct-mount; 2x compact; top-pull only
Bottom Bracket	PressFit 41 x 121mm
Crankset	Fat bike 1x or 2x compatible; max chainring sizes 1x (34t), 2x (36/24t)
Rear Brake	51mm I.S., minimum rotor size 140mm, maximum rotor size 180mm
Rear Spacing	177 x 12mm thru-axle
Bottle Mounts	1 per frame
Derailleur Hanger	FS2322. Split Pivot Dropout Tool Top Cap available for field repairs.
Rear Thru-Axle	12 x 217L, TP = 1.75 TL = 20
Cable Routing	Full length housing; 1x, 2x, moto/regular, and dropper/stealth dropper routing compatible

TIMBERJACK DEORE 27.5+

完成車：¥159,800
フレーム：¥59,800
サイズ：XS, S, M, L, XL



Timberjackはシングルトラックの限界を広げたり、Bikepackingで未開拓の場所への到達を可能にします。Timberjackは、モダンなトレイルバイクの形状、軽快なコーナリングのための短いチェーンステイ、29インチまたは27.5+のホイールとタイヤを装着できる余裕のクリアランスを特長としています。Alternator Dropout採用でリヤセンターを調整できるほか、Boost ReductionやAlternator Plateを交換することで、3種類のエンド幅に対応できます。スルーアクスルAlternator Plateで148mm Boost規格に対応し、スルーアクスルAlternator Plate+Boost Reduction Kitの組み合わせで142mm対応に。さらにQR Alternator Plateを使えば、141mmQR Boostとなり、QR Alternator Plate+Boost Reduction Kitを使うことで135mm QRにも対応できます。Bikepacking仕様へのカスタムには、フロント側の積載力を稼げるAnything Cageに対応したFirestarter Forkへの交換を推奨します。2019年モデル完成車は、ドロッパーポストを標準装備。
MTBエントリーユーザーといえども、本物を求めるあなたにこそふさわしい1台です。



Frame

COMPONENT SIZING

Size	XS	S	M	L	XL
Stem Length	60mm	60mm	60mm	60mm	60mm
Crank Length	170mm	170mm	175mm	175mm	175mm
Handlebar Width	750mm	750mm	750mm	800mm	800mm
Seatpost Offset	0mm	0mm	0mm	0mm	0mm

BIKE SPEC

Frameset

Frame	Timberjack Aluminum
Fork	SR Suntour XCR 34 Air LOR 130mm travel, 15x110mm
Color	Teal（完成車）, Black（フレーム）
Rear Shock	N/A

Drivetrain

Front Derailleur	N/A
Rear Derailleur	Shimano Deore
Cassette	Shimano Deore 11-42t
Chain	Shimano HG54
Crankset	Race Face Ride, 30t
Shifter	Shimano Deore
Brakes & Rotors	Shimano MT201, 180mm front and 160mm rear rotors

Components

Headset	Cane Creek 10
Stem	Salsa Guide Trail
Handlebar	Salsa Salt Flat (XS, SM) Rustler (MD, LG, XL)
Grips	Salsa File Tread
Seatpost	TranzX JD-YSP15L, 0mm offset
Saddle	WTB Volt Sport

Wheels

Front Wheel	WTB 15 x 110mm, WTB ST i40 TCS 2.0 27.5"
Rear Wheel	WTB 10 x 141mm QR, WTB ST i40 TCS 2.0 27.5"
Tires	WTB Ranger Comp 27.5 x 2.8"

Weight

Complete Bike Weight	13.9kg	M

FRAME SPECS

Design Wheel/Tire Size	27.5 x 3.0" max. (at 427mm rear center)
Alternative Wheel/Tire Size	29 x 2.6 max. (at 427 rear center)
Suspension Fork Length (Travel)	511–541mm (100–130mm)
Rigid Fork Length	483–502mm
Fork Offset	45–51mm
Headset-Upper	ZS44
Headset-Lower	ZS56
Seatpost	30.9mm
Seat Collar	35.0mm
Dropper Compatible (Routing)	Yes
Front Derailleur Mount	148mm rear spaced: high direct mount (29mm offset) via 34.9mm clamp Problem Solvers Bracket (FS1328) 142mm rear spaced: high direct mount (26.5mm offset) via 34.9mm clamp Problem Solvers bracket (FS1323)
Bottom Bracket	73mm BSA, threaded
Crankset (Max Ring)	1x crankset: 32t max. Boost or 30t max. Non-Boost, 2x crankset: 36/24t max.Boost and 36/24t Non-Boost
Rear Brake (Rotor)	51mm I.S., (160–180mm)
Rear Spacing	148mm; 142/135mm capable w/ Alternator Reduction Plates (FS2360)
Rear Axle Size	12 x 180L, TP = 1.75, TL = 20
Derailleur Hanger	QR = FS1312; TA = FS1374; SS = FS1318; SSTA = FS1375; L Rohloff = FS1371; TA Kit = FS1370
Rack Mounts	Yes w/ Alternator Rack System
Fender Mounts	No
Stem Clamp	28.6mm
Crown Race	40mm
Front Brake (Rotor)	N/A
Front Spacing	N/A

TIMBERJACK TI FRAME

¥338,000

サイズ: XS, S, M, L, XL



FRAME SPECS

Design Wheel/Tire Size	27.5 x 3.0" max (at 427mm rear center)
Alternative Wheel/Tire Size	29 x 2.6" max (at 437mm rear center)
Suspension Fork Length (Travel)	511–541mm (100–130mm)
Rigid Fork Length	483–502mm
Fork Offset	45–51mm
Headset-Upper	ZS44
Headset-Lower	EC44
Seatpost	31.6mm
Seat Collar	35mm
Dropper Compatible (Routing)	Yes
Front Derailleur Mount	148mm rear spacing: high direct mount (29mm offset) Problem Solvers Bracket (FS1328) 142mm rear spacing: high direct mount (26.5mm offset) via 34.9mm clamp Problem Solvers Bracket (FS1323)
Bottom Bracket	73mm BSA, threaded
Crankset (Max Ring)	1x crankset: 32t max.BOOST or 30t max. Non-BOOST, 2x crankset: 36/24t max. BOOST
Rear Brake (Rotor)	51mm I.S., (160–180mm)
Rear Spacing	148mm or 142mm thru-axle 135mm QR with Alternator Reduction Plates
Rear Axle Size	148mm rear spacing: 12 x 180L, TP = 1.75, TL = 20 142mm rear spacing: 12 x 174L, TP = 1.75, TL = 20 135mm rear spacing: quick-release
Derailleur Hanger	QR = FS1312 TA = FS1374 SS = FS1318 SSTA = FS1375 Rohloff = FS1371 TA Kit = FS1370
Rack Mounts	Yes, via Alternator Rack System
Fender Mounts	No
Frame Weight	2.13kg for M-size w/ Lip-Lock

シングルトラックの限界を広げたり、Bikepackingで未開拓の場所への到達を可能にする人気のハードテールモデル=Timberjackのチタンフレームモデル。アルミバージョンのTimberjackと同様に、モダンなトレイルバイクの形状を採用し、ショートチェーンステイ、29インチまたは27.5+のホイールセットに対応する余裕のタイヤクリアランスを特長としています。そこに、さらなる軽量化、しなやかさ、耐久性を加えたのがTiです。

FARGO TIAGRA

完成車:¥248,000
フレームセット:¥132,000
サイズ:XS, S, M, L, XL





Frame Set

COMPONENT SIZING

Size	XS	S	M	L	XL
Stem Length	60mm	70mm	70mm	80mm	80mm
Crank Length	170mm	170mm	175mm	175mm	175mm
Handlebar Width	42cm	44cm	44cm	46cm	46cm
Seatpost Offset	12mm	12mm	12mm	12mm	12mm

BIKE SPEC

Frameset

Frame	Fargo
Fork	Firestarter 110
Color	Orange(完成車)、Black(フレームセット)
Rear Shock	N/A

Drivetrain

Front Derailleur	Shimano Deore
Rear Derailleur	Shimano Tiagra
Cassette	Shimano CS-HG500, 11-34t
Chain	Shimano CN-HG54
Crankset	Shimano M6000 Deore, 36/26t
Shifter	Shimano Tiagra
Brakes & Rotors	TRP Spyre-C, 160mm rotors

Components

Headset	Cane Creek 15
Stem	Salsa Guide
Handlebar	Salsa Woodchipper
Grips	Salsa Gel Cork Bar Tape
Seatpost	Salsa Guide, 18mm offset
Saddle	WTB Sport

Wheels

Front Wheel	Novatec 15 x 110mm, WTB ST i29 TCS 2.0, 32h 2.0 spokes w/ brass nipples
Rear Wheel	Novatec 141 mm QR, WTB ST i29 TCS 2.0, 32h 2.0 spokes w/ brass nipples
Tires	Maxxis Ikon 2.6", 60 TPI/EXO/TR

Weight

Complete Bike Weight	M 12.7kg L 13.1kg

FargoはSalsaのオリジナルドロップバーマウンテンバイクです。多面的にあらゆるルートを取ることと、何日もの間、外出するときに必要なものすべてを運ぶ能力を望む"混在サーフェスライダー"と"バイクパッカー"のために設計されたカルトクラシックです。2019年モデルより、Firestarter 110 Deluxe forkにアップグレード。フロントハブもBoost規格となり、カーボンフォークでありながら3パックマウント、ローライダーラックマウント、インターナルダイナモケーブルルーティング、フェンダーマウントを備えています。オリジナルMTBドロップジオメトリーとSalsa Woodchipper Barの組み合わせは、舗装路からトレイルまで様々な路面を走破可能。タイヤサイズは、27.5+、29+にも対応(S-XLサイズ)します。さらに、Alternator Dropout V1.5を採用することで、リヤセンターを調整できるほか、ベルトドライブにも対応します。また、Boost Reduction KitやAlternator Plateの交換により幅広いエンド幅に対応します。たとえば、スルーアクスルAlternator Plateでは、148mm Boost規格に対応し、スルーアクスルAlternatorPlate+Boost Reduction Kitを使えば142mmにも対応。QR Alternator Plateを使った場合には、141mm QR Boostとなり、QR Alternator Plate+Boost Reduction Kit使用時には135mmQR対応となります。そのほか、積載力を高めるSalsa Anything CageやExp Anything Cradleを使用すればバイクパッキングも思いのままです。さあ、あなただけのルートで自由な旅に出掛けましょう。GO FAR!

FRAME SPECS

Design Wheel / Tire Size	29 x 2.4"
Alternative Wheel/ Tire Size	27.5 x 3.0", 29 x 2.4" w/ fender (29 x 3.0" only compatible on S–XL frame sizes)
Suspension Fork Length (Travel)	501–511mm (100mm)
Rigid Fork Length	483–486mm
Fork Offset	45–51mm
Headset-Upper	ZS44
Headset-Lower	EC44
Seatpost	27.2mm
Seat Collar	30mm
Front Derailleur Mount	148mm rear spaced: high direct mount (29mm offset) Problem Solvers Bracket (FS1328) 142mm rear spaced: high direct mount (26.5mm offset) via 28.6mm clamp Problem Solvers Bracket (FS1326)
Bottom Bracket	73mm BSA, threaded
Crankset (Max Ring)	1x crankset: 36t max Boost & 34t non-Boost or 46t Gates Belt Drive Sprocket, 2x crankset: 42/28t max Boost & Non-Boost
Rear Brake, (Rotor)	51mm I.S. (160–180mm)
Rear Spacing	148 or 142mm thru-axle 135mm QR w/ Alternator reduction plates
Rear Axle Size	148mm rear spaced: 12 x 180L, TP = 1.75, TL = 20 142mm rear spaced: 12 x 174L, TP = 1.75, TL = 20 135mm rear spaced: quick release 142 & 135mm spacing require the use of Salsa Alternator Reduction plates (FS2360)
Derailleur Hanger	QR = FS1312; TA = FS1385 (1.75TP with fender mount); SS = FS1318; SSTA = FS1375; L Rohloff = FS1371
Fender Mounts	Yes
Rack Mounts	Yes
Bottle Mounts	XS = 2, S–XL = 3
Stem Clamp	28.6mm
Crown Race	40mm
Front Brake (Rotor)	74mm post mount (160–180mm)
Front Spacing	110 x 15mm thru-axle
Front Axle	ø15 x 135, TP=1.5, TL=12
Bottle Mounts	4 (3-Pack config)

FARGO TI FRAMESET

フレームセット:¥388,000
サイズ:XS, S, M, L, XL



Salsa Cycles が提唱する"Adventure by Bike"のシンボルといっても過言ではないFargoのチタンモデル。オンロードから、グラベル、そして、シングルトラックまで、キャンピングギアを積んだままで駆け抜けられるスーパーバイクです。チタン独特のしなやかさと軽さが、ハードな路面を好むサイクリストの体を優しくサポートします。チタンフレームに加え、軽く、乗り心地が良く、しかも、積載力まで備えたカーボンフォークをセットアップすることで、夢のバイクパッキングフレームセットが完成しました。お気に入りのホイールサイズを選び、こだわりのパーツを搭載し、自分だけの1台を完成させてください。心の中の野生を解き放ちたい、ならばFargoできまりです。

FRAME SPECS

Design Wheel/Tire Size	29 x 2.4"
Alternative Wheel/Tire Size	27.5 x 3.0" 27.5 x 2.2" with fender 29 x 3.0" (S - XL) 29 x 3.0" (S - XL)
Suspension Fork Length (Travel)	501–511mm (100 mm)
Rigid Fork Length	483–486mm
Fork Offset	45-51mm, Firestarter Carbon Boost (15 x 110 mm) fork features 51mm offset
Front Brake (Rotor)	180mm maximum rotor size
Headset-Upper	ZS44
Headset-Lower	EC44
Seatpost	27.2mm
Seat Collar	32mm
Front Derailleur Mount	148mm rear spacing: high direct-mount (29mm offset) Problem Solvers Bracket (FS1328) 142mm rear spacing: high direct-mount (26.5mm offset) via 34.9mm clamp Problem Solvers Bracket (FS1323)
Bottom Bracket	73mm BSA, threaded
Crankset (Max Ring)	1x crankset: 36t max Boost and 34t non-boost or 46t Gates Belt Drive sprocket, 2x crankset: 42/28t max Boost and Non-Boost
Rear Brake (Rotor)	51mm I.S. (160–180mm)
Rear Spacing	148 or 142mm thru-axle 135mm QR w/ Alternator reduction plates
Rear Axle Size	148mm rear spaced: 12 x 180L, TP = 1.75, TL = 20 142mm rear spaced: 12 x 174L, TP = 1.75, TL = 20 135mm rear spaced: quick release 142 & 135mm spacing require the use of Salsa Alternator Reduction plates (FS2360)
Derailleur Hanger	QR = FS1312; TA = FS1385; SS = FS1318; SSTA = FS1375; L Rohloff = FS1371
Frameset Weight	2.84kg for size L w/ fork and Lip-Lock

JOURNEYMAN CLARIS 650

完成車：￥128,000

サイズ：50, 52, 54, 55.5, 57, 59.5cm





グラベルライドからライトツーリングまで、多様さが魅力のJourneyman。2019モデルでは、Claris 650B、Sora 700Cの2タイプの完成車をラインアップしました。トップチューブとダウンチューブには、SalsaがWarbirdのために開発したカスタムチュービングを使用。シートステー、チェーンステー、ドロップアウトには強度と耐久性に優れた6061-T6アルミが採用されています。Vaya、Warbirdをベースに開発されたジオメトリーは、快適性と安定性に優れ、街中から見知らぬダートの探索までを軽快にこなします。700x50Cを飲み込む余裕のタイヤクリアランスは650x56Bにも対応し、舗装路、未舗装路を問わずに走破することが可能です。フレームには、キャリア、フェンダー、トップチューブバッグアイレットを備え、付属のFantail Forkには3パックマウント、クラウンライトマウント、ミッドブレード・フェンダーアイレットを備えており、バイクパッキングから4サイドまで様々なツーリングスタイルにも対応します。Jouneymanの多様なフレームスペックは、あなたの"日常"を"冒険"に変えてくれることでしょう。

COMPONENT SIZING

Size	50cm	52cm	54cm	55.5cm	57cm	59.5cm
Stem Length	60mm	70mm	80mm	80mm	90mm	100mm
Crank Length	165mm	165mm	170mm	172.5mm	175mm	175mm
Handlebar Width	38cm	40cm	42cm	42cm	44cm	46cm
Seatpost Offset	12mm	12mm	12mm	12mm	12mm	12mm

BIKE SPEC

Frameset

Frame	Journeyman Drop Bar
Fork	Fantail Fork with Three-Pack Mounts
Color	Dark Olive
Rear Shock	N/A

Drivetrain

Front Derailleur	Shimano Claris
Rear Derailleur	Shimano Claris GS 8-speed
Cassette	SunRace 8-speed, 11-34t
Chain	KMC X8
Crankset	FSA Tempo Adventure, 46/30t
Shifter	Shimano Claris
Brakes & Rotors	Promax DSK-330R flat mount 160mm

Components

Headset	VP Sealed Bearing
Stem	Salsa Guide
Handlebar	Salsa Cowbell
Grips	Salsa Gel Cork Bar Tape
Seatpost	27.2 x 350mm
Saddle	WTB Volt Sport 142

Wheels

Front Wheel	Formula, 32h, 100mm, WTB STP i23 TCS 650b, 2.0mm spokes, brass nipples
Rear Wheel	Formula, 32h, 135mm, WTB STP i23 TCS 650b, 2.0mm spokes, brass nipples
Tires	WTB Nano 27.5 x 2.1" Comp

Weight

Complete Bike Weight	12.25kg for size 55.5cm

FRAME SPECS

Tire Size Range for 622/700c/29"Wheels	32–51mm (1.26–2.0")
Tire Size Range for 584/650b/27.5"Wheels	47–57mm (1.85–2.2")
Tire Size Range for 559/26"Wheels	559/26" is Not Compatible
Maximum Wheel/Tire Diameter	727mm (28.6")
Minimum Wheel/Tire Diameter	684mm (26.9")
Rigid Fork Length	405mm
Fork Offset	50mm
Headset-Upper	IS41
Headset-Lower	IS47
Seatpost	27.2mm
Seat Collar	32.0mm
Front Derailleur Mount	34.9mm OD, bottom pull
Bottom Bracket	68mm BSA
Crankset (Max Ring)	1x crankset: 46t max, 2x crankset: 52/36t max, 3x crankset: 53/39/30t max
Rear Brake (Rotor)	Flat mount (140–160mm)
Rear Spacing	135mm
Rear Axle Size	10 x 135mm, QR
Derailleur Hanger	959 hanger
BB Cable Guide	06-000682
Fender Mounts	Yes
Rack Mounts	Yes
Stem Clamp	28.6mm
Crown Race	33mm
Front Brake (Rotor)	140–160mm
Front Spacing	100mm
Front Axle	9 x 100mm, QR

JOURNEYMAN SORA 700

完成車：￥159,800

サイズ：50, 52, 54, 55.5, 57, 59.5cm





COMPONENT SIZING

Size	50cm	52cm	54cm	55.5cm	57cm	59.5cm
Stem Length	60mm	70mm	80mm	80mm	90mm	100mm
Crank Length	165mm	165mm	170mm	172.5mm	175mm	175mm
Handlebar Width	38cm	40cm	42cm	42cm	44cm	46cm
Seatpost Offset	12mm	12mm	12mm	12mm	12mm	12mm

BIKE SPEC

Frameset

Frame	Journeyman Drop Bar
Fork	Fantail Deluxe Carbon Fork with Three-Pack Mounts
Color	White
Rear Shock	N/A

Drivetrain

Front Derailleur	Shimano Sora
Rear Derailleur	Shimano Sora 9-speed
Cassette	Sunrace 9-speed, 11-34t
Chain	KMC X9
Crankset	FSA Vero Pro Adventure, 46/30t
Shifter	Shimano Sora
Brakes & Rotors	Promax DSK-330R flat mount 160mm

Components

Headset	VP sealed bearing
Stem	Salsa Guide
Handlebar	Salsa Cowbell
Grips	Salsa Gel Cork Bar Tape
Seatpost	27.2 x 350mm
Saddle	WTB Volt Sport 142

Wheels

Front Wheel	Formula, 32h, 100mm, WTB STP i19 TCS 700c, 2.0mm spokes, brass nipples
Rear Wheel	Formula, 32h, 135mm, WTB STP i19 TCS 700c, 2.0mm spokes, brass nipples
Tires	WTB Riddler 700 x 37mm Comp

Weight

Complete Bike Weight	11.17kg for size 55.5cm

FRAME SPECS

Tire Size Range for 622/700c/29" Wheels	32–51mm (1.26–2.0")
Tire Size Range for 584/650b/27.5" Wheels	47–57mm (1.85–2.2")
Tire Size Range for 559/26" Wheels	559/26" is Not Compatible
Maximum Wheel/Tire Diameter	727mm (28.6")
Minimum Wheel/Tire Diameter	684mm (26.9")
Rigid Fork Length	405mm
Fork Offset	50mm
Headset-Upper	IS41
Headset-Lower	IS47
Seatpost	27.2mm
Seat Collar	32.0mm
Front Derailleur Mount	34.9mm OD, bottom pull
Bottom Bracket	68mm BSA
Crankset (Max Ring)	1x crankset: 46t max, 2x crankset: 52/36t max, 3x crankset: 53/39/30t max
Rear Brake (Rotor)	Flat mount (140–160mm)
Rear Spacing	135mm
Rear Axle Size	10 x 135mm, QR
Derailleur Hanger	959 hanger
BB Cable Guide	06-000682
Fender Mounts	Yes
Rack Mounts	Yes
Stem Clamp	28.6mm
Crown Race	33mm
Front Brake (Rotor)	140–160mm
Front Spacing	100mm
Front Axle	9 x 100mm, QR

VAYA 105

完成車：¥238,000
フレームセット：¥118,000
サイズ:49.5, 52, 54, 55, 57, 59.5cm



舗装路からグラベルまで、あらゆる路面をカバーするVaya。Vayaには、Salsaによってデザインされた Sanko Kung-Fuクロモリ・チュービングが使用されています。Kung-Fuチューブは、トリプルバテッド・シームレスチュービングで、フレームサイズごとに最適なブレンドのチューブが選定されています。チューブの選定と考え抜かれたVayaのジオメトリーは、荷物の有無にかかわらず、つねに軽快な走りを実現します。2019年モデルよりフロントフォークが、Waxwing frokへアップデードしました。カーボンフォークでありながら、3パックマウント、ローライダーラックマウント、インターナルダイナモケーブルルーティング、フェンダーマウントを備えています。また、最大50mmのタイヤクリアランス（フェンダーなし）は、好みに応じてタイヤを履き替えることで、トラクションと快適性を得ることが可能です。Vayaは、まさにExtreme Versatile（極めて多用途な）Machineといえるでしょう。

COMPONENT SIZING

Size	49.5cm	52cm	54cm	55cm	57cm	59.5cm
Stem Length	60mm	70mm	80mm	80mm	90mm	100mm
Crank Length	165mm	165mm	170mm	172.5mm	175mm	175mm
Handlebar Width	38cm	40cm	42cm	42cm	44cm	46cm
Seatpost Offset	12mm	12mm	12mm	12mm	12mm	12mm



Frame Set

BIKE SPEC

Frameset

Frame	Vaya Kung Fu CroMoly
Fork	Waxwing
Color	Purple（完成車）、Black（フレームセット）
Rear Shock	N/A

Drivetrain

Front Derailleur	Shimano 105 R7000
Rear Derailleur	Shimano 105 R7000
Cassette	Shimano HG70011 11-speed, 11-34t
Chain	Shimano HG601-11
Crankset	FSA Omega Adveture 48/32t
Shifter	Shimano 105 R7000
Brakes & Rotors	TRP Spyre-C, 160mm rotors

Components

Headset	Cane Creek 10
Stem	Salsa Guide
Handlebar	Salsa Cowbell
Grips	Salsa Gel Bar Tape
Seatpost	Salsa Guide
Saddle	WTB Volt

Wheels

Front Wheel	Novatec 32h, 12 x 100mm, WTB ST i19 TCS 2.0 700c
Rear Wheel	Novatec 32h, 135mm QR, WTB ST i19 TCS 2.0 700c
Tires	WTB Riddler TCS Light/Fast Rolling, tan sidewall

Weight

Complete Bike Weight	55cm	11.17kg	57cm	11.28kg

FRAME SPECS

Design Wheel/Tire Size	700c x 50mm w/o fenders
Alternate Wheel/ Tire Size	700c x 45mm w/ fenders
Fork Length	405mm
Fork Offset	50mm
Headset-Upper	ZS44
Headset-Lower	EC44
Seatpost	27.2mm
Seat Collar	30mm
Front Derailleur Mount	Band clamp, 28.6mm, bottom pull
Bottom Bracket	68mm BSA, threaded
Crankset (Max Ring)	1x crankset: 46t max, 2x crankset: 53/39t max, 3x crankset: 53/39/30t max
Rear Brake (Rotor)	51mm standard, (140–160mm)
Rear Spacing	135mm
Rear Axle Size	10 x 135mm QR
Derailleur Hanger	FS2310
Rack Mounts	Yes
Fender Mounts	Yes, only compatible with QR fenders
Bottle Mounts	3
Stem Clamp	28.6mm
Crown Race	40mm 36° integrated crown race
Front Brake (Rotor)	Flat mount 160, flat mount rear standard 35mm thickness, 42mm bolt length
Front Spacing	100mm
Front Axle	Carbon fork: thru-axle, M12 x 125 L, TP=1.5, TL=20mm

MARRAKESH FRAMESET

フレームセット：¥98,000
サイズ:49.5, 52, 54, 55, 57, 59.5cm



Salsaのワールドツーリングモデルに位置づけられるMarrakesh。クロモリフォークには、前後フェンダー&キャリアダボ、3パックマウントを装備。タイヤクリアランスは、フェンダー無しで700×50.8mmまで、フェンダー付きで700×40mmまでと、幅広いタイヤの互換性を誇ります。さらにフレームには、BB後方のスタンド台座、チェーンステーのスポークホルダー、汎用性の高いAlternator Endplateを備えます。懐の深いMarrakeshですから、本来のツーリングという枠にとらわれず、フェンダー、キャリア、ハブダイナモ、内装変速ハブ、センタースタンドなどを装備したコミューター仕様に組み上げて、Cultural Exploration(寺社仏閣巡りなど、歴史的、文化的な土地の探索)するのも良いでしょう。あなた仕様のMarrakeshを組み上げて、休日に文化探索というスパイスを加えてみませんか？

FRAME SPECS

Frame	Marrakesh Cobra Kai CroMoly
Fork	Marrakesh CroMoly
Color	Black
Rear Shock	N/A
Headset	Cane Creek 10
Frameset Weight	3.8kg - 55cm frame and fork
Design Wheel/ Tire Size	700 x 40mm max w/ fenders
Alternate Wheel/ Tire Size	700 x 50.8mm w/o fenders
Rigid Fork Length	415mm
Fork Offset	55mm
Headset-Upper	EC44
Headset-Lower	EC44
Seatpost	27.2mm
Seat Collar	30.0mm
Front Derailleur Type	Bottom pull
Front Derailleur Mount	Band clamp (Ø31.8mm)
Bottom Bracket	68mm BSA, threaded
Crankset	Mountain touring triple: 48/38/26t; any mountain 2x or 1x option available
Rear Brake (Rotor)	51mm I.S. mount, (160–180mm)
Rear Spacing	135 x 10mm QR
Derailleur Hanger	QR = FS1372, L Rohloff = FS1371
Bottle Mounts	3
Stem Clamp	Ø28.6mm
Crown Race	Ø30mm
Front Brake (Rotor)	51mm standard, (160–180mm)
Front Spacing	100 x 9mm QR
Rack/Bottle Mounts	Three-Pack boss set on each leg and 165mm standard low rider boss set on each leg (cannot be used simultaneously)



BLACBOROW

Size	S	M	L
Recommended Rider Height	168–175cm	175–183cm	183–190cm
A. Toptube Effective	580.0mm	610.0mm	640.0mm
B. Seat Tube Length	457mm	457.0mm	508.0mm
C. Headtube Angle	69.0°	69.0°	69.0°
D. Seat Tube Angle	73.0°	73.0°	73.0°
E. BB Drop	60mm	60mm	60mm
F. Chainstay Length	650mm	650mm	650mm
G. Headtube Length	110mm	120mm	130mm
H. Fork Length	483mm	483mm	483mm
J. Fork Offset	51mm	51mm	51mm
K. Wheelbase	1305.6mm	1336.4mm	1367.1mm
M. Stack	599.1mm	608.4mm	617.7mm
N. Reach	396.8mm	424.0mm	451.1mm
P. Standover	704.0mm	737.0mm	763.0mm

Measurements based on:

A Salsa Kingpin fork which is equivalent to an average 100mm fat bike suspension fork at 25% sag

A 26 x 4.33" tire measuring 746mm in diameter

Standover (P) is measured from vertically from the ground to top of toptube, 50mm forward of the BB center

BUCKSAW

Size	S	M
Recommended Rider Height	165–175cm	175–183cm
A. Toptube Effective	590mm	610mm
B. Seat Tube Length	387mm	432mm
C. Headtube Angle	67.7°	67.7°
D. Seat Tube Angle	73.5°	73.5°
E. BB Drop	26.2mm	26.2mm
F. Chainstay Length	444mm	444mm
G. Headtube Length	100mm	110mm
H. Fork Length	511mm	511mm
J. Fork Offset	50mm	50mm
K. Wheelbase	1142.7mm	1163.8mm
M. Stack	575.9mm	585.2mm
N. Reach	419.4mm	436.7mm
P. Standover	729.0mm	729.0mm

Measurements based on:

An unsprung bike (no sag)

A 100mm RockShox Bluto suspension fork

A 26 x 3.8" tire measuring 742mm in diameter

Standover (P) measured vertically from the top of the top tube/ brace intersection

MUKLUK

Size	XS	S	M	L	XL
Recommended Rider Height	157–168cm	165–175cm	173–183cm	180–191cm	188–UP
A. Toptube Effective	573.0mm	594.0mm	615.0mm	636.0mm	657.0mm
B. Seat Tube Length	381mm	406mm	457mm	508mm	558mm
C. Headtube Angle	69°	69°	69°	69°	69°
D. Seat Tube Angle	73°	73°	73°	73°	73°
E. BB Drop	63mm	63mm	63mm	63mm	63mm
F. Chainstay Length	440–457mm	440–457mm	440–457mm	440–457mm	440–457mm
G. Headtube Length	100mm	110mm	120mm	130mm	140mm
H. Fork Length	483mm	483mm	483mm	483mm	483mm
J. Fork Offset	51mm	51mm	51mm	51mm	51mm
K. Wheelbase	1085.2mm	1107.0mm	1128.7mm	1150.4mm	1172.1mm
M. Stack	592.7mm	602.1mm	611.4mm	620.7mm	630.1mm
N. Reach	391.8mm	409.9mm	428.1mm	446.2mm	464.4mm
P. Standover	684.5mm	678.1mm	719.7mm	758.0mm	773.9mm

Measurements based on:

A Salsa Kingpin fork which is equivalent to a 100mm RockShox Bluto fork at 25% sag

A 26 x 4.8" tire measuring 759mm in diameter

Standover is measured from ground to top of toptube at forward portion of the kink

TIMBERJACK ■27.5 x 2.8" with 130 mm Suspension Fork

Size	XS	S	M	L	XL
Recommended Rider Height	157cm–168cm	160–175cm	173cm–183cm	180cm–191cm	188cm–UP
A. Toptube Effective	570mm	592mm	612mm	642mm	672.0mm
B. Seat Tube Length	355.6mm	381.0mm	431.8mm	482.6mm	533.4mm
C. Headtube Angle	67.4°	67.4°	67.4°	67.4°	67.4°
D. Seat Tube Angle	73.0°	73.0°	73.0°	73.0°	73.0°
E. BB Drop	54mm	54mm	54mm	54mm	54mm
F. Chainstay Length	420–437mm	420–437mm	420–437mm	420–437mm	420–437mm
G. Headtube Length	100mm	100mm	110mm	120mm	135mm
H. Fork Length	509mm	509mm	509mm	509mm	509mm
J. Fork Offset	42mm	42mm	42mm	42mm	42mm
K. Wheelbase	1078–1095mm	1098–1115mm	1119–1136mm	1150–1167mm	1182–1199mm
M. Stack	603mm	603mm	612mm	622mm	636mm
N. Reach	387mm	407mm	425mm	452mm	478mm
P. Standover	686mm	702mm	741mm	778mm	815mm

Measurements based on:

509 x 42 mm offset fork based on 130 mm [541 mm/29/27.5+] fork at 25% sag.

27.5 x 2.8" tire measuring 717 mm in diameter.

Standover (P) for all sizes is measured vertically to top of toptube from a position 50mm forward of BB center.

TIMBERJACK TI ■Geometry with 120mm Suspension Fork & 27.5 x 2.8" Tires

Size	XS	S	M	L	XL
Recommended Rider Height	157cm–168cm	160cm–175cm	173cm–183cm	180cm–191cm	188cm–UP
A. Toptube Effective	570mm	590mm	610mm	640mm	670mm
B. Seat Tube Length	355.6mm	381.0mm	431.8mm	482.6mm	533.4mm
C. Headtube Angle	68.0°	68.0°	68.0°	68.0°	68.0°
D. Seat Tube Angle	73.6°	73.6°	73.6°	73.6°	73.6°
E. BB Drop	58mm	58mm	58mm	58mm	58mm
F. Chainstay Length	420–437mm	420–437mm	420–437mm	420–437mm	420–437mm
G. Headtube Length	100mm	100mm	110mm	120mm	135mm
H. Fork Length	500mm	500mm	500mm	500mm	500mm
J. Fork Offset	51mm	51mm	51mm	51mm	51mm
K. Wheelbase	1083–1100mm	1103–1120mm	1124–1141mm	1155–1172mm	1187–1204mm
M. Stack	599mm	599mm	608mm	617mm	631mm
N. Reach	394mm	414mm	431mm	458mm	484mm
P. Standover	679mm	695mm	735mm	772mm	809mm

Measurements based on:

500 x 51 mm offset fork based on 120 mm [530 mm/29/27.5+] fork at 25% sag.

27.5 x 2.8" tire measuring 717 mm in diameter.

Standover (P) for all sizes is measured vertically to top of toptube from a position 50mm forward of BB center.

FARGO

Size	XS	S	M	L	XL
Recommended Rider Height	150cm–160cm	160cm–175cm	173cm–183cm	180cm–191cm	188cm–UP
A. Toptube Effective	520mm	540mm	565mm	590mm	600mm
B. Seat Tube Length	355.6mm	406.4mm	457.2mm	508.0mm	558.8mm
C. Headtube Angle	68.5°	69°	69°	69°	69°
D. Seat Tube Angle	74°	74°	73°	73°	73°
E. BB Drop	70mm	70mm	70mm	70mm	70mm
F. Chainstay Length	455–462mm	455–462mm	455–462mm	455–462mm	455–462mm
G. Headtube Length	90mm	110mm	140mm	170mm	190mm
H. Fork Length	480mm	480mm	480mm	480mm	480mm
J. Fork Offset	51mm	51mm	51mm	51mm	51mm
K. Wheelbase	1050–1067mm	1067–1084mm	1083–1100mm	1110–1127mm	1141–1158mm
M. Stack	594mm	615mm	643mm	671mm	690mm
N. Reach	350mm	364mm	368mm	385mm	409mm
P. Standover	690mm	732mm	778mm	821mm	859mm

Measurements based on:

A Salsa Firestarter Carbon fork which is equivalent to an average 100mm fork at 20% sag

A 29 x 2.25" tire measuring 746mm in diameter

Standover (P) measured vertically to top of toptube from a position 50mm forward of BB center

FARGO TI

Size	XS	S	M	L	XL
Recommended Rider Height	150cm–160cm	160cm–175cm	173cm–183cm	180cm–191cm	188cm–UP
A. Toptube Effective	520mm	540mm	565mm	590mm	600mm
B. Seat Tube Length	355.6mm	406.4mm	457.2mm	508.0mm	558.8mm
C. Headtube Angle	68.5°	69°	69°	69°	69°
D. Seat Tube Angle	74.0°	74°	73°	73°	73°
E. BB Drop	70mm	70mm	70mm	70mm	70mm
F. Chainstay Length	455–462mm	455–462mm	455–462mm	455–462mm	455–462mm
G. Headtube Length	90mm	110mm	140mm	170mm	190mm
H. Fork Length	480mm	480mm	480mm	480mm	480mm
J. Fork Offset	51mm	51mm	51mm	51mm	51mm
K. Wheelbase	1050–1067mm	1067–1084mm	1083–1100mm	1110–1127mm	1141–1158mm
M. Stack	594mm	615mm	643mm	671mm	690mm
N. Reach	350mm	364mm	368mm	385mm	409mm
P. Standover	692mm	734mm	781mm	823mm	861mm

Measurements based on:

A Firestarter Fork which is 483 x 45mm offset, this is equivalent to an average 100mm fork at 20% sag

Measurements listed are based on a 29 x 2.4" tire measuring 746mm in diameter

Standover (P) for all sizes is measured vertically to top of toptube from a position 50mm forward of BB center

JOURNEYMAN 650&700

Size	50cm	52cm	54cm	55.5cm	57cm	59.5cm
Recommended Rider Height	152cm–160cm	157cm–165cm	165cm–175cm	173cm–183cm	180cm–190cm	188cm–UP
A. Toptube Effective	500mm	520mm	540mm	555mm	570mm	595mm
B. Seat Tube Length	380.0mm	450.0mm	470.0mm	510.0mm	530.0mm	560.0mm
C. Headtube Angle	70.0°	70.5°	70.5°	70.5°	70.5°	70.5°
D. Seat Tube Angle	75.5°	74.0°	73.0°	73.0°	73.0°	72.5°
E. BB Drop	72.0mm	72.0mm	72.0mm	72.0mm	72.0mm	72.0mm
F. Chainstay Length	440mm	440mm	440mm	440mm	440mm	440mm
G. Headtube Length	100mm	115mm	140mm	170mm	200mm	215mm
H. Fork Length	405mm	405mm	405mm	405mm	405mm	405mm
J. Fork Offset	50mm	50mm	50mm	50mm	50mm	50mm
K. Wheelbase	1017mm	1018mm	1029mm	1045mm	1061mm	1081mm
M. Stack	528mm	544mm	567mm	595mm	624mm	639mm
N. Reach	364mm	364mm	367mm	373mm	379mm	394mm
P. Standover	666mm	720mm	742mm	778mm	801mm	823mm

Measurements based on:

A fork which is 405 x 50mm offset

Measurements listed are based on a 700 x 38mm tire measuring 706mm in diameter

Standover (P) for all sizes is measured vertically to top of toptube from a position 50mm forward of BB center



VAYA

Size	49.5cm	52cm	54cm	55cm	57cm	59.5cm
Recommended Rider Height	147–158 cm	158–165 cm	165–173 cm	170–178 cm	175–185 cm	188cm–UP5
A. Toptube Effective	495mm	520mm	540mm	550mm	570mm	595mm
B. Seat Tube Length	380.0mm	450.0mm	470.0mm	510.0mm	530.0mm	560.0mm
C. Headtube Angle	70.25°	71.50°	71.50°	71.50°	71.50°	71.50°
D. Seat Tube Angle	75.5°	74.5°	73.5°	73.0°	72.5°	72.0°
E. BB Drop	75mm	75mm	75mm	75mm	75mm	75mm
F. Chainstay Length	450mm	450mm	450mm	450mm	450mm	450mm
G. Headtube Length	100mm	100mm	145mm	165mm	185mm	205mm
H. Fork Length	405mm	405mm	405mm	405mm	405mm	405mm
J. Fork Offset	50mm	50mm	50mm	50mm	50mm	50mm
K. Wheelbase	1019.4mm	1022.7mm	1034.0mm	1038.9mm	1053.5mm	1072.6mm
M. Stack	542.7mm	547.4mm	590.1mm	609.1mm	628.0mm	647.0mm
N. Reach	354.6mm	368.2mm	365.2mm	363.8mm	372.0mm	384.8mm
P. Standover	660.1mm	713.7mm	742.0mm	776.3mm	795.6mm	821.0mm

Measurements based on:

A 700 x 41mm tire measuring 709mm in diameter

Standover (P) for all sizes is measured vertically to top of toptube from a position 50mm forward of BB center

MARRAKESH

Size	50cm	52cm	54cm	55cm	57cm	59.5cm
Recommended Rider Height	147–158cm	158–165cm	165–173cm	170–178cm	175–185cm	185–UP
A. Toptube Effective	500mm	520mm	540mm	550mm	570mm	595mm
B. Seat Tube Length	440.0mm	480.0mm	520.0mm	560.0mm	590.0mm	620.0mm
C. Headtube Angle	69.5°	70.75°	70.75°	70.75°	70.75°	70.75°
D. Seat Tube Angle	75.5°	74.5°	73.5°	73.0°	72.5°	72.0°
E. BB Drop	77mm	77mm	77mm	77mm	77mm	77mm
F. Chainstay Length	455–472mm	455–472mm	455–472mm	455–472mm	455–472mm	455–472mm
G. Headtube Length	90mm	100mm	110mm	125mm	150mm	175mm
H. Fork Length	415mm	415mm	415mm	415mm	415mm	415mm
J. Fork Offset	55mm	55mm	55mm	55mm	55mm	55mm
K. Wheelbase	1040.6–1057.6mm	1039.6–1056.6mm	1049.7–1066.7mm	1054.9–1071.9mm	1070.2–1087.2mm	1090.0–1107.0mm
M. Stack	539.5mm	553.9mm	563.3mm	577.5mm	601.1mm	624.7mm
N. Reach	360.5mm	366.4mm	373.1mm	373.4mm	380.5mm	392.0mm
P. Standover	704.2mm	735.6mm	761.2mm	791.0mm	817.4mm	843.5mm


Measurements based on:


A 700 x 42mm tire measuring 710mm in diameter

Standover (P) for all sizes is measured vertically to top of toptube from a position 50mm forward of BB center





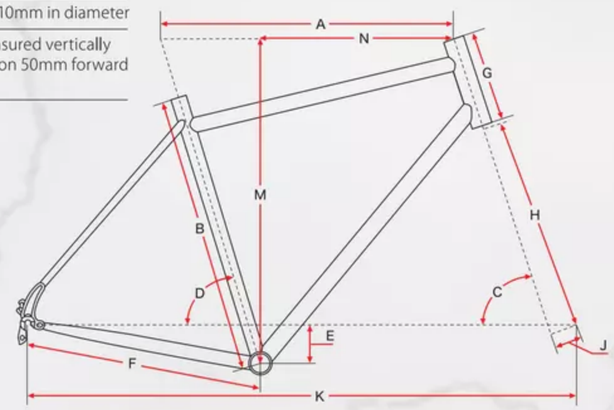

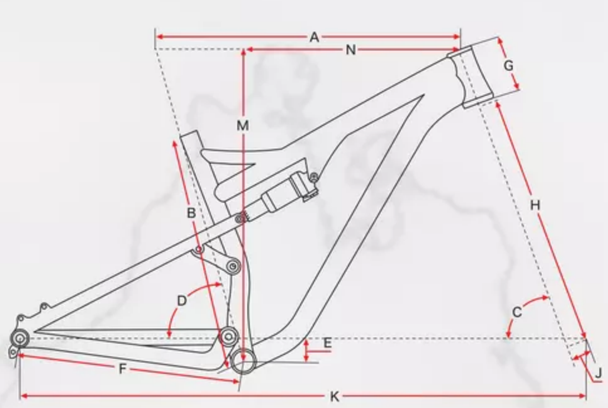



●販売店は、弊社ホームページから以下の手順で検索できます。
【http://ride2rock.jp】➡【BRANDS】➡【SALSA CYCLES】➡【SHOP LIST】
●掲載写真のカラーは、印刷の色調により実物と異なる場合があります。
●掲載商品の仕様、価格、納期はメーカーの都合、および、為替変動などにより、予告なく変更することがございます。
●商品のセッティング、取り扱い方法に関しては、必ずお買い求めの販売店で指導を受けてください。
●本カタログの無断転用、複写を禁じます。
●カタログ内に表記されている価格は、すべて税抜価格です。

ride2rock.jp
MOTOCROSS INTERNATIONAL
株式会社 モトクロスインターナショナル
〒465-0024 愛知県名古屋市名東区本郷1-80
TEL:052-773-0256 FAX:052-775-4119
E-MAIL:pal@motocrossinternational.com