
MOUNTING INSTRUCTIONS


© MANTIS BICYCLE CO. 1989

(1) REPLACE CLAMP BOLT WITH LONG UNIT AND TIGHTEN SECURELY


(2) REMOVE AND REPLACE CABLE CLAMP WITH BOLT AND WASHER FROM THE BOTTOM BRACKET SHELL.

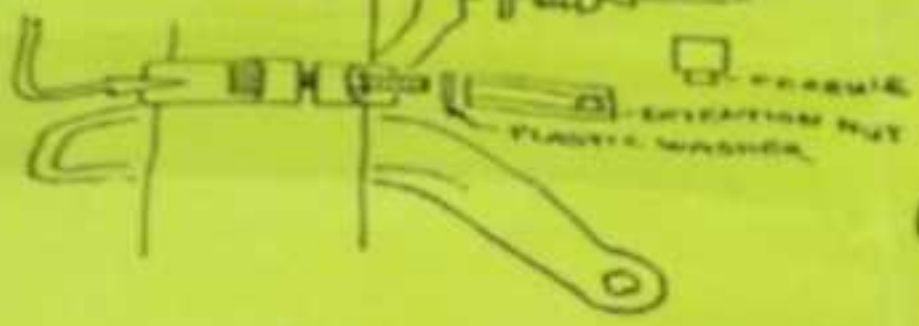


(3)
- HOLD DER. CLAMP BOLT WITH WRENCH.
- TIGHTEN EXTENTION NUT WITH HOLE IN UPRIGHT POSITION.
- INSTALL FERRULE

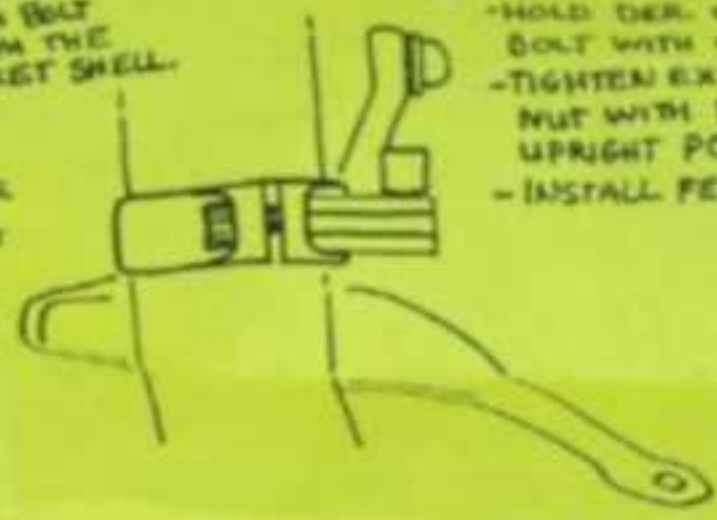

(4)
- INSTALL JAM NUT, PULLEY AND BOLT IN THIS ORDER.
- REMEMBER TO GREASE BOLT WELL.

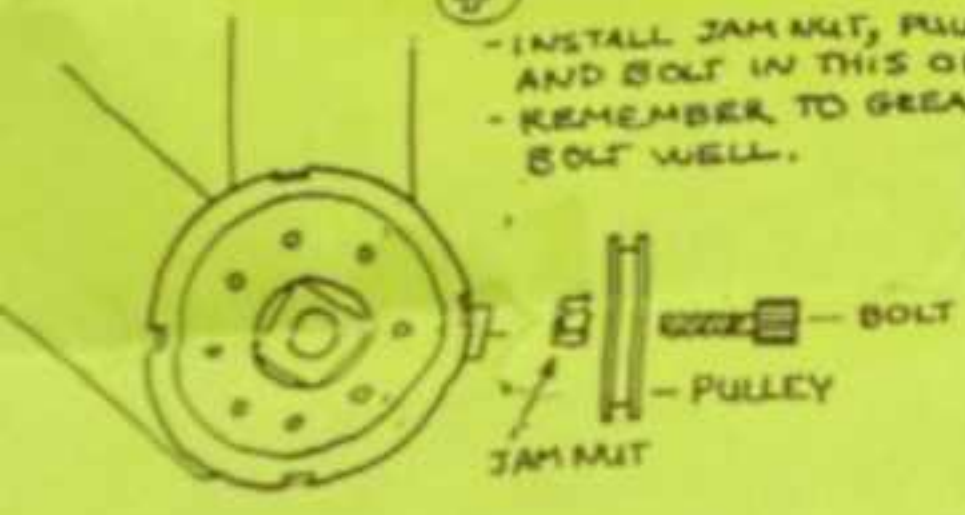


(5)
- LEAVE ENOUGH PLAY IN ROLLER TO MOVE SLIGHTLY SIDE TO SIDE. TIGHTEN JAM NUT AGAINST BB. SHELL FITTING.

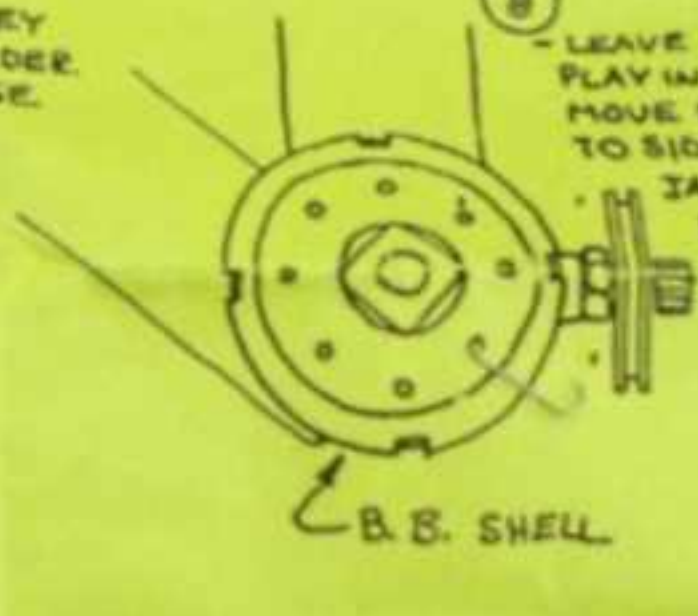

CABLE ROUTING
REAR VIEW



CABLE ROUTING
SIDE VIEW

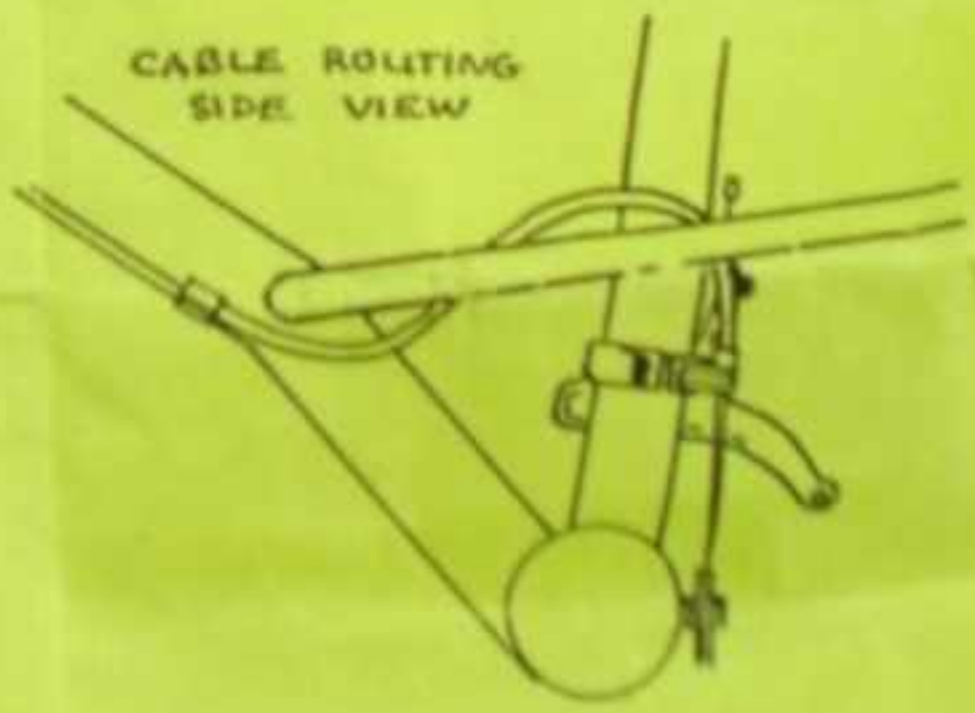

FOR QUESTIONS REGARDING THIS PRODUCT OR OTHER MANTIS PERFORMANCE ACCESSORIES, CALL 714 993-1621 OR CONTACT YOUR DEALER.

FOR MANTIS MARKETING MATERIALS AND OTHER PRODUCTS!