
TRIMBLE

TRIMBLE 4-1 Composite Frame

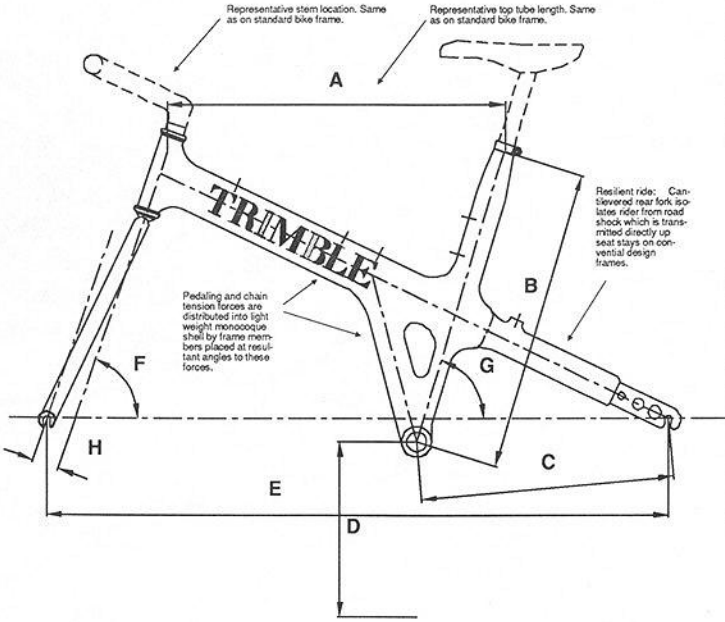

TECHNICAL SPECIFICATIONS

Frame Material: duPont Kevlar™, carbon fiber, and fiberglass in epoxy resin matrix.

Frame Fittings: 2024-T3 and 6061-T6 Aluminum with steel seat-post clamp. Dual water bottle cage "braze-on"s.

Component Information:
Bottom bracket threading: English.
Seat post size: 26.8mm.
Wheel size: 26".
Brakes:
Rear - Shimano Deore XT U-Brake.
Front - standard cantilever braze-on bosses.
Front derailleur mount: Standard band clamp.
Shift cables: internally routed.

FRAME GEOMETRY CHART

	A	B	C	D	E	F	G	H
Frame Size	Top Tube	Seat Tube	Chain Stay	Bottom Bracket Height	Wheel Base	Head Tube Angle	Seat Tube Angle	Fork Offset
18"	22 1/8"	18"	17"	11 1/2"	41 1/8"	70°	72°	1 3/4"
20"	22 1/2"	20"	17"	11 1/2"	41 1/2"	70°	72°	1 3/4"
22"	22 7/8"	22"	17"	11 1/2"	41 7/8"	70°	72°	1 3/4"
Competition Model								
18"	22 1/8"	18"	17"	11 1/2"	41"	71°	73°	1 3/4"
20"	22 1/2"	20"	17"	11 1/2"	41 1/2"	71°	73°	1 3/4"
22"	22 7/8"	22"	17"	11 1/2"	42"	71°	73°	1 3/4"

Notes: 1. Top tube and chain-stay lengths are measured from center to center.
2. To allow for design improvements these specifications are subject to change without notice.

FRAME GEOMETRY

TRIMBLE
Trimble Products Co.
P.O. Box 246
Berryville, Arkansas, USA 72616
(501) 423-2470
© Copyright 1988 Trimble Products Co.