
CINCH
POWER METER


SPINDLE INSTALLATION MANUAL


CHECK RACEFACE.COM OR EASTONCYCLING.COM
FOR INSTALLATION UPDATES

IN THE BOX



CONFIGURATION A
CINCH CRANK EXTRACTOR

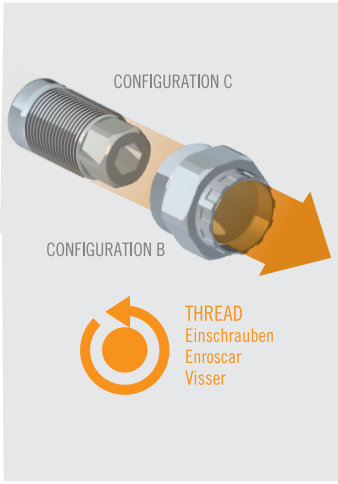


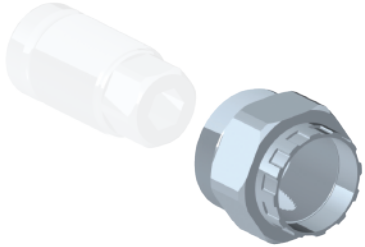

CONFIGURATION B
CINCH POWER NDS
CRANK BOLT ADAPTER




CONFIGURATION C
8-16mm HEX ADAPTER




ANTENNA CAP TOOL





MICRO USB CABLE

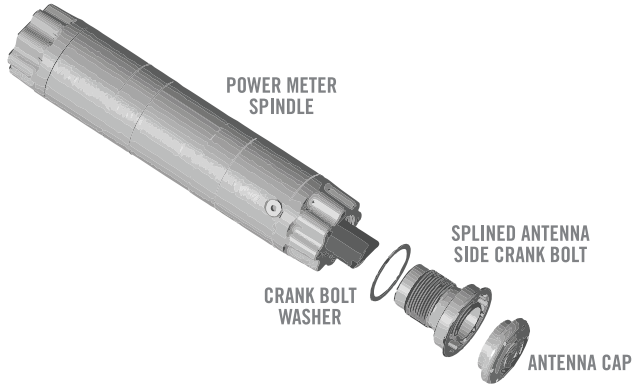



POWER METER INSTALL

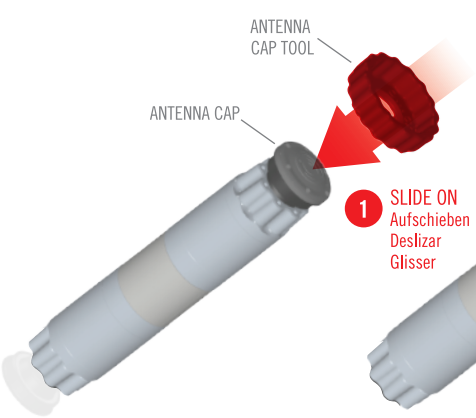


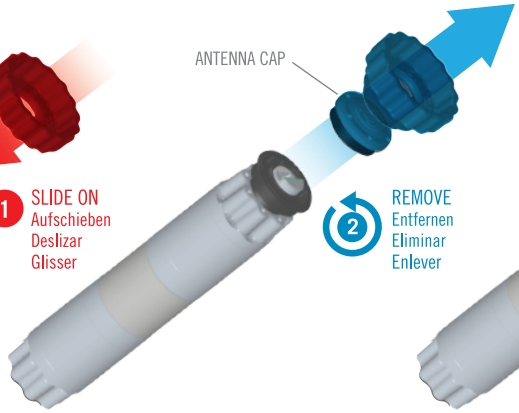


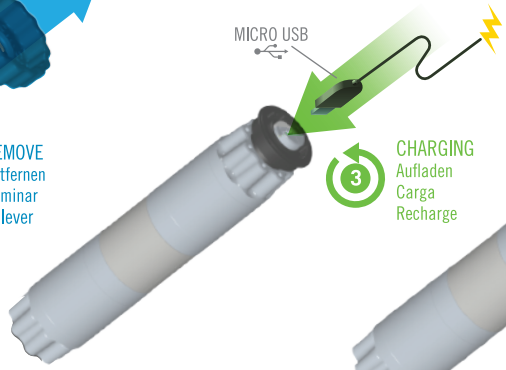

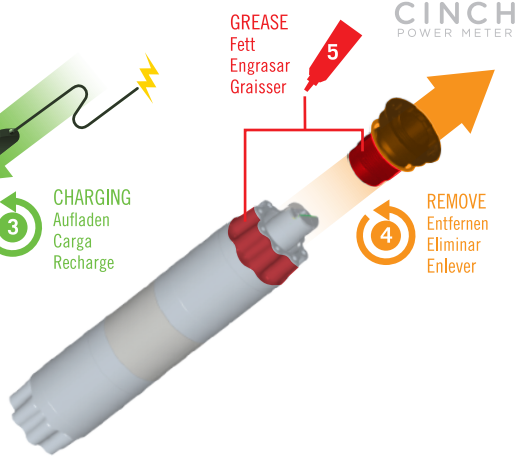

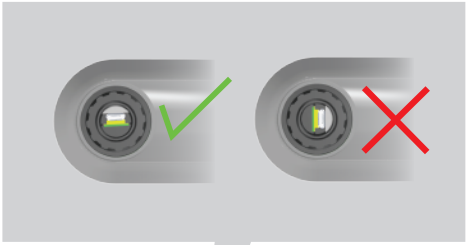

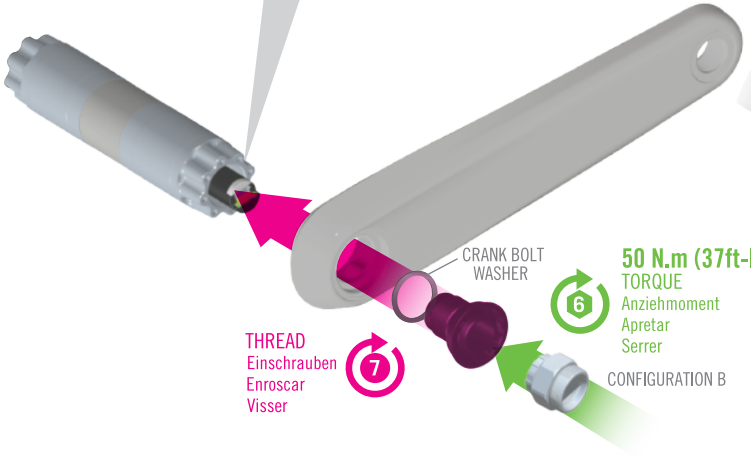

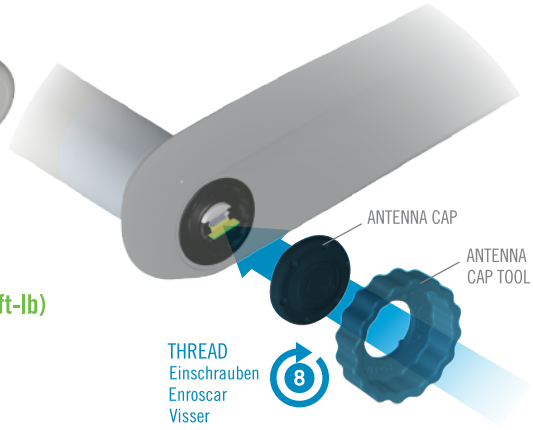

CINCH

9


DOWNLOAD LATEST CINCH APP FOR YOUR SMART PHONE FROM GOOGLE PLAY OR APP STORE AND USE IT TO KEEP YOUR CINCH POWER METER FIRMWARE UP TO DATE.

GET IT ON Google Play

Download on the App Store

CRANK INSTALLATION

CINCH
POWER METER

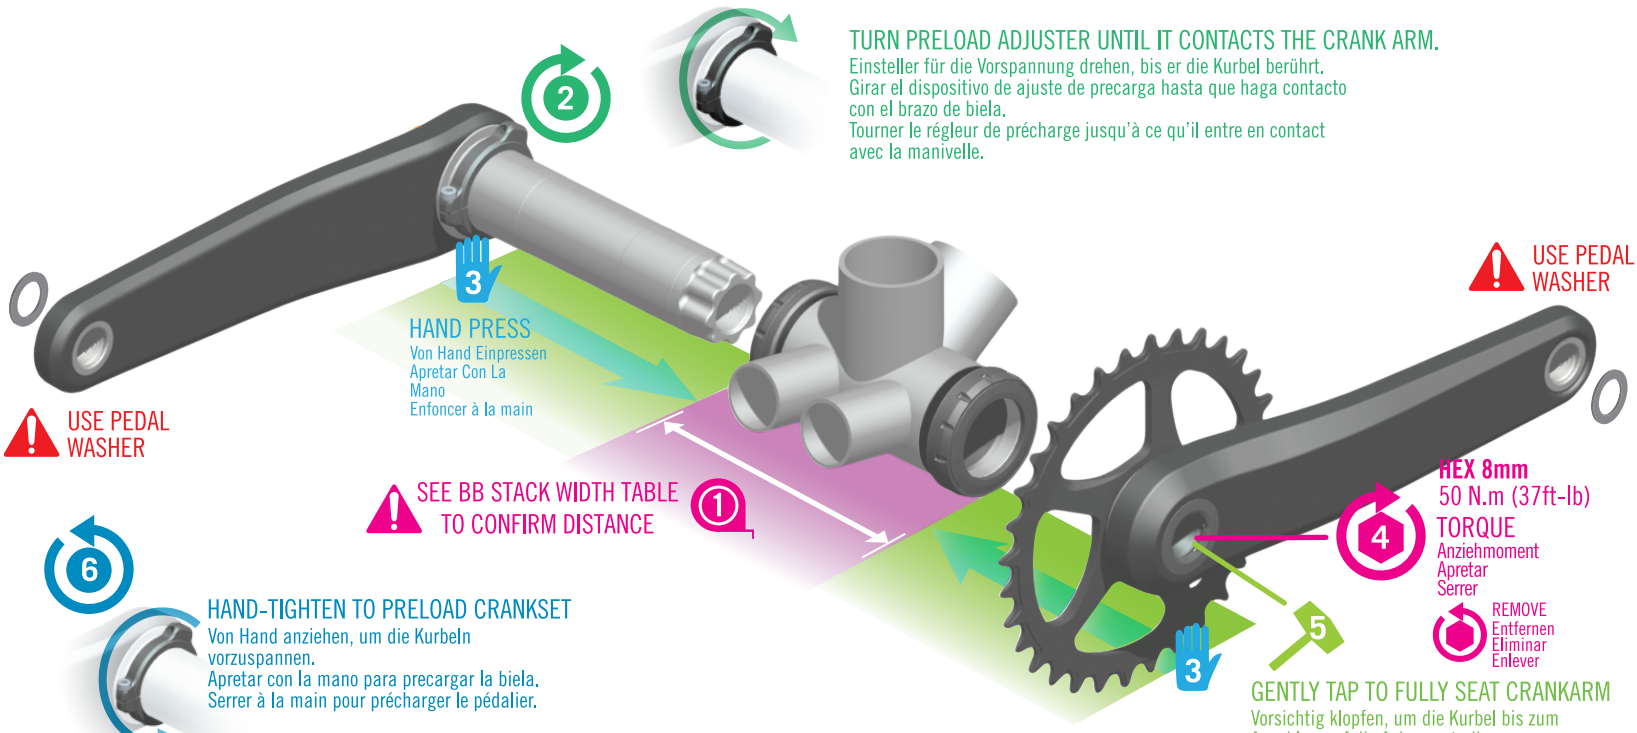

2

TURN PRELOAD ADJUSTER UNTIL IT CONTACTS THE CRANK ARM.
Einsteller für die Vorspannung drehen, bis er die Kurbel berührt.
Girar el dispositivo de ajuste de precarga hasta que haga contacto con el brazo de biela.
Tourner le régleur de précharge jusqu'à ce qu'il entre en contact avec la manivelle.

3

HAND PRESS
Von Hand Einpressen
Apretar Con La Mano
Enfoncer à la main

USE PEDAL WASHER

USE PEDAL WASHER

SEE BB STACK WIDTH TABLE TO CONFIRM DISTANCE

1

4

HEX 8mm
50 N.m (37ft-lb)
TORQUE
Anziehmoment
Apretar
Serrer

5

REMOVE
Entfernen
Eliminar
Enlever

GENTLY TAP TO FULLY SEAT CRANKARM
Vorsichtig klopfen, um die Kurbel bis zum Anschlag auf die Achse zu treiben.
Golpear ligeramente hasta acoplar bien el brazo de biela.
Tapoter gentiment pour asseoir correctement la manivelle.

6

HAND-TIGHTEN TO PRELOAD CRANKSET
Von Hand anziehen, um die Kurbeln vorzuspannen.
Apretar con la mano para precargar la biela.
Serrer à la main pour précharger le pédalier.

7


HEX 2mm
TIGHTEN PRELOAD ADJUSTER BOLT TO CLOSE GAP
Einsteller für die Vorspannung anziehen, um die Lücke zu schließen.
Apretar el perno del dispositivo de ajuste de precarga hasta cerrar el hueco.
Serrer le boulon de réglage de la précharge pour refermer l'espace.


8


ENSURE THERE IS NO PLAY
Prüfen, dass kein Spiel auftritt.
Comprobar el juego.
Vérifier le jeu


POWER METER REMOVAL


CINCH
POWER METER

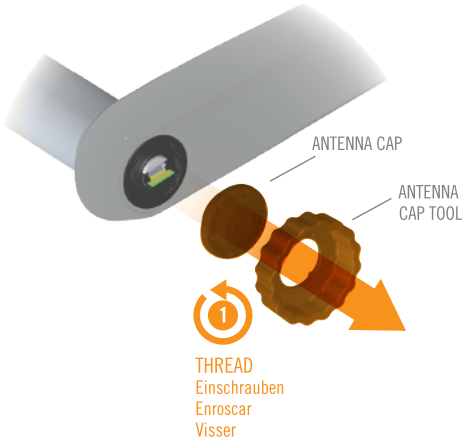

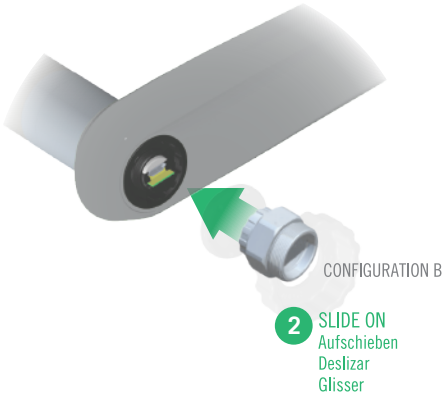


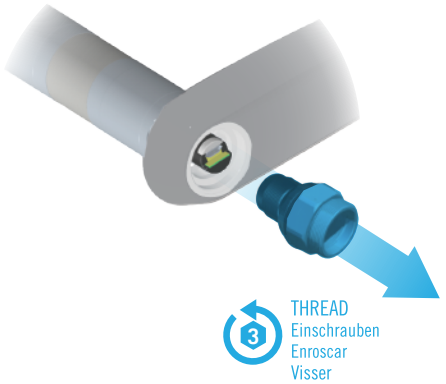

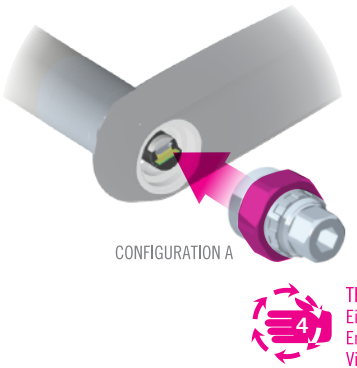

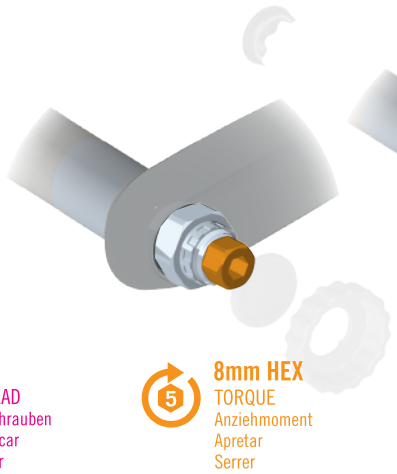



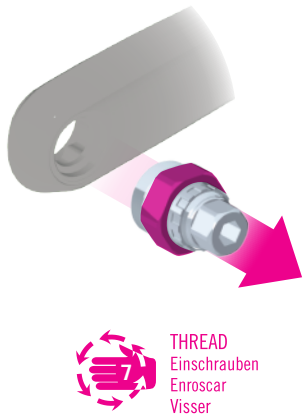

CINCH
POWER METER

BB STACK WIDTH TABLE

Name	Total BB Width*
OPM1730129	92.1 ± 1.0 mm
OPM1730134	98.1 ± 1.0 mm



INCLUDING REQUIRED SPACERS.
SEE BB INSTRUCTION SHEET.

Einschließlich der notwendigen Distanzscheiben. Incluyendo separadores requeridos.

Ver instrucciones de pedalier. Incluant les entretoises nécessaires.

Consulter la fiche d'instructions de l'axe de pédalier

CHECK RACEFACE.COM OR EASTONCYCLING.COM
FOR INSTALLATION UPDATES

B30100-A