WHISTLE Atala



E-BIKE


2023

2023: index



E-FULL SUSPENDED	B-RUSH C10.2
	B-RUSH C8.3
	B-RUSH C7.3
	B-RUSH C6.3
	B-RUSH C5.3
	B-RUSH C4.3
	O-RUSH C6.2
	B-RUSH A7.3
	B-RUSH A5.3
E-HARDTAIL	O-RACE C7.3
	B-RACE A9.3
	B-RACE A8.3
	B-RACE A7.3
	B-RACE A6.3
	B-CROSS A8.2
	B-CROSS A7.3
	B-CROSS A6.3
	B-CROSS A4.2
	Y-CROSS A4.3
	B-RACE A5.2
	B-CROSS A5.2
	B-CROSS A3.2
	B-CROSS A2.2
E-GRAVEL	FLOW ADV E2.0
	FLOW ADV RIDE

2023: index

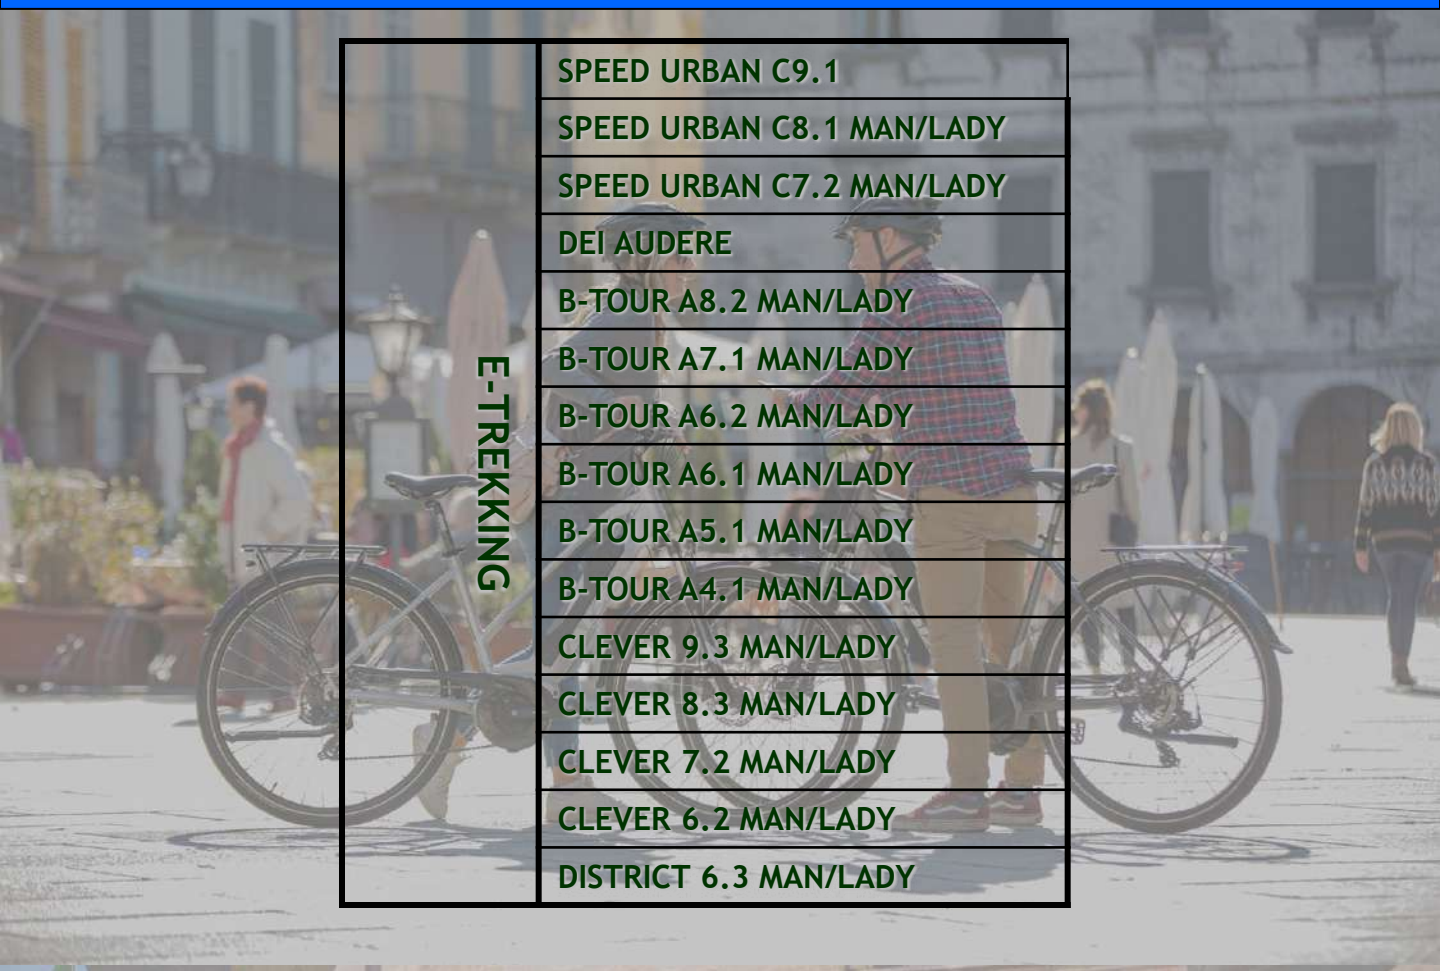

E-TREKKING	SPEED URBAN C9.1
	SPEED URBAN C8.1 MAN/LADY
	SPEED URBAN C7.2 MAN/LADY
	DEI AUDERE
	B-TOUR A8.2 MAN/LADY
	B-TOUR A7.1 MAN/LADY
	B-TOUR A6.2 MAN/LADY
	B-TOUR A6.1 MAN/LADY
	B-TOUR A5.1 MAN/LADY
	B-TOUR A4.1 MAN/LADY
	CLEVER 9.3 MAN/LADY
	CLEVER 8.3 MAN/LADY
	CLEVER 7.2 MAN/LADY
	CLEVER 6.2 MAN/LADY
	DISTRICT 6.3 MAN/LADY



E-URBAN	B-EASY A7.1	B-EASY A6.1
	B-EASY A5.2	CULT 9.3
	CULT 8.3	CULT 7.2 28”
	CULT 7.2 26”	CULT 6.2
	DESIRE 6.3	DEAL 5.3
	CALIFFO	CLUB
	E-SPIKE 8.2 MAN/LADY	E-SPIKE 8.1 LTD
	E-SPIKE 7.1 MAN/LADY	E-SPACE 8.2
	E-RUN HD 8.1 LADY	E-RUN FS7.1 MAN
	E-RUN FS6.1 MAN/LADY	E-RUN 7.1 28” MAN/LADY
	E-RUN 7.1 26” MAN/LADY	E-RUN 6.1 LADY
	E-FOLDING	EXTRAFOLDING 7.2
	EXTRAFOLDING 7.1 LTD	EXTRAFOLDING
	E-WAY	E-WAY 24+

E-Full Suspended

Pedalare fino alla cima e attaccare velocemente le discese più tecniche alla massima velocità. Sono costruite per le competizioni, ma grazie alla robuste sospensioni, sono agili e divertenti anche sui sentieri vicino a casa.

Ride to the top and quickly attack the most technical descents at maximum speed. Are built for competitions but thanks to the sturdy suspensions, they are agile and fun even on trails near home.

B-Rush 2022 #MISSIONCARBON

I nostri nuovi telai B-Rush2022 nascono da un progetto esclusivo per il marchio Whistle:
*** Nuovo Design**. La progettazione delle forme e l'ingegnerizzazione degli stampi è realizzata appositamente dal nostro staff tecnico.
*** Materiali all'avanguardia.** Resistenza, leggerezza e comfort sono garantiti dalla fibra di Carbonio T700, ottenuta attraverso processi ad altissima temperatura e scelta per le sue elevate prestazioni meccaniche associate ad un peso ridotto.
*** Produzione Smart.** Prodotto attraverso le più moderne tecnologie nel campo dei materiali compositi, che permettono di ottimizzare i tempi di realizzazione di ogni telaio.
*** Il risultato?** Un prodotto dalle prestazioni uniche, in grado di soddisfare gli utilizzatori più esigenti, al miglior prezzo di mercato.

Our new B-Rush2022 frames are born from an exclusive project for the Whistle brand:
*** New Design.** The design of the shapes and the engineering of the molds is carried out by our technical staff.
*** State-of-the-art materials.** Resistance, lightness and comfort are guaranteed by the T700 carbon fiber, obtained through very high temperature processes and chosen for its high mechanical performance associated with low weight.
*** Smart manufacturing.** Produced through the most modern technologies in the field of composite materials, which allows to realize the realization times of each frame.
*** The result?** A product with unique performances, able to satisfy the most demanding users, at the best market price.

B-Rush C10.2



- Bosch Perf. CX Smart System
- Powertube 750Wh
- Kiox300 + Led Remote
- 29”
- 12s
- 26.5 kg

	Black/ Kashima
40	0116850550
44	0116850560
48	0116850570
52	0116850580

Frame	Full Carbon 29”, Toray T700, integrated battery, internal routing, Rear travel 150 mm, 12x148 mm E-Thru
Fork	Fox 38 Float Factory eMTB+, 160 mm, Air, 1.5 tapered, FIT4, 15x110 mm
Rear Shock	Fox Float X2 Factory,EVOL, LSR, HSR, 2 Pos-Lever, 230x65
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	Miche Black Box, FSA 36T MegaTooth
Rear Derailleur	Shimano XT RD-M8100 SGS, Shadow Plus
Shifters Levers	Shimano XT SL-M8100 Rapidfire-Plus, 12s
Brakes	Shimano XT BR-M8120, Four piston, Rotor RT-MT800 203 mm / 203 mm
Cassette	Shimano CS-M8100 12s 10/51
Pedals	Alu MTB Full+
Wheels	Shimano XT WH-M8120
Stem	Satori Ursa, 31,8 mm, Internal routing
Handlebar	Race Face Chester, 780 mm, Rise 20
Seatpost	Fox Transfer Factory Kashima, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Vittoria Mazza 29”x2,60”

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 750 Horizontal, frametype, weight 4,2 kg
Charger Type	4 A
Change Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	KIOX 300 + Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

B-Rush C8.3



- Bosch Perf. CX Smart System
- Powertube 750Wh
- Kiox300 + Led Remote
- 29”
- 12s
- 27 kg

2023

	Black/ Red
40	0116862200
44	0116862210
48	0116862220
52	0116862230

Frame	Full Carbon 29”, Toray T700, integrated battery, internal routing, Rear travel 150 mm, 12x148 mm E-Thru
Fork	Fox 36 Float Performance eMTB+, 160 mm, Air, 1.5 Tapered, GRIP, 15x110 mm
Rear Shock	Fox Float X Performance,EVOL, LSR, 2 Pos-Lever, 230x65
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	Miche Black Box, FSA 36T MegaTooth
Rear Derailleur	Shimano XT RD-M8100 SGS, Shadow Plus
Shifters Levers	Shimano SLX SL-M7100 Rapidfire-Plus, 12s
Brakes	Shimano BR-MT520, Four piston, Rotor RT30 203 mm / 203 mm
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB Full+
Wheels	Mavic E-Crossride 29”
Stem	Satori Ursa, 35 mm, Internal routing
Handlebar	Alu, 780 mm, 35mm, Rise 15mm
Seatpost	Dropper Alpha 1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	F: Schwalbe Magic Mary Evo, Addix Soft, Super Trail, 29”x2,60” R: Schwalbe Hans Dampf Evo, Addix Soft, Super Trail, 29”x2,60”

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 750 Horizontal, frametype, weight 4,2 kg
Charger Type	4 A
Change Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	KIOX 300 + Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

B-Rush C7.3



- Bosch Perf. CX Smart System
- Powertube 750Wh
- Kiox300 + Led Remote
- 29”
- 12s
- 27 kg

2023

	Black/ Green
40	0116862300
44	0116862310
48	0116862320
52	0116862330

Frame	Full Carbon 29”, Toray T700, integrated battery, internal routing, Rear travel 150 mm, 12x148 mm E-Thru
Fork	Rock Shox Domain RC e-MTB, 150 mm, Maxle Lite 15x110 mm, DebonAir, 1.5 Tapered
Rear Shock	Rock Shox RS Deluxe Select R, 230x65
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	Miche Black Box, FSA 34T MegaTooth
Rear Derailleur	Shimano XT RD-M8100 SGS, Shadow Plus
Shifters Levers	Shimano SLX SL-M7100 Rapidfire-Plus, 12s
Brakes	Shimano BR-MT420, Four piston, Rotor RT30 203 mm / 203 mm
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB Full+
Front Hub	Shimano Alivio MT400, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT410B, 12x148, CL, MicroSpline, 32h
Rims	RADIALE X30, eDesign | Asymmetric, Tubeless Ready, 622x30c
Stem	Satori Ursa, 35 mm, Internal routing
Handlebar	Alu, 780 mm, 35mm, Rise 15mm
Seatpost	Dropper Alpha 1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Nobby Nic, Performance, Addix, 29”x2,60”

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 750 Horizontal, frametype, weight 4,2 kg
Charger Type	4 A
Change Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	KIOX 300 + Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

B-Rush C6.3



- Bosch Perf. CX Smart System
- Powertube 750Wh
- Kiox300 + Led Remote
- 29”
- 12s
- 27 kg

2023

	Black/ Silver
40	0116862400
44	0116862410
48	0116862420
52	0116862430

Frame	Full Carbon 29”, Toray T700, integrated battery, internal routing, Rear travel 150 mm, 12x148 mm E-Thru
Fork	Rock Shox 35 Gold RL, 150 mm, Maxle Lite 15x110 mm, DebonAir, Motion Control, 1.5 Tapered, Lockout, E-Bike
Rear Shock	Rock Shox RS Deluxe Select R, 230x65
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	FSA 34T MegaTooth
Rear Derailleur	Sram SX Eagle
Shifters Levers	Sram SX Eagle Single Click Trigger, 12s
Brakes	Shimano BR-MT420, Four piston, Rotor SM-RT30 203 mm / 203 mm
Cassette	Sram PG1210 Eagle 12s, 11/50
Pedals	Alu MTB Full+
Front Hub	Shimano Alivio MT400, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT410B, 12x148, CL, 32h
Rims	RADIALE X30, eDesign | Asymmetric, Tubeless Ready, 622x30c
Stem	Satori Ursa, 35 mm, Internal routing
Handlebar	Alu, 780 mm, 35mm, Rise 15mm
Seatpost	Dropper Alpha 1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Nobby Nic, Performance, Addix, 29”x2,60”

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 750 Horizontal, frametype, weight 4,2 kg
Charger Type	4 A
Change Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	KIOX 300 + Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

B-Rush C5.3



- Bosch Perf. CX Smart System
- Powertube 750Wh
- Led Remote
- 29”
- 12s
- 27 kg

2023

	Black/ Red
40	0116862500
44	0116862510
48	0116862520
52	0116862530

Frame	Full Carbon 29”, Toray T700, integrated battery, internal routing, Rear travel 150 mm, 12x148 mm E-Thru
Fork	Rock Shox 35 Silver R, 150 mm, Maxle Lite 15x110 mm, Coil, 1.5 Tapered, Lockout, E-Bike
Rear Shock	Rock Shox RS Deluxe Select R, 230x65
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	FSA 34T
Rear Derailleur	Shimano Deore RD-M6100 SGS, Shadow Plus
Shifters Levers	Shimano Deore SL-M6100 Rapidfire-Plus, 12s, I-spec
Brakes	Shimano BR-MT420, Four piston, Rotor SM-RT30 203 mm / 203 mm
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB Full+
Front Hub	Shimano Alivio MT400, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT410B, 12x148, CL, Microspline, 32h
Rims	RADIALE X30, eDesign | Asymmetric, Tubeless Ready, 622x30c
Stem	Satori Ursa, 35 mm, Internal routing
Handlebar	Alu, 780 mm, 35mm, Rise 15mm
Seatpost	Dropper Alpha 1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Nobby Nic, Performance, Addix, 29”x2,60”

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 750 Horizontal, frametype, weight 4,2 kg
Charger Type	4 A
Change Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

B-Rush C4.3



- Bosch Perf. CX Smart System
- Powertube 625Wh
- Led Remote
- 29”
- 12s
- 27 kg

2023

	Black/ Silver
40	0116862600
44	0116862610
48	0116862620
52	0116862630

Frame	Full Carbon 29”, Toray T700, integrated battery, internal routing, Rear travel 150 mm, 12x148 mm E-Thru
Fork	Rock Shox 35 Gold RL, 150 mm, Maxle Lite 15x110 mm, DebonAir, Motion Control, 1.5 Tapered, Lockout, E-Bike
Rear Shock	Rock Shox RS Deluxe Select R, 230x65
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	FSA 34T
Rear Derailleur	Shimano Deore RD-M6100 SGS, Shadow Plus
Shifters Levers	Shimano Deore SL-M6100 Rapidfire-Plus, 12s, I-spec
Brakes	Shimano BR-MT420, Four piston, Rotor SM-RT30 203 mm / 203 mm
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB Full+
Front Hub	Shimano Alivio MT400, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT410B, 12x148, CL, Microspline, 32h
Rims	RADIALE X30, eDesign | Asymmetric, Tubeless Ready, 622x30c
Stem	Satori Ursa, 35 mm, Internal routing
Handlebar	Alu, 780 mm, 35mm, Rise 15mm
Seatpost	Dropper Alpha 1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Tough Tom 29”,2,6

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 625 Horizontal, frametype, weight 3,5 kg
Charger Type	4 A
Change Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

O-Rush C6.2



- OliEDS Edge
- Powertube 630Wh
- AM LCD
- 29”
- 12s
- 27 kg

Black Anthracite/White	
40	0116862600
44	0116862610
48	0116862620
52	0116862630

Frame	Full Carbon 29”, Toray T700, integrated battery, internal routing, Rear travel 150 mm, 12x148 mm E-Thru
Fork	Rock Shox Recon Silver RL, 150 mm, Maxle Lite 15x110 mm, Solo Air, 1.5 Tapered, Lockout, E-Bike
Rear Shock	Rock Shox RS Deluxe Select R, 230x65
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	FSA 34T
Rear Derailleur	Shimano XT RD-M8100 SGS, Shadow Plus
Shifters Levers	Shimano Deore SL-M6100 Rapidfire-Plus, 12s, I-spec
Brakes	Shimano BR-MT420, Four piston, Rotor SM-RT30 203 mm / 203 mm
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB Full+
Front Hub	Shimano Alivio MT400, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT410B, 12x148, CL, Microspline, 32h
Rims	RADIALE X30, eDesign | Asymmetric, Tubeless Ready, 622x30c
Stem	Alu Oversize, 35 mm, Bar bore 31,8 mm
Handlebar	Rise Alu Oversize, 780 mm
Seatpost	Dropper Alpha 1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Tough Tom 29”x2,25”

Motor	OliEDS Edge 36 V, 250 W
Max Torque	90 Nm
Sensor Type	Torque
Battery	Phylion 630Wh
Charger Type	2 A
Change Time	Up to 9 hours
Max Assisted Speed	25 km/h
Display	AM LCD
Power	Mode 1: 50% Mode 2: 100% Mode 3: 200% Mode 4: 300% Mode 5: 400%

Estetica funzionalità e prestazioni.
Massimo controllo in discesa grazie alla geometria raccolta, pedalabilità in salita assicurata dall'assistenza elettrica.

Aesthetic, features and performance.
Maximum control in steep downhill thans to short geometry, rideability in uphill allowed by the electric power.



Interfaccia Gravity Casting
Telaio con interfaccia prodotta con il metodo della fusione per colata a gravità. Questa tecnologia permette di ottenere un componente estremamente compatto e resistente, migliorando la ridigità torsionale sotto gli sforzi di motore e ciclista.

Gravity Casting Interface
Frame with an interface produced by the gravity casting method.
This technology results in an extremely compact and strong component, improving torsional redigigity under engine and rider stresses



B-Rush A7.3



- Bosch Perf. CX Smart System
- Powertube 750Wh
- KIOX 300 + Led Remote
- 29”
- 12s
- 27 kg

2023

	Petroleum
40	0116863100
44	0116863110
48	0116863120
52	0116863130

Frame	Alu, 29”, Gravity casting, Integrated battery, Tapered, Rear travel 150 mm, 12x148 mm
Fork	Rock Shox 35 Gold RL, 150 mm, Maxle Lite 15x110 mm, DebonAir, Motion Control, 1.5 Tapered, Lockout, E-Bike
Rear Shock	Rock Shox RS Deluxe Select R, 230x65
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	FSA 34T, Megatooth
Rear Derailleur	Sram SX Eagle
Shifters Levers	Sram SX Eagle Single Click Trigger, 12s
Brakes	Shimano BR-MT420, Four piston, Rotor SM-RT30 203 mm / 203 mm
Cassette	Sram PG1210 Eagle 12s, 11/50
Pedals	Alu MTB Full
Front Hub	Shimano Alivio MT400, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT400, 12x148, CL, HG, 32h
Rims	RADIALE X30, eDesign | Asymmetric, Tubeless Ready, 622x30c
Stem	Satori Ursa, 35 mm, Internal routing
Handlebar	Alu, 780 mm, 35mm, Rise 15mm
Seatpost	Dropper B1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Nobby Nic, Performance, Addix, 29”x2,60”

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 750 Horizontal, frametype, weight 4,2 kg
Charger Type	4 A
Change Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	KIOX 300 + Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

B-Rush A5.3



- Bosch Perf. CX Smart System
- Powertube 625Wh
- Led Remote
- 29”
- 12s
- 27 kg

2023

	Petroleum
40	0116863250
44	0116863260
48	0116863270
52	0116863280

Frame	Alu, 29”, Gravity casting, Integrated battery, Tapered, Rear travel 150 mm, 12x148 mm
Fork	RST Vibe TNL, 140 mm, 15x110, 1.5 Tapered, Lockout
Rear Shock	Rock Shox RS Deluxe Select R, 230x65
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	FSA 34T
Rear Derailleur	Shimano Deore RD-M6100 SGS, Shadow Plus
Shifters Levers	Shimano Deore SL-M6100 Rapidfire-Plus, 12s, I-spec
Brakes	Shimano BR-MT420, Four piston, Rotor SM-RT30 203 mm / 203 mm
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB Full
Front Hub	Shimano Alivio MT400, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT400, 12x148, CL, HG, 32h
Rims	RADIALE X30, eDesign | Asymmetric, Tubeless Ready, 622x30c
Stem	Satori Ursa, 35 mm, Internal routing
Handlebar	Alu, 780 mm, 35mm, Rise 15mm
Seatpost	Dropper B1, 31,6 mm, remote
Saddle	Whistle Performance
Tyres	Schwalbe Smart Sam, Performance, Addix, 29”x2,35”

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 625 Horizontal, frametype, weight 3,5 kg
Charger Type	4 A
Change Time	Up to 5 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

E-HardTail

Percorsi sterrati, salite da affrontare con agilità, discese impegnative.
Le nostre eMTB Hardtail sono perfette per affrontare ogni tipo di trail.

Dirt panths, agility climb, demanding descents.
Our Hardtail eMtb are perfect for all types of trails.

BOSCH

AM80

YAMAHA



O-Race C7.3



OliEDS Edge
Phylion 630Wh
AM LCD FullColour
29”
10s
kg

2023

	Carbon/ Blue
40	0116851253
46	0116851263
50	0116851273
	Carbon / Red
40	0116851250
46	0116851260
50	0116851270

Frame	HardTail Carbon 29”, Toray T700, integrated battery, 12x148 mm E-Thru
Fork	RST Vibe TNL, 120 mm, 15x110, 1.5 Tapered, Lockout
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	Miche 34T
Rear Derailleur	Shimano Deore RD-M4100 SGS, Shadow Plus
Shifters Levers	Shimano Deore SL-M4100 Rapidfire-Plus, 10s
Brakes	Shimano BR-MT200, Rotor SM-RT30 180 mm/180 mm
Cassette	Shimano CS-M1100 10s 11/46
Pedals	Alu MTB
Front Hub	Shimano Alivio MT400, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT400, 12x148, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 31,6 mm
Saddle	Selle Royal Sauris
Tyres	Schwalbe Smart Sam, Performance, Addix, 29”x2,35”

Motor	OliEDS Edge 36 V, 250 W
Max Torque	90 Nm
Sensor Type	Torque
Battery	Phylion 630 Wh
Charger Type	2 A
Change Time	Up to 9 hours
Max Assisted Speed	25 km/h
Display	AM LCD Full Colour
Power	Mode 1: 50% Mode 2: 100% Mode 3: 200% Mode 4: 300% Mode 5: 400%

B-Race A9.3



- Bosch Perf. CX Smart System
- Powertube 750Wh
- Led Remote
- 29”
- 12s
- 27 kg

2023

	Black/Gold
40	0116867500
46	0116867510
52	0116867520

Frame	Alu, 29”, Gravity Casting, Integrated battery, Internal routing, Forged interface, 12x148 mm E-Thru
Fork	Suntour XCR32-Boost, 120 m, Coil, 15x110, Tapered, Lockout
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	FSA 34T, Megatooth
Rear Derailleur	Shimano Deore RD-M6100 SGS, Shadow Plus
Shifters Levers	Shimano Deore SL-M6100 Rapidfire-Plus, 12s, I-spec
Brakes	Shimano BR-MT200, Rotor SM-RT30 180 mm / 180 mm
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu MTB
Front Hub	Shimano Alivio MT400, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT410B, 12x148, CL, Microspline, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x30c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Dropper Alpha1, 31,6 mm, remote
Saddle	Selle Royal Sauris
Tyres	Schwalbe Smart Sam, Performance, Addix, 29”x2,35”

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 750 Horizontal, frametype, weight 4,2 kg
Charger Type	4 A
Change Time	Up to 6 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

B-Race A8.3



- Bosch Perf. CX Smart System
- Powertube 625Wh
- Led Remote
- 29”
- 12s
- 27 kg

2023

	Green/Red
40	0116867600
46	0116867610
52	0116867620

Frame	Alu, 29”, Gravity Casting, Integrated battery, Internal routing, Forged interface, 12x148 mm E-Thru
Fork	Suntour XCR32-Boost, 120 m, Coil, 15x110, Tapered, Lockout
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	FSA 34T, Megatooth
Rear Derailleur	Sram SX Eagle
Shifters Levers	Sram SX Eagle Single Click Trigger, 12s
Brakes	Shimano BR-MT200, Rotor SM-RT30 180 mm / 180 mm
Cassette	Sram PG1210 Eagle 12s, 11/50
Pedals	Alu MTB
Front Hub	Shimano Alivio MT400, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT400, 12x148, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x30c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Dropper Alpha1, 31,6 mm, remote
Saddle	Selle Royal Sauris
Tyres	Schwalbe Smart Sam, Performance, Addix, 29”x2,35”

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 625 Horizontal, frametype, weight 3,5 kg
Charger Type	4 A
Change Time	Up to 5 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

WHISTLE B-Race A7.3



- Bosch Perf. CX Smart System
- Powertube 500Wh
- Led Remote
- 29”
- 10s
- 27 kg

2023

	Silver/Red
40	0116867700
46	0116867710
52	0116867720

Frame	Alu, 29”, Gravity Casting, Integrated battery, Internal routing, Forged interface, 12x148 mm E-Thru
Fork	Suntour XCM, 100 m, Coil, Lockout
Headset	Acros AZF-576, 1,5”, Internal routing
Cranckset	FSA 34T
Rear Derailleur	Shimano 10 spees
Shifters Levers	Shimano 10 speed shifters
Brakes	Shimano BR-MT200, Rotor SM-RT30 180 mm / 180 mm
Cassette	Shimano 10 speed
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano Alivio MT400, 12x148, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x30c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Dropper Alpha1, 31,6 mm, remote
Saddle	Selle Royal Sauris
Tyres	Schwalbe Tough Tom, Active Line, 29”x2,35”

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 500 Horizontal, frametype, weight 2,6 kg
Charger Type	4 A
Change Time	Up to 4 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

B-Race A6.3



- Bosch Perf. CX Smart System
- Powertube 500Wh
- Led Remote
- 29”
- 9s
- 27 kg

2023

	Green/Red
40	0116867800
46	0116867810
52	0116867820

Frame	Alu, 29”, Gravity Casting, Integrated battery, Internal routing, Forged interface, 12x148 mm E-Thru
Fork	Suntour XCM, 100 m, Coil, Lockout
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	FSA 34T
Rear Derailleur	Shimano 9 spees
Shifters Levers	Shimano 9 speed shifters
Brakes	Shimano BR-MT200, Rotor SM-RT30 180 mm / 180 mm
Cassette	Shimano 9 speed
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano Alivio MT400, 12x148, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x30c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 31,6 mm
Saddle	Selle Royal Sauris
Tyres	Schwalbe Smart Sam, Addix, 29”x2,35”

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 500 Horizontal, frametype, weight 2,6 kg
Charger Type	4 A
Change Time	Up to 4 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

Atala B-Cross A8.2



- Bosch Performance CX Cruise
- Powertube 625Wh
- Purion
- 29”
- 10s
- 27 kg

	Blue/Brown
46	0115307000
50	0115307010

Frame	Alu 29”, Hydroformed, integrated battery, tapered, External routing, Forged interface
Fork	Zoom 860 AMS, 100 mm, Coil, Lockout
Headset	FSA No.57BP-1
Cranckset	Miche 34T
Rear Derailleur	Shimano Deore RD-4120, Shadow Plus
Shifters Levers	Shimano Deore SL-M4100 Rapidfire-Plus, 10s
Brakes	Shimano BR-MT200, Rotor SM-RT30 180 mm / 180 mm
Cassette	Shimano CS-M4100 10s 11/46
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Alu bar bore, 31,8 mm
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 31,6 mm
Saddle	Selle Italia Model X
Tyres	Schwalbe Smart Sam, Performance, Addix, 29”x2,35”
Mudguards	SKS A65R
Carriers	Alu, without brackets
External Lights	F: Herrmans Trelock VEO - 50 lumen R: Axa BlueLine LED Lightguide

Motor	Performance CX Cruise 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 625 Horizontal, frametype, weight 3,5 kg
Charger Type	4 A
Change Time	Up to 5 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 60 % Tour: 140 % EMTB: 140 / 340% Turbo: 340 %

Atala B-Cross A7.3



- Bosch Perf. CX Smart System
- Powertube 500Wh
- Led Remote
- 29”
- 10s
- 27 kg

2023

	Polar/Anthracite
40	0115326100
46	0115326110
52	0115326120

Frame	Alu, 29”, Gravity Casting, Integrated battery, Internal routing, Forged interface, 12x148 mm E-Thru
Fork	Suntour XCM, 100 m, Coil, Lockout
Headset	Acros AZF-576, 1,5”, Internal routing
Cranckset	FSA 34T
Rear Derailleur	Shimano 10 spees
Shifters Levers	Shimano 10 speed shifters
Brakes	Shimano BR-MT200, Rotor SM-RT30 180 mm / 180 mm
Cassette	Shimano 10 speed
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano Alivio MT400, 12x148, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x30c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 31,6 mm
Saddle	Selle Royal Sauris
Tyres	Schwalbe Tough Tom, Active Line, 29”x2,35”

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 500 Horizontal, frametype, weight 2,6 kg
Charger Type	4 A
Change Time	Up to 4 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

Atala B-Cross A6.3



- Bosch Perf. CX Smart System
- Powertube 500Wh
- Led Remote
- 29”
- 9s
- 27 kg

2023

	Silver/Red
40	0115326200
46	0115326210
52	0115326220

Frame	Alu, 29”, Gravity Casting, Integrated battery, Internal routing, Forged interface, 12x148 mm E-Thru
Fork	Suntour XCM, 100 m, Coil, Lockout
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	FSA 34T
Rear Derailleur	Shimano 9 spees
Shifters Levers	Shimano 9 speed shifters
Brakes	Shimano BR-MT200, Rotor SM-RT30 180 mm / 180 mm
Cassette	Shimano 9 speed
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano Alivio MT400, 12x148, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x30c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 31,6 mm
Saddle	Selle Royal Sauris
Tyres	Schwalbe Smart Sam, Addix, 29”x2,35”

Motor	Smart System Perf. CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 500 Horizontal, frametype, weight 2,6 kg
Charger Type	4 A
Change Time	Up to 4 hours
Max Assisted Speed	25 km/h
Display	Led Remote
Power	Eco: 60 % Tour+: 60-340 % EMTB: 140-340 % Turbo: 340 %

Atala B-Cross A4.2



- Bosch Perf. Cruise
- Powerpack 400Wh
- Purion
- 29”
- 9s
- 24,7 kg

	Polar/Anthracite
40	0115326100
46	0115326110
52	0115326120

Frame	Alu 29”, Hydroformed, internal powerpack, Tapered, custom tubing, Internal routing, Forged interface
Fork	Zoom 860 AMS, 100 mm, Coil, Lockout
Headset	Acros AZF-576, 1,5”, Internal routing
Cranckset	Miranda, 38T
Rear Derailleur	Shimano Altus RD-M2000 SGS, Shadow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 30,9 mm
Saddle	Selle Royal Sauris
Tyres	Schwalbe Tough Tom, Active Line, 29”x2,35”

Motor	Performance Cruise 36 V, 250 W
Max Torque	65 Nm
Sensor Type	Torque
Battery	Powerpack 400 Horizontal, frametype, weight 2,5 kg
Charger Type	2 A
Change Time	Up to 6,5 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 55 % Tour: 120 % EMTB: 200 % Turbo: 300 %

Atala Y-Cross A4.3



Yamaha PS-X1X3 ST
400Wh
Display A
29”
9s
kg

2023

	Black
42	0115307600
46	0115307610
50	0115307620

Frame	Alu 29”, Hydroformed, Integrated battery, Tapered, External Routing, Forged Interface, quick-relise
Fork	Zoom 860 AMS, 100 mm, Straight, Coil
Headset	FSA No.57BP-1
Cranckset	Miche 34T
Rear Derailleur	Shimano Altus RD-M2000 SGS, Shadow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, 32h
Rims	RODI BLACKROCK23 27.5, 584x23, Black
Stem	Alu, Bar bore 31,8 mm
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 31,6 mm
Saddle	Selle Royal Sauris
Tyres	Schwalbe Smart Sam, Performance,, 27,5”x2,35”

Motor	Pwseries ST 250 W, 36 V
Max Torque	70 Nm
Sensor Type	Torque
Battery	External on downtube, DT400
Charger Type	4 A
Change Time	Up to 3,5 hours
Max Assisted Speed	25 km/h
Display	Display A
Power	

WHISTLE B-Race A5.2



- AM80
- EnergyTube 500Wh
- AM LCD FullColour
- 29”
- 12s
- 26,6 kg

Flat Grey/Neon Red	
40	0116832550
46	0116832560
52	0116832570

Frame	Alu 29”, Hydroformed, internal battery, Tapered, Internal routing, Forged interface
Fork	Zoom 860 AMS, 100 mm, Coil, Lockout
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	FSA, 34T, Megatooth
Rear Derailleur	Sram SX Eagle
Shifters Levers	Sram SX Eagle Single Click Trigger, 12s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Sram PG1210 Eagle 12s, 11/50
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 30,4 mm
Saddle	Selle Royal Sauris
Tyres	Schwalbe Smart Sam, Performance, 29”x2,35”

Motor	AM-80 36 V, 250 W
Max Torque	80 Nm
Sensor Type	Torque
Battery	EnergyTube 500, frametype, weight 2,9 kg
Charger Type	2 A
Change Time	Up to 7 hours
Max Assisted Speed	25 km/h
Display	AM LCD Full-Colour
Power	Mode 1: 50 % Mode 2: 100 % Mode 3: 200 % Mode 4: 300 % Mode 5: 400%

Atala B-Cross A5.2



- AM80
- EnergyTube 500Wh
- AM LCD FullColour
- 29”
- 12s
- 26,6 kg

Anthracite/Black Matt	
40	0115296400
46	0115296410
52	0115296420

Frame	Alu 29”, Hydroformed, internal battery, Tapered, Internal routing, Forged interface
Fork	Zoom 860 AMS, 100 mm, Coil, Lockout
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	FSA, 34T, Megatooth
Rear Derailleur	Sram SX Eagle
Shifters Levers	Sram SX Eagle Single Click Trigger, 12s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Sram PG1210 Eagle 12s, 11/50
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 30,4 mm
Saddle	Selle Royal Sauris
Tyres	Schwalbe Smart Sam, Performance, 29”x2,35”

Motor	AM-80 36 V, 250 W
Max Torque	80 Nm
Sensor Type	Torque
Battery	EnergyTube 500, frametype, weight 2,9 kg
Charger Type	2 A
Change Time	Up to 7 hours
Max Assisted Speed	25 km/h
Display	AM LCD Full-Colour
Power	Mode 1: 50 % Mode 2: 100 % Mode 3: 200 % Mode 4: 300 % Mode 5: 400%

Atala B-Cross A3.2



- AM80
- EnergyTube 500Wh
- AM LCD
- 29”
- 9s
- 24,5 kg

Anthracite/Black Matt	
40	0115296450
46	0115296460
50	0115296470

Frame	Alu 29”, Hydroformed, internal battery, Tapered, Internal routing, Forged interface
Fork	Suntour XCM, 100 mm, Coil
Headset	Acros AZF-576, 1,5”, Internal routing
Cranckset	Miranda, 34T
Rear Derailleur	Shimano Alivio RD-M3100 SGS, Shadow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 30,4 mm
Saddle	Selle Royal Mach
Tyres	Vittoria Barzio, 29”x2,25”

Motor	AM-80 36 V, 250 W
Max Torque	80 Nm
Sensor Type	Torque
Battery	EnergyTube 500, frametype, weight 2,9 kg
Charger Type	2 A
Change Time	Up to 7 hours
Max Assisted Speed	25 km/h
Display	AM LCD
Power	Mode 1: 50 % Mode 2: 100 % Mode 3: 200 % Mode 4: 300 % Mode 5: 400%

Atala B-Cross A2.2



- AM80
- EnergyTube 400Wh
- AM LCD
- 29”
- 9s
- 24,5 kg

Anthracite/Black Matt	
40	0115307500
46	0115307510
50	0115307520

Frame	Alu 29”, Hydroformed, internal battery, Tapered, Internal routing, Forged interface
Fork	Suntour XCM, 100 mm, Coil
Headset	Acros AZF-576, 1,5”, Internal routing
Cranckset	Miranda, 34T
Rear Derailleur	Shimano Alivio RD-M3100 SGS, Shadow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu MTB
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 30,4 mm
Saddle	Selle Royal Mach
Tyres	Vittoria Barzio, 29”x2,25”

Motor	AM-80 36 V, 250 W
Max Torque	80 Nm
Sensor Type	Torque
Battery	EnergyTube 400, frametype, weight 2,8 kg
Charger Type	2 A
Change Time	Up to 6,5 hours
Max Assisted Speed	25 km/h
Display	AM LCD
Power	Mode 1: 50 % Mode 2: 100 % Mode 3: 200 % Mode 4: 300 % Mode 5: 400%

E-Gravel

Scegliere i tuoi itinerari senza doverli pianificare, affrontando sia sentieri off-road sia lunghi tratti di asfalto, è possibile con una gravel eBike. Ideale per viaggi avventurosi e perfettamente performanti anche in città, la gravel è agile, affidabile e confortevole.

With a gravel is possible to choose your own routes without planning team, tackle both off-road trails and log stretches of asphalt. Ideal for adventours trips and perfectly performing even in the city, the gravel is agile, reliable and comfortable.

FAZUA



Flow ADV E2.0



Fazua Ev 2.0
Energy 250x
RMT
28”
11s
kg

2023

	Black / Red
54	0116820800
58	0116820810

Frame	Alu, hydroformed, smooth welding, Flat mount disc brake, tapered, 12x142 mm
Fork	Carbon monocoque, Tapered, 12x100 mm, Flat mount disc brake
Headset	FSA No.57E tapered 1"1/2
Crankset	FSA CK-746, 40T
Rear Derailleur	Shimano GRX RD-R812
Shifters Levers	Shimano GRX ST-RX600 1x11s
Brakes	Shimano GRX BR-RX400, Rotor SM-RT64 160 mm/160 mm
Cassette	Shimano CS-M7000 11s 11/42
Wheels	Shimano WH-RS370
Stem	FSA ST-OS 97
Handlebar	FSA NS Adventure Compact
Seatpost	FSA Energy SBS
Saddle	Selle Royal Asphalt
Tyres	Schwalbe G-One Bite, 700x40”

Motor	Fazua 36V, 250W
Max Torque	60 Nm
Sensor Type	Torque
Battery	Fazua Energy 250x, weight 1,38 kg
Charger Type	2 A
Change Time	Up to 3,5 hours
Max Assisted Speed	25 km/h
Display	RMT
Power	Breeze: 75 % River: 150 % Rocket: 240 %

Flow ADV Ride



Fazua Ride50
Energy 250x
RMT RX
28”
11s
kg

2023

	Black / Red
58	0116820700

Frame	Alu, hydroformed, smooth welding, Flat mount disc brake, tapered, 12x142 mm
Fork	Carbon monocoque, Tapered, 12x100 mm, Flat mount disc brake
Headset	FSA No.57E tapered 1"1/2
Crankset	FSA CK-746, 40T
Rear Derailleur	Shimano GRX RD-R812
Shifters Levers	Shimano GRX ST-RX600 1x11s
Brakes	Shimano GRX BR-RX400, Rotor SM-RT64 160 mm/160 mm
Cassette	Shimano CS-M7000 11s 11/42
Wheels	Shimano WH-RS370
Stem	FSA ST-OS 97
Handlebar	FSA NS Adventure Compact
Seatpost	FSA Energy SBS
Saddle	Selle Royal Asphalt
Tyres	Schwalbe G-One Bite, 700x40”

Motor	Fazua 36V, 250W
Max Torque	60 Nm
Sensor Type	Torque
Battery	Fazua Energy 250x, weight 1,38 kg
Charger Type	2 A
Change Time	Up to 3,5 hours
Max Assisted Speed	25 km/h
Display	RMT RX
Power	Breeze: 75 % River: 150 % Rocket: 240 %

E-Trekking

Stare a contatto con la natura, esplorare, scoprire, combinando il relax con l'esercizio fisico.
Solamente la tua eBike rende ogni viaggio più piacevole.

Being surrounded by nature, discovr, explore, combining relax with exercise.
Your eBike makes every journey more pleasant.

BOSCH FAZUA

ANEO agile ANEO by ANANDA easy



Sp. Urban C9.1



- Bosch Perf. CX Cruise
- Powertube 625Wh - 500Wh
- KIOX
- 29”
- 12s
- 27,8 kg

	MAN: Black/ Anthracite
48	0116832815
52	0116832825

Frame	Full Carbon 29”, Toray T700, dual integrated battery, oversize head tube, 12x148 mm E-Thru
Fork	Carbon, Tapered 1”1/2, 15x110
Headset	Acros AZF-581, 1,5”, Internal routing
Cranckset	FSA 38T, Megatooth
Rear Derailleur	Shimano XT RD-M8100 SGS, Shadow Plus
Shifters Levers	Shimano Deore SL-M6100 Rapidfire-Plus, 12s
Brakes	Shimano BR-MT420, Four piston, Rotor SM-RT30 203 mm / 203 mm
Cassette	Shimano CS-M6100 12s 10/51
Pedals	Alu TKK
Front Hub	Shimano Alivio MT400, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT410, 12x148, CL, Microspline, 32h
Rims	Radiale X25, 25x622, eBike ready, Asymmetric
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 31,6 mm
Saddle	Selle Royal Essenza
Tyres	Schwalbe Energizer Plus, Performance, GreenGuard, TwinSkin, 700x55

Motor	Performance CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 625 Horizontal & Powertube 500 Horizontal
Charger Type	4 A
Change Time	Up to 9,4 hours
Max Assisted Speed	25 km/h
Display	KIOX
Power	Eco: 60 % Tour: 140 % EMTB: 140 / 340 % Turbo: 340 %

WHISTLE Sp. Urban C8.1



- Bosch Perf. CX Cruise
- Powertube 625Wh - 500Wh
- Purion
- 29”
- 12s
- 28,3 kg

	MAN: Black/ Anthracite
48	0116832915
52	0116832925

	LADY: Black/ Anthracite
44	0116832900

Frame	Full Carbon 29”, Toray T700, dual integrated battery, oversize head tube, 12x148 mm E-Thru
Fork	Rock Shox 35 Silver R, 100 mm, Maxle Lite 15x110 mm, Coil, Tapered, Lockout, E-Bike
Headset	Acros AZF-576, 1,5”, Internal routing
Cranckset	FSA 38T, Megatooth
Rear Derailleur	Sram SX Eagle
Shifters Levers	Sram SX Eagle Single Click Trigger, 12s
Brakes	Shimano BR-MT420, Four piston, Rotor SM-RT30 203 mm / 203 mm
Cassette	Sram PG1210 Eagle 12s, 11/50
Pedals	Alu MTB
Front Hub	Shimano Alivio MT400, 15x110, CL, 32h
Rear Hub	Shimano Alivio MT410, 12x148, CL, HG, 32h
Rims	RADIALE X25, eDesign | Asymmetric, Tubeless Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 31,6 mm
Saddle	Selle Royal Essenza
Tyres	Schwalbe Smart Sam, K-Guard, 29”x2,35”

Motor	Performance CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 625 Horizontal & Powertube 500 Horizontal
Charger Type	4 A
Change Time	Up to 9,4 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 60 % Tour: 140 % EMTB: 140 / 340 % Turbo: 340 %



WHISTLE Sp. Urban C7.2



- Bosch Perf. CX Cruise
- Powertube 625Wh
- Purion
- 29”
- 10s
- 26,7 kg

MAN: Black/ Green	
48	0116851915
52	0116851925

LADY: Black/ Green	
44	0116851900

Frame	Full Carbon 29”, Toray T700, dual integrated battery, oversize head tube, 12x148 mm E-Thru
Fork	Zoom 860S, Travel 100 mm, Coil, Lockout
Headset	Acros AZF-575, 1,5”, Internal routing
Cranckset	FSA 38T, Megatooth
Rear Derailleur	Shimano Deore RD-M5120, Shadow Plus
Shifters Levers	Shimano Deore SL-M4100 Rapidfire-Plus, 10s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-M4100 10s 11/46
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano Alivio MT400, 12x148, CL, HG, 32h
Rims	RADIALE X25, eDesign | Asymmetric, Tubeless Ready, 622x25c
Stem	Satori Viper0, 31,8 mm, Internal routing
Handlebar	Alu Low Rise, 720 mm
Seatpost	Alu, 31,6 mm
Saddle	Atala Trekking
Tyres	Schwalbe Tough Tom K-Guard, 57-622

Motor	Performance CX 36 V, 250 W
Max Torque	85 Nm
Sensor Type	Torque
Battery	Powertube 625 Horizontal & Powertube 500 Horizontal
Charger Type	4 A
Change Time	Up to 9,4 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 60 % Tour: 140 % EMTB: 140 / 340 % Turbo: 340 %



Audere



Fazua Evation 2.0
Fazua 255Wh
LED
29”
10s
kg

Dark Green/ Silver	
49	0111348100
54	0111348110
59	0111348120

Frame	Alu, hydroformed, smooth welding, Post mount disc brake, Internal routing, tapered, 12x142 mm
Fork	Suntour NRX, 63 mm, Coil, Tapered, Lockout
Headset	FSA No.57B tapered 1"1/2
Cranckset	FSA, Miche 38T
Rear Derailleur	Shimano XT RD-T8000 SGS, Shadow
Shifters Levers	Shimano Deore SL-M6000 Rapidfire-Plus, 10s
Brakes	Shimano Deore BR-T6000, Rotor SM-RT54 180 mm/180 mm
Cassette	Shimano CS-HG50 10s 11/36
Pedals	Alu TKK
Front Hub	Shimano DH-3D37, Dynamo, 6V, 3W
Rear Hub	Shimano MT400, 32h, 12x142 mm
Rims	Rodi Tryp25, 25x622, 32h, eBike ready
Stem	Satori UP3e, Internal routing, Bar bore 31,8 mm
Handlebar	Satori Noirette City, 630 mm
Seatpost	Satori Xopic2, Suspended, 31,6 mm
Saddle	Selle Royal Lookin
Tyres	Schwalbe Marathon E-Plus, Smartguard 2.0, Reflex, 700x50

Motor	Fazua 36 V, 250 W
Max Torque	60 Nm
Sensor Type	Torque
Battery	Fazua Evation 255Wh, weight 1,38 kg
Charger Type	2 A
Change Time	Up to 3,5 hours
Max Assisted Speed	25 km/h
Display	LED
Power	Breeze: 75 % River: 150 % Rocket: 240 %

Atala B-Tour A8.2



Bosch Perf. CX Cruise
Powertube 625Wh
Purion
29”
10s
kg

	MAN: Black/ Anthracite
50	0115307700
53	0115307710
59	0115307720

	LADY: Blue/ Anthracite
45	0115307800
50	0115307810

Frame	Alu 700C, Hydroformed, internal powertube, custom tubing, Internal routing, Forged interface
Fork	Zoom 188NS AMS, Travel 65 mm, Coil, Lockout
Headset	Acros AZF-585, 1,5”, Internal routing
Cranckset	FSA 38T
Rear Derailleur	Shimano Deore RD-M5120, Shadow Plus
Shifters Levers	Shimano Deore SL-M4100 Rapidfire-Plus, 10s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-M4100 10s 11/46
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano Alivio MT400, 12x148, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Satori Noirette City, 630 mm
Handlebar	Alu Low Rise, 720 mm
Seatpost	Satori Harmony, Suspended, 31,6 mm
Saddle	Atala Memory Foam Trekking
Tyres	Schwalbe Energizer Active Plus, Greenguard, TwinSkin, 700x55

Motor	Performance 36 V, 250 W
Max Torque	65 Nm
Sensor Type	Torque
Battery	Powertube 600 Horizontal, frametype, weight 2,8kg
Charger Type	2 A
Change Time	Up to 9 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 55 % Tour: 120 % Sport: 200 % Turbo: 300 %

Atala B-Tour A7.1



- Bosch Perf. Cruise
- Powertube 500Wh
- Purion
- 29”
- 9s
- 28,3 kg

	MAN: Black/ Anthracite
50	0115307700
53	0115307710
59	0115307720

	LADY: Blue/ Anthracite
45	0115307800
50	0115307810

Frame	Alu 700C, Hydroformed, internal battery, custom tubing, Internal routing, Forged interface
Fork	Suntour NEX-E25, 63 mm, Coil, Lockout
Headset	Acros AZF-585, 1,5”, Internal routing
Cranckset	FSA 38T
Rear Derailleur	Shimano Alivio RD-M3100 SGS, Shadow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	Radiale L25V, 25x622, eBike ready
Stem	Satori Python, 31,8 mm, Adjustable, Internal routing
Handlebar	Satori Noirette City, 630 mm
Seatpost	Satori Harmony, Suspended, 31,6 mm
Saddle	Atala Memory Foam Trekking
Tyres	Schwalbe Energizer Active Plus, Greenguard, TwinSkin, 700x50c

Motor	Performance Cruise 36 V, 250W
Max Torque	65 Nm
Sensor Type	Torque
Battery	Powertube 500 Horizontal, frametype, weight 2,8kg
Charger Type	2 A
Change Time	Up to 7,5 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 55 % Tour: 120 % Sport: 200 % Turbo: 300 %



Atala B-Tour A6.2



- Bosch Active Plus Cruise
- Powerpack 500Wh
- Purion
- 29”
- 9s
- kg

MAN: Satin Grey	
50	0115307900

LADY: Brown/ Anthracite	
45	0115308000

Frame	Alu 700C, Hydroformed, internal powerpack, custom tubing, Internal routing, Forged interface
Fork	Zoom 187D AMS, Travel 65 mm, Coil
Headset	Acros AZF-585, 1,5”, Internal routing
Cranckset	Miranda 38T
Rear Derailleur	Shimano Alivio RD-M3100 SGS, Shadow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Satori Python, 31,8 mm, Adjustable, Internal routing
Handlebar	Satori Noirette City, 630 mm
Seatpost	Satori Harmony, Suspended, 30,9 mm
Saddle	Atala Memory Foam Trekking
Tyres	Schwalbe Energizer Active Plus, Greenguard, TwinSkin, 700x50c

Motor	Active Plus Cruise 36 V, 250W
Max Torque	50 Nm
Sensor Type	Torque
Battery	Powerpack 500 Horizontal, frametype, weight 2,6kg
Charger Type	2 A
Change Time	Up to 7,5 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 55 % Tour: 120 % Sport: 200 % Turbo: 300 %



Atala B-Tour A6.1



- Bosch Perf. Cruise
- Powertube 500Wh
- Purion
- 29”
- 9s
- 28,3 kg

MAN: Anthracite/ Green Matt	
53	0115297110
59	0115297120

LADY: Blue/ Pastel Grey	
50	0115297210
53	0115297220

Frame	Alu 700C, Hydroformed, integrated battery, custom tubing, Internal routing, Forged interface
Fork	Suntour NEX-E25, 63 mm, Coil
Headset	Acros AZF-585, 1,5”, Internal routing
Cranckset	Miranda 38T
Rear Derailleur	Shimano Alivio RD-M3100 SGS, Shadow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	Radiale L25V, 25x622, eBike ready
Stem	Satori Python, 31,8 mm, Adjustable, Internal routing
Handlebar	Satori Noirette City, 630 mm
Seatpost	Satori Harmony, Suspended, 31,6 mm
Saddle	Atala Memory Foam Trekking
Tyres	Schwalbe Energizer Active Plus, Punctureguard, TwinSkin, 700x50C

Motor	Performance 36 V, 250W
Max Torque	65 Nm
Sensor Type	Torque
Battery	Powertube 400 Horizontal, frametype, weight 2,8kg
Charger Type	2 A
Change Time	Up to 6,5 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 55 % Tour: 120 % Sport: 200 % Turbo: 300 %



Atala B-Tour A5.1



- Bosch Active Plus Cruise
- Powerpack 400Wh
- Purion
- 29”
- 9s
- 28 kg

MAN: Green/ Anthracite	
50	0115297300
53	0115297310

LADY: White/ Pastel Grey	
45	0115297400
50	0115297410
53	0115297420

Frame	Alu 700C, Hydroformed, internal powerpack, custom tubing, Internal routing, Forged interface
Fork	Suntour NEX-E25, 63 mm, Coil
Headset	Acros AZF-585, 1,5”, Internal routing
Cranckset	Miranda 38T
Rear Derailleur	Shimano Alivio RD-M3100 SGS, Shadow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	Radiale L25V, 25x622, eBike ready
Stem	Satori Python, 31,8 mm, Adjustable, Internal routing
Handlebar	Satori Noirette City, 630 mm
Seatpost	Satori Harmony, Suspended, 31,6 mm
Saddle	Atala Memory Foam Trekking
Tyres	Schwalbe Energizer Active Plus, Punctureguard, TwinSkin, 700x50C

Motor	Active Plus Cruise 36 V, 250W
Max Torque	50 Nm
Sensor Type	Torque
Battery	Powerpack 400Wh, frametype, weight 2,5kg
Charger Type	2 A
Change Time	Up to 6,5 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 40 % Tour: 100 % Sport: 180 % Turbo: 270 %



Atala B-Tour A4.1



- Bosch Active Cruise
- Powerpack 400Wh
- Purion
- 29”
- 7s
- 27,5 kg

MAN: Anthracite/ Black	
50	0115297500
53	0115297510

LADY: Green/ Anthracite	
45	0115297600
50	0115297610
53	0115297620

Frame	Alu 700C, Hydroformed, internal powerpack, custom tubing, Internal routing, Forged interface
Fork	Suntour NEX-E25, 63 mm, Coil
Headset	Acros AIX-540, 1,5”, Internal routing
Cranckset	Miranda 38T
Rear Derailleur	Shimano RD-TY500D
Shifters Levers	Shimano Tourney SL-RS36, Revoshift, 7s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-HG200 7s 12/32
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TY505, CL, HG, 32h
Rims	Radiale L25V, 25x622, eBike ready
Stem	Alu, ahead, adjustable, 31,8 mm
Handlebar	Alu City, 640 mm
Seatpost	Alu, 31,6 mm
Saddle	Atala Memory Foam Trekking
Tyres	Schwalbe Energizer Active Plus, Punctureguard, TwinSkin, 700x50C

Motor	Active Cruise 36 V, 250W
Max Torque	40 Nm
Sensor Type	Torque
Battery	Powerpack 400Wh, frametype, weight 2,5kg
Charger Type	2 A
Change Time	Up to 6,5 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 40 % Tour: 100 % Sport: 180 % Turbo: 270 %



Atala Clever A9.3 gen2





Agile Gen2
Phylion 603Wh
Atala A10 LCD CAN
28”
9s
kg

2023

MAN: Blue Navy	
49	0115310500

LADY: Green Forest	
45	0115310600

Frame	Alu. Hydroformed 700c, internal battery, internal cables
Fork	HL CH-187 HLO 700c, alu with alu crown, 65mm travel, 30mm stanchions
Headset	FSA integrated ahead 1”1/8
Cranckset	Alu 170mm, FSA 38T
Rear Derailleur	Shimano Alivio RD-M3100
Shifters Levers	Shimano Alivio SL-M3100, 9s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 180 mm CL
Cassette	Shimano HG200 9s 11/36
Pedals	Alu Comfort
Hub	Shimano TX505, CL, 32h, quick release
Rims	Radiale E25 700c, double wall, 32h, disc
Stem	Au over, ahead, adjustable
Handlebar	Alu over TKK, 640mm, rise 25mm
Seatpost	Suspended 40mm, 30,9mm
Saddle	Selle Royal Lancia
Tyres	Schwalbe Road Cruiser 700x55c, with reflecting line, puncture proof
Mudguards	Single stay speedy, edge
Chaincover	L type, edge
Carriers	Rear alu 14mm with spring, 25kg load
External Lights	Axa front (30 lux) and rear LED, controlled by display and twilight sensor

Motor	Agile Gen2 CAN 36 V, 250W
Max Torque	100 Nm
Sensor Type	Torque
Battery	Phylion Li-Ion 36V, 603Wh, inside frame, with Smart BMS CAN
Charger Type	2 A Europlug
Change Time	100%: 8h:52m / 80%: 6h42m
Max Assisted Speed	25 km/h
Display	Atala A10 LCD CAN, glass/metal with remote control
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control Speed information Battery information

Atala Clever A8.3 gen2



Agile Gen2
Phylion 522Wh
Atala A10 LCD CAN
28”
8s
kg

2023

MAN: Anthracite	
49	0115310750
54	0115310750

LADY: Ultralight	
45	0115310800

Frame	Alu. Hydroformed 700c, internal battery, internal cables
Fork	HL CH-187 HLO 700c, alu with alu crown, 65mm travel, 30mm stanchions
Headset	FSA integrated ahead 1”1/8
Cranckset	Alu 170mm, FSA 38T
Rear Derailleur	Shimano Acera RD-M3020
Shifters Levers	Shimano SL-M315 PushPull, 8s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 180 mm CL
Cassette	Shimano HG200 8s 12/32
Pedals	Alu Comfort
Hub	Shimano TX505, CL, 32h, quick release
Rims	Radiale E25 700c, double wall, 32h, disc
Stem	Au over, ahead, adjustable
Handlebar	Alu over TKK, 640mm, rise 25mm
Seatpost	Suspended 40mm, 30,9mm
Saddle	Selle Royal Lancia
Tyres	Schwalbe Road Cruiser 700x47c, with reflecting line, puncture proof
Mudguards	Single stay speedy, edge
Chaincover	L type, edge
Carriers	Rear alu 14mm with spring, 25kg load
External Lights	Axa front (30 lux) and rear LED, controlled by display and twilight sensor

Motor	Agile Gen2 CAN 36 V, 250W
Max Torque	100 Nm
Sensor Type	Torque
Battery	Phylion Li-Ion 36V, 522Wh, inside frame, with Smart BMS CAN
Charger Type	2 A Europlug
Change Time	100%: 7h:45m / 80%: 5h48m
Max Assisted Speed	25 km/h
Display	Atala A10 LCD CAN, glass/metal with remote control
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control Speed information Battery information

Atala Clever A7.2



- Agile Can
- Phylion 418Wh
- Atala A10 LCD Smart
- 28”
- 8s
- 28,3 kg

MAN: White/ Anthracite	
49	0115309200
54	0115309250

LADY: Anthracite/ Red	
45	0115309300
49	0115309350

Frame	Alu. Hydroformed 700c, integrated battery, internal cables
Fork	Suntour NEX 700c, alu with alu crown, 50mm
Headset	FSA integrated 1”1/8
Cranckset	AM80 alu 170mm, FSA 38T
Rear Derailleur	Shimano Acera RD-M360
Shifters Levers	Shimano SL-M315 PushPull, 8s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 180 mm CL
Cassette	Shimano HG200 8s 12/32
Pedals	Resin antislip
Hub	Shimano TX505, CL, 32h, quick release
Rims	Rodi 700c, double wall w/eylets, 32h, disc
Stem	Byte alu over, ahead, adjustable
Handlebar	Alu over TKK, 640mm, rise 25mm
Seatpost	Byte suspended 40mm, 27,2mm
Saddle	Selle Royal Lancia
Tyres	Byte Trento 700x45c, with reflecting line
Mudguards	Single stay speedy
Chaincover	Plastic, L type
Carriers	Rear alu 14mm with spring, 25kg load
External Lights	Axa front (30 lux) and rear LED, controlled by display and twilight sensor

Motor	AM80 Agile CAN 36 V, 250W
Max Torque	80 Nm
Sensor Type	Torque
Battery	Phylion Li-Ion 36V, 418Wh, on frame, with Smart BMS CAN
Charger Type	2 A Europlug
Change Time	100%: 6h:30m / 80%: 4h40m
Max Assisted Speed	25 km/h
Display	Atala A10 LCD Smart CAN, with remote control
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control Speed information Battery information



Atala Clever A6.2



- Agile Can
- Phylion 418Wh
- Atala A15 LED CAN
- 28”
- 7s
- 28 kg

MAN: Anthracite/ Red	
49	0115309400

LADY: Blue/ Pastel Grey	
45	0115309500

Frame	Alu. Hydroformed 700c, integrated battery, internal cables
Fork	Suntour NEX 700c, alu with alu crown, 50mm
Headset	FSA integrated 1”1/8
Cranckset	AM80 alu 170mm, FSA 38T
Rear Derailleur	Shimano Altus RD-M310
Shifters Levers	Shimano SL-M315 PushPull, 7s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 160 mm CL
Cassette	Shimano HG200 7s 12/32
Pedals	Resin antislip
Hub	Shimano TX505, CL, 32h, quick release
Rims	Rodi 700c, double wall w/eylets, 32h, disc
Stem	Byte alu, ahead, adjustable
Handlebar	Byte steel TKK
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Lancia
Tyres	Byte Trento 700x45c, with reflecting line
Mudguards	Single stay speedy
Chaincover	Plastic, L type
Carriers	Rear alu 14mm with spring, 25kg load
External Lights	Axa front (30 lux) and rear LED, controlled by display

Motor	AM80 Agile CAN 36 V, 250W
Max Torque	80 Nm
Sensor Type	Torque
Battery	Phylion Li-Ion 36V, 418Wh, on frame, with Smart BMS CAN
Charger Type	2 A Europlug
Change Time	100%: 6h:30m / 80%: 4h40m
Max Assisted Speed	25 km/h
Display	Atala A15 LED CAN, Power +/-
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control



Atala District 6.3



- AM80 Easy
- Phylion 418Wh
- Atala A19 Digit LED UART
- 28”
- 7s
- 24,5 kg

2023

MAN: Anthracite	
49	0115311100

LADY: Ultralight	
45	0115311200

Frame	Alu. Hydroformed 700c, integrated battery, internal cables
Fork	HL CH-187 700c, alu with alu crown, 65mm travel, 30mm stanchions
Headset	FSA integrated ahead 1”1/8
Cranckset	Alu 170mm, Miche 38T
Rear Derailleur	Shimano Tourney RD-TY500
Shifters Levers	Shimano SL-M315 PushPull, 7s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 160 mm CL
Cassette	Shimano HG200 7s 12-32
Pedals	Resin antislip
Hub	Shimano TX505, CL, 32h, quick release
Rims	Rodi 700c, double wall w/eylets, 32h, disc
Stem	Byte alu, ahead, adjustable
Handlebar	Byte alu TKK, 630mm, rise 30mm
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Shadow
Tyres	Byte Trento 700x45c, with reflecting line
Mudguards	Single stay speedy, edge
Chaincover	L type, edge
Carriers	Rear steel 10mm with spring, no bracket, 25kg load
External Lights	Axa front (15 lux) and rear LED, controlled by display

Motor	AM80 Easy UART 36 V, 250W
Max Torque	70 Nm
Sensor Type	Torque
Battery	Phylion Li-Ion 36V, 418Wh, on frame, with Smart BMS UART
Charger Type	2 A Europlug
Change Time	100%: 6h:18m / 80%: 4h38m
Max Assisted Speed	25 km/h
Display	Atala A19 Digit LED UART
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control Speed information Battery range %



E-Urban

Spostarsi velocemente in città è sempre più difficile: strade intasate, metro affollatissime, treni in ritardo fanno ormai parte del passato.
L'eBike ti permette questo e molto altro, diventando parte integrante della mobilità urbana.

Moving quickly in the city is more and more difficult: congested streets, stuffy subways, train delays.
Not any more. The eBike makes commuting easier, becoming an essential part of urban mobility.



Atala B-Easy A7.1



- Bosch Active Plus Cruise
- Powerpack 400Wh
- Purion
- 29”
- 9s
- 26 kg

	Black/ Grey Matt
45	0115297900
50	0115297910

Frame	Alu 700C, hydroformed, easy access, internal powerpack, custom tubing, Internal routing, Forged interface
Fork	Suntour NEX, 63 mm, Coil
Headset	Acros AZF-585, 1,5”, Internal routing
Cranckset	Miranda 38T
Rear Derailleur	Shimano Altus RD-M2000 SGS, Shadow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	Radiale L25V, 25x622, eBike ready
Stem	Satori Python, 31,8 mm, Adjustable, Internal routing
Handlebar	Satori Noirette City, 630 mm
Seatpost	Alu, 31,6 mm
Saddle	Atala Memory Foam City
Tyres	Schwalbe Energizer Active Plus, Punctureguard, TwinSkin, 700x50C

Motor	Active Plus Cruise 36 V, 250W
Max Torque	50 Nm
Sensor Type	Torque
Battery	Powerpack 400Wh, frametype, weight 2,5kg
Charger Type	2 A
Change Time	Up to 6,5 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 40 % Tour: 100 % Sport: 180 % Turbo: 270 %

Atala B-Easy A6.1



- Bosch Active Plus Cruise
- Powerpack 400Wh
- Purion
- 29”
- 9s
- 26 kg

	White/ Dark Red
47	0115298000
50	0115298010

Frame	Alu 700C, hydroformed, easy access, custom tubing, Internal routing, Forged interface
Fork	Suntour NEX, 63 mm, Coil
Headset	Acros AZF-585, 1,5”, Internal routing
Cranckset	Miranda 38T
Rear Derailleur	Shimano Altus RD-M2000 SGS, Shadow
Shifters Levers	Shimano Altus SL-M2010 Rapidfire, 9s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm / 180 mm
Cassette	Shimano CS-HG200 9s 11/36
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG, 32h
Rims	Radiale L25V, 25x622, eBike ready
Stem	Satori Python, 31,8 mm, Adjustable, Internal routing
Handlebar	Satori Noirette City, 630 mm
Seatpost	Alu, 30,9 mm
Saddle	Atala Memory Foam City
Tyres	Schwalbe Energizer Active Plus, Punctureguard, TwinSkin, 700x50C

Motor	Active Plus Cruise 36 V, 250W
Max Torque	50 Nm
Sensor Type	Torque
Battery	Powerpack 400Wh, frametype, weight 2,5kg
Charger Type	2 A
Change Time	Up to 6,5 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 40 % Tour: 100 % Sport: 180 % Turbo: 270 %

Atala B-Easy A5.2



- Bosch Active Cruise
- Powerpack 300Wh
- Purion
- 29”
- 7s
- 24,2 kg

Black/ Anthracite	
47	0115309100

Frame	Alu 700C, hydroformed, easy access, custom tubing, Internal routing, Forged interface
Fork	Zoom 187D AMS, Travel 65 mm, Coil
Headset	Acros AZF-585, 1,5”, Internal routing
Cranckset	Miranda 38T
Rear Derailleur	Shimano RD-TY500D
Shifters Levers	Shimano Tourney SL-RS36, Revoshift, 7s
Brakes	Shimano BR-MT200, Rotor SM-RT10 180 mm/180 mm
Cassette	Shimano CS-HG200 7s 12/32
Pedals	Alu TKK
Front Hub	Shimano TX505, CL, 32h
Rear Hub	Shimano TX505, CL, HG 7, 32h
Rims	RADIALE E25, eBike Ready, Tubeless Ready, 622x25c
Stem	Alu, ahead, adjustable, 31,8 mm
Handlebar	Alu City, 640 mm
Seatpost	Alu, 30,9 mm
Saddle	Selle Royal Wave RVS
Tyres	Schwalbe Energizer Active Plus, Punctureguard, TwinSkin, 700x50C

Motor	Active Cruise 36 V, 250W
Max Torque	40 Nm
Sensor Type	Torque
Battery	Powerpack 300Wh, frametype, weight 2kg
Charger Type	2 A
Change Time	Up to 5 hours
Max Assisted Speed	25 km/h
Display	Purion
Power	Eco: 40 % Tour: 100 % Sport: 170 % Turbo: 250 %

Atala Cult 9.3 gen2



- Agile Gen2
- Phylion 603Wh
- Atala A10 LCD CAN
- 28”
- 9s
- kg

2023

	Anthracite Matt
45	0115311300

Frame	Alu. Hydroformed 700c, easy access, internal battery, internal cables
Fork	HL CH-188NS HLO 700c, alu with alu crown, 65mm travel, 32mm stanchions, whith hydraulic lockout
Headset	FSA integrated ahead 1”1/8
Cranckset	Alu 170mm, FSA 38T
Rear Derailleur	Shimano Alivio RD-M3100
Shifters Levers	Shimano Alivio SL-M3100, 9s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 180 mm CL
Cassette	Shimano HG200 9s 11/36
Pedals	Alu Comfort
Hub	Shimano TX505, CL, 32h, quick release
Rims	Radiale E25 700c, double wall, 32h, disc
Stem	Au over, ahead, adjustable
Handlebar	Alu over TKK, 640mm, rise 25mm
Seatpost	Suspended 40mm, 30,9mm
Saddle	Selle Royal Aurorae
Tyres	Schwalbe Energizer Plus 700x55c, with reflecting line, puncture proof
Mudguards	Single stay speedy, edge
Chaincover	L type, edge
Carriers	Rear alu 14mm with spring, 25kg load
External Lights	Axa front (30 lux) and rear LED, controlled by display and twilight sensor

Motor	Agile Gen2 CAN 36 V, 250W
Max Torque	100 Nm
Sensor Type	Torque
Battery	Phylion Li-Ion 36V, 603Wh, inside frame, with Smart BMS CAN
Charger Type	2 A Europlug
Change Time	100%: 8h:52m / 80%: 6h42m
Max Assisted Speed	25 km/h
Display	Atala A10 LCD CAN, glass/metal with remote control
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control Speed information Battery information

Atala Cult 8.3 gen2



Agile Gen2
Phylion 522Wh
Atala A10 LCD CAN
28”
9s
kg

2023

	Green Forest
45	0115311400
49	0115311450

Frame	Alu. Hydroformed 700c, easy access, internal battery, internal cables
Fork	Suntour NEX 700c, alu with alu crown, 63mm travel
Headset	FSA integrated ahead 1”1/8
Cranckset	Alu 170mm, FSA 38T
Rear Derailleur	Shimano Acera RD-M3020
Shifters Levers	Shimano Tourney SL-RV400 RevoShift, 8s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 180 mm CL
Cassette	Shimano HG200 9s 11/36
Pedals	Alu Comfort
Hub	Shimano TX505, CL, 32h, quick release
Rims	Radiale E25 700c, double wall, 32h, disc
Stem	Au over, ahead, adjustable
Handlebar	Alu over TKK, 640mm, rise 25mm
Seatpost	Suspended 40mm, 30,9mm
Saddle	Selle Royal Aurorae
Tyres	Schwalbe Road Cruiser 700x47c, with reflecting line, puncture proof
Mudguards	Single stay speedy, edge
Chaincover	L type, edge
Carriers	Rear alu 14mm with spring, 25kg load
External Lights	Axa front (30 lux) and rear LED, controlled by display and twilight sensor

Motor	Agile Gen2 CAN 36 V, 250W
Max Torque	100 Nm
Sensor Type	Torque
Battery	Phylion Li-Ion 36V, 522Wh, inside frame, with Smart BMS CAN
Charger Type	2 A Europlug
Change Time	100%: 7h:45m / 80%: 5h48m
Max Assisted Speed	25 km/h
Display	Atala A10 LCD CAN, glass/metal with remote control
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control Speed information Battery information

Atala Cult 7.2 28”



- Agile CAN
- Phylion 418Wh
- Atala A10 LCD CAN
- 28”
- 7s
- 26,7 kg

Pastel Grey/Blue Matt	
45	0115309700

Frame	Alu. Hydroformed 700c, easy access, internal battery, internal cables
Fork	Suntour NEX 700c, alu with alu crown, 50mm
Headset	FSA integrated ahead 1”1/8
Cranckset	AM80 Alu 170mm, Miche 38T
Rear Derailleur	Shimano Altus RD-M310
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 160 mm CL
Cassette	Shimano HG200 7s 12/32
Pedals	Resin antislip
Hub	Shimano TX505, CL, 32h, quick release
Rims	Rodi 700c, double wall w/eylets, 32h, disc
Stem	Byte alu over, ahead, adjustable
Handlebar	Byte Alu over
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Aurorae w/elastomer
Tyres	Byte Trento 700x45c, with reflecting line
Mudguards	Single stay speedy
Chaincover	Plastic, L type
Carriers	Rear alu 14mm with spring, 25kg load
External Lights	Axa front (15 lux) and rear LED, controlled by display and twilight sensor

Motor	AM80 Agile CAN 36 V, 250W
Max Torque	80 Nm
Sensor Type	Torque
Battery	Phylion Li-Ion 36V, 418Wh, on frame, with Smart BMS CAN
Charger Type	2 A Europlug
Change Time	100%: 6h:30m / 80%: 4h40m
Max Assisted Speed	25 km/h
Display	Atala A10 LCD CAN, glass/metal with remote control
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control Speed information Battery information

Atala Cult 7.2 26”



- Agile CAN
- Phylion 418Wh
- Atala A10 LCD CAN
- 26”
- 7s
- 26,7 kg

Pastel Grey/Blue Matt	
45	0115309800

Frame	Alu. Hydroformed 26’’, easy access, internal battery, internal cables
Fork	Suntour NEX 26’’, alu with alu crown, 50mm
Headset	FSA integrated ahead 1”1/8
Cranckset	AM80 Alu 170mm, Miche 38T
Rear Derailleur	Shimano Altus RD-M310
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 160 mm CL
Cassette	Shimano HG200 7s 12/32
Pedals	Resin antislip
Hub	Shimano TX505, CL, 32h, quick release
Rims	Rodi 26’’, double wall w/eylets, 32h, disc
Stem	Byte alu over, ahead, adjustable
Handlebar	Byte Alu over
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Aurorae w/elastomer
Tyres	Byte Garda 26”x1,75”, with reflecting line
Mudguards	Single stay speedy
Chaincover	Plastic, L type
Carriers	Rear alu 14mm with spring, 25kg load
External Lights	Axa front (15 lux) and rear LED, controlled by display and twilight sensor

Motor	AM80 Agile CAN 36 V, 250W
Max Torque	80 Nm
Sensor Type	Torque
Battery	Phylion Li-Ion 36V, 418Wh, on frame, with Smart BMS CAN
Charger Type	2 A Europlug
Change Time	100%: 6h:30m / 80%: 4h40m
Max Assisted Speed	25 km/h
Display	Atala A10 LCD CAN, glass/metal with remote control
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control Speed information Battery information

Atala Cult 6.2 26”



- Agile CAN
- Phylion 418Wh
- Atala A15 LED CAN
- 26”
- 7s
- 26,8 kg

White/Anthracite	
45	0115309900

Frame	Alu. Hydroformed 26’’, easy access, internal battery, internal cables
Fork	Suntour NEX 26’’, alu with alu crown, 63mm
Headset	FSA integrated ahead 1”1/8
Cranckset	AM80 Alu 170mm, Miche 38T
Rear Derailleur	Shimano Tourney RD-TY500
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Promax alu, V-Brake, levers 3 fingers
Cassette	Shimano HG200 7s 12/32
Pedals	Resin antislip
Hub	Shimano TX500, 36h, quick release
Rims	Beretta 26", double wall w/eylets, 36h
Stem	Byte alu, ahead, adjustable
Handlebar	Byte Steel City
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Wave
Tyres	Byte Garda 26”x1,75”, with reflecting line
Mudguards	Single stay speedy
Chaincover	Plastic, L type
Carriers	Rear steel 10mm with spring, 25kg load
External Lights	Axa front (15 lux) and rear LED, controlled by display and twilight sensor

Motor	AM80 Agile CAN 36 V, 250W
Max Torque	80 Nm
Sensor Type	Torque
Battery	Phylion Li-Ion 36V, 418Wh, on frame, with Smart BMS CAN
Charger Type	2 A Europlug
Change Time	100%: 6h:30m / 80%: 5h48m
Max Assisted Speed	25 km/h
Display	Atala A15 LED CAN, Power +/-
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control Speed information Battery information

Atala Desire 6.3 26”



- AM80 Easy
- Phylion 418Wh
- Atala A19 Digit LED UART
- 26”
- 7s
- 23,6 kg

2023

	White Glossy
45	0115311700

Frame	Alu. Hydroformed 26’’, easy access, integrated battery, internal cables
Fork	HL CH-187 26’’, alu with alu crown, 60mm travel, 30mm stanchions
Headset	FSA integrated ahead 1”1/8
Cranckset	Alu 170mm, Miche 38T
Rear Derailleur	Shimano Tourney RD-TY500
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 160 mm CL
Cassette	Shimano HG200 7s 12-32
Pedals	Resin antislip
Hub	Shimano TX505, CL, 32h, quick release
Rims	Rodi 26’’, double wall w/eylets, 32h, disc
Stem	Byte alu, ahead, adjustable
Handlebar	Byte steel City, 600mm, rise 60mm
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Aurorae
Tyres	Byte Garda 26”x1,75”, with reflecting line
Mudguards	Single stay speedy, edge
Chaincover	L type, edge
Carriers	Rear steel 10mm with spring, no bracket, 25kg load
External Lights	Axa front (15 lux) and rear LED, controlled by display

Motor	AM80 Easy UART 36 V, 250W
Max Torque	70 Nm
Sensor Type	Torque
Battery	Phylion Li-Ion 36V, 418Wh, on frame, with Smart BMS UART
Charger Type	2 A Europlug
Change Time	100%: 6h:18m / 80%: 4h38m
Max Assisted Speed	25 km/h
Display	Atala A19 Digit LED UART
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control Speed information Battery range %

Atala

Deal 5.3 26”



- AM80 Easy
- Phylion 518Wh
- Atala A19 Digit LED UART
- 26”
- 7s
- 26,6 kg

2023

Anthracite Matt	
45	0115311800

Frame	Alu. 26’’, easy access, integrated HIT, disc brake, internal cables
Fork	HL CH-187 26’’, alu with alu crown, 60mm travel, 30mm stanchions
Headset	FSA integrated ahead 1”1/8
Cranckset	Alu 170mm, Miche 38T
Rear Derailleur	Shimano Tourney RD-TY500
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 160 mm CL
Cassette	Shimano HG200 7s 12-32
Pedals	Resin antislip
Hub	Shimano TX505, CL, 32h, quick release
Rims	Rodi 26’’, double wall w/eylets, 32h, disc
Stem	Byte alu, ahead, adjustable
Handlebar	Byte steel City, 600mm, rise 60mm
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Wave
Tyres	Byte Garda 26”x1,75’’
Mudguards	Single stay speedy, edge
Chaincover	L type, edge
Carriers	Battery rear carrier with spring, 25kg - Front carrier by tube
External Lights	Axa front (15 lux) and rear LED, controlled by display

Motor	AM80 Easy UART 36 V, 250W
Max Torque	70 Nm
Sensor Type	Torque
Battery	Phylion Li-Ion 36V, 518Wh, under carrier, with Smart BMS UART, integrated rear light
Charger Type	2 A Europlug
Change Time	100%: 7h:30m / 80%: 5h40m
Max Assisted Speed	25 km/h
Display	Atala A19 Digit LED UART
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control Speed information Battery range %

Atala Califfo



- Agile CAN
- Phylion 418Wh
- Atala A15 LED CAN
- 20”
- 7s
- 28 kg

	Blue Matt
43	0115314050

	Grey Matt
43	0115314050

Frame	Alu. Hydroformed 20x4", easy access, integrated battery, integrated carrier, internal cables
Fork	HL CH-879 20" Fat, alu with alu crown, whith hydraulic lockout, 80mm
Headset	FSA integrated ”1/8
Cranckset	Alu 155mm, FSA 44T
Rear Derailleur	Shimano Tourney RD-FT35
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 160 mm INT
Freewheel	Shimano Tourney 7s 14-28
Pedals	Alu City
Hub	Alloy 36h, Disc INT, 135/170mm
Rims	Alloy 20x4", double wall, 36h
Stem	Byte alu, ahead, adjustable
Handlebar	Byte steel City, 690mm, rise 120mm
Seatpost	Byte alu with clamp, 31,6mm
Saddle	Comfot City
Tyres	Fat City 20”x4”
Mudguards	Steel painted, no stays
Chaincover	Plastic L type
Carriers	Integrated with frame, w/alloy support plate, 25kg load
External Lights	Front high lux and rear LED, controlled by display

Motor	AM80 Agile CAN 36 V, 250W
Max Torque	80 Nm
Sensor Type	Torque
Battery	Phylion Li-Ion 36V, 418Wh, on frame, with Smart BMS CAN
Charger Type	2 A Europlug
Change Time	100%: 6h:30m / 80%: 4h40m
Max Assisted Speed	25 km/h
Display	Atala A15 LED CAN, Power +/-
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control



Atala Club



- Agile CAN
- Phylion 313Wh
- Atala A15 LED CAN
- 20”
- 7s
- 20,3 kg

Ultralight/Neon Red	
33	0115289320

Frame	Alu 20”, foldable, with integrated battery
Fork	Hi-Ten Tig 20’’
Headset	Integrated 1”1/8, threaded, with cap
Cranckset	AM80 alu 152mm, FSA 44T
Rear Derailleur	Shimano Tourney RD-TY500
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Shimano BR-MT200 hydraulic disc, Rotor 160 mm INT
Cassette	Shimano HG200 7s 12-32
Pedals	Resin Foldable
Hub	Shimano TX505 32h, CL, quick release
Rims	Rodi 20", double wall w/eylets, 32h, disc
Stem	Alu, foldable, adjustable
Handlebar	Alu, 30mm rise
Seatpost	Alu with clamp, 34,9mm, telescopic
Saddle	Selle Royal Lancia
Tyres	Schwalbe Big Apple 20”x2,00”, with reflecting line, puncture proof
Mudguards	Single stay speedy
Chaincover	Plastic L type
Carriers	Alu rear carrier with spring
External Lights	Axa front (15 lux) and rear LED, controlled by display

Motor	AM80 Agile CAN 36 V, 250W
Max Torque	80 Nm
Sensor Type	Torque
Battery	Li-Ion 36V, 313Wh, inside down tube, with BMS
Charger Type	2 A Europlug
Change Time	100%: 5h:20m / 80%: 3h52m
Max Assisted Speed	25 km/h
Display	Atala A15 LED CAN, Power +/-
Power	5 levels, Power adjust level1: 50% level2: 100% level3: 150% level4: 200% level5: 250%
Other Functions	Walking assistance External light control

Atala E-Spike 8.2



- Ananda
- Li-Ion 540Wh
- Atala A10 LCD Smart CAN
- 28”
- 8s
- 27,8 kg

Man: Black/Ultalight	
49	0115314650

Lady: Grey/Blue	
45	0115314600

Frame	Alu. 700c, integrated battery, integrated HT, disc brake, internal cables
Fork	Suntour NEX 700c, alu with alu crown, 50mm
Headset	FSA integrated 1”1/8
Cranckset	Byte alu 42T cartridge
Rear Derailleur	Shimano Altus RD-M310
Shifters Levers	Shimano SL-M315 PushPull, 8s
Brakes	Hydraulic disk, Rotor 160 mm, with brake lever switch
Freewheel	DNP 8s 13-28
Pedals	Resin Antislip
Hub	Shimano quick release front, motor on rear, 36h, INT
Rims	Beretta 700c, double wall w/eylets, 36h, disc
Stem	Byte alu over, ahead, adjustable
Handlebar	Byte alu over TKK, 640mm, rise 25mm
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Lancia
Tyres	Byte Trento 700x45c, with reflecting line
Mudguards	Single stay speedy
Chaincover	Plastic L type
Carriers	Rear alu 14mm with spring, 25kg load
External Lights	Axa front (15 lux) and rear LED, controlled by display and twilight sensor

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	45 Nm
Sensor Type	Torque
Battery	Li-Ion 36V, 540Wh, inside the frame, Samsung cells with Smart BMS CAN
Charger Type	2 A Europlug
Change Time	100%: 8h:50m / 80%: 6h40m
Max Assisted Speed	25 km/h
Display	Atala A10 LCD Smart CAN, with remote control
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control Speed information Battery information



Atala E-Spike 8.1 LTD



Ananda
Li-Ion 418Wh
Atala A10 LCD Smart CAN
28”
8s
27,8 kg

	Black/Ultalight
49	0115300355

Frame	Alu. 700c, integrated battery, integrated HT, disc brake, internal cables
Fork	Suntour NEX 700c, alu with alu crown, 50mm
Headset	FSA integrated 1”1/8
Cranckset	Byte alu 42T cartridge
Rear Derailleur	Shimano Altus RD-M310
Shifters Levers	Shimano SL-M315 PushPull, 8s
Brakes	Hydraulic disk, Rotor 160 mm, with brake lever switch
Freewheel	DNP 8s 13-28
Pedals	Resin Antislip
Hub	Shimano quick release front, motor on rear, 36h, INT
Rims	Beretta 700c, double wall w/eylets, 36h, disc
Stem	Byte alu over, ahead, adjustable
Handlebar	Byte alu over TKK, 640mm, rise 25mm
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Lancia
Tyres	Byte Trento 700x45c, with reflecting line
Mudguards	Single stay speedy
Chaincover	Plastic L type
Carriers	Rear alu 14mm with spring, 25kg load
External Lights	Axa front (15 lux) and rear LED, controlled by display and twilight sensor

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	45 Nm
Sensor Type	Torque
Battery	Li-Ion 36V, 418Wh, inside the frame, with Smart BMS CAN
Charger Type	2 A Europlug
Change Time	100%: 6h:56m / 80%: 5h10m
Max Assisted Speed	25 km/h
Display	Atala A10 LCD Smart CAN, with remote control
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control Speed information Battery information

Atala E-Spike 7.1



- Ananda
- Li-Ion 360Wh
- Atala A15 LED UART
- 28”
- 7s
- 28,3 kg

Man: Grey/Blue	
49	0115300450

Lady: Black/Ultralight	
45	0115300400

Frame	Alu. 700c, integrated battery, integrated HT, disc brake, internal cables
Fork	Suntour NEX 700c, alu with alu crown, 50mm
Headset	FSA integrated 1”1/8
Cranckset	Byte alu 42T cartridge
Rear Derailleur	Shimano Tourney RD-TY500
Shifters Levers	Shimano SL-M315 PushPull, 7s
Brakes	Tektro Aries MD-M300, Mechanic disk, Rotor 160 mm, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin City
Hub	Shimano quick release front, motor on rear, 36h, INT
Rims	Beretta 700c, double wall w/eylets, 36h, disc
Stem	Byte alu, adjustable
Handlebar	Byte steel TKK
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Wave
Tyres	Byte Trento 700x45c
Mudguards	Single stay speedy
Chaincover	Plastic L type
Carriers	Rear steel 10mm with spring, 25kg load
External Lights	Axa front (15 lux) and rear LED, controlled by display

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Torque
Battery	Li-Ion 36V, 360Wh, inside the frame, with BMS
Charger Type	2 A Europlug
Change Time	100%: 6h:4m / 80%: 4h27m
Max Assisted Speed	25 km/h
Display	Atala A15 LED CAN, Power +/-
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control



Atala E-Space 8.2



Ananda
Li-Ion 540Wh
Atala A10 LCD Smart CAN
28”
8s
26,7 kg

	Blue/Grey Matt
45	0115314700

Frame	Alu. 700c, easy access, integrated battery, integrated HT, disc brake, internal cables
Fork	Suntour NEX 700c, alu with alu crown, 63mm
Headset	FSA integrated 1”1/8
Cranckset	Byte alu 42T cartridge
Rear Derailleur	Shimano Altus RD-M310
Shifters Levers	Shimano Tourney SL-RS45 RevoShift, 8s
Brakes	Hydraulic disk, Rotor 160 mm, with brake lever switch
Freewheel	DNP 8s 13-28
Pedals	Resin Antislip
Hub	Shimano quick release front, motor on rear, 36h, INT
Rims	Beretta 700c, double wall w/eylets, 36h, disc
Stem	Byte alu over, ahead, adjustable
Handlebar	Byte alu over TKK, 640mm, rise 25mm
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Aurorae w/elastomer
Tyres	Byte Trento 700x45c, with reflecting line
Mudguards	Single stay speedy
Chaincover	Plastic L type
Carriers	Rear alu 14mm with spring, 25kg load
External Lights	Axa front (15 lux) and rear LED, controlled by display and twilight sensor

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	45 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Li-Ion 36V, 540Wh, inside the frame, Samsung cells with Smart BMS CAN
Charger Type	2 A Europlug
Change Time	100%: 8h:50m / 80%: 6h40m
Max Assisted Speed	25 km/h
Display	Atala A10 LCD Smart CAN, with remote control
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control Speed information Battery information

Atala E-Run 8.1 HD



Ananda
Phylion Li-Ion 518Wh
Atala A15 LED UART
28" / 26''
7s
27,8 kg

Man: Ultralight/ Anthracite	
49	0115300700

Lady: Black/Green	
45	0115300800

Frame	Alu. 700c, integrated battery, disc brake, internal cables /Alu. 26", easy access, integrated HT, disc brake, internal cables
Fork	HL CH-187 700c /26'', alu with alu crown, 40mm
Headset	FSA integrated 1"1/8
Cranckset	Byte alu 42T cartridge
Rear Derailleur	Shimano Tourney RD-TY500
Shifters Levers	Shimano SL-M315 PushPull, 7s
Brakes	Hydraulic disk, Rotor 160 mm, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin Antislip
Hub	Shimano quick release front, motor on rear, 36h, INT
Rims	Beretta 700c /26'', double wall w/eylets, 36h, disc
Stem	Byte alu, adjustable
Handlebar	Byte steel TKK
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Wave
Tyres	Byte Trento 700x45c /Byte Garda 26"x1,75"
Mudguards	Single stay speedy
Chaincover	Plastic L type
Carriers	Battery rear carrier with spring, 25kg
External Lights	Axa front (15 lux) and rear LED, controlled by display

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Phylion Li-Ion 36V, 518Wh, under carrier, with Smart BMS, integrated rear light
Charger Type	2 A Europlug
Change Time	100%: 7h:30m / 80%: 5h40m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control



Atala E-Run 7.1 FS



- Ananda
- Phylion Li-Ion 518Wh
- Atala A15 LED UART
- 28”
- 7s
- 28,5 kg

Man: Black/ Neon Red	
49	0115300900

Frame	Alu. 700c, internal cables
Fork	HL CH-187 700c, alu with alu crown, 40mm
Headset	Steel 1”1/8, threaded, with cap
Cranckset	Byte steel 42T cartridge, with cap
Rear Derailleur	Shimano Tourney RD-TY300
Shifters Levers	Shimano SL-M35 RevoShift, 7s
Brakes	Promax alu, V-Brake, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin City
Hub	Alu 36h, Shimano front, motor on rear
Rims	Beretta 700c, double wall w/eylets, 36h, disc
Stem	Byte alu, adjustable
Handlebar	Byte steel TKK
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Wave
Tyres	Byte Trento 700x45c
Mudguards	Single stay speedy
Chaincover	Steel painted, L type
Carriers	Battery rear carrier with spring, 25kg
External Lights	Axa front (15 lux) and rear LED, controlled by display

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Phylion Li-Ion 36V, 518Wh, under carrier, with Smart BMS, integrated rear light
Charger Type	2 A Europlug
Change Time	100%: 7h:30m / 80%: 5h40m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control

Atala E-Run 6.1 FS



- Ananda
- Phylion Li-Ion 360Wh
- Atala A15 LED UART
- 28” /26’’
- 7s
- 28,5 kg

Man: Black/ Neon Red	
49	0115301100

Lady: Ultralight/ Anthracite	
45	0115301200

Frame	Alu. 700c, internal cables /Alu. 26", easy access, internal cables
Fork	HL CH-187 700c /26’’, alu with alu crown, 40mm
Headset	Steel 1”1/8, threaded, with cap
Cranckset	Byte steel 42T cartridge, with cap
Rear Derailleur	Shimano Tourney RD-TY300
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Promax alu, V-Brake, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin City
Hub	Alu 36h, Shimano front, motor on rear
Rims	Beretta 700c /26’’, double wall w/eylets, 36h, disc
Stem	Byte alu, adjustable
Handlebar	Byte steel TKK
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Wave
Tyres	Byte Trento 700x45c /Byte Garda 26”x1,75”
Mudguards	Single stay speedy
Chaincover	Steel painted, L type
Carriers	Battery rear carrier with spring, 25kg
External Lights	Axa front (15 lux) and rear LED, controlled by display

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Phylion Li-Ion 36V, 360Wh, under carrier, with BMS, integrated rear light
Charger Type	2 A Europlug
Change Time	100%: 6h:4m / 80%: 4h27m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control



Atala E-Run 7.1 28”



- Ananda
- Phylion Li-Ion 518Wh
- Atala A15 LED UART
- 28”
- 7s
- 28,4 kg

	Man: Anthracite/ Neon Green
49	0115301300

	Man: White/ Red
49	0115301500

Frame	Alu. 700c, internal cables
Fork	Hi-Ten Tig 700c
Headset	Steel 1”1/8, threaded, with cap
Cranckset	Byte steel 42T cartridge, with cap
Rear Derailleur	Shimano Tourney RD-TY300
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Promax alu, V-Brake, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin City
Hub	Alu 36h, Shimano front, motor on rear
Rims	Beretta 700c, double wall w/eylets, 36h, disc
Stem	Byte alu, adjustable
Handlebar	Byte steel TKK
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Wave
Tyres	Byte Trento 700x45c
Mudguards	Single stay speedy
Chaincover	Steel painted, L type
Carriers	Battery rear carrier with spring, 25kg
External Lights	Axa front (15 lux) and rear LED, controlled by display

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Phylion Li-Ion 36V, 518Wh, under carrier, with Smart BMS, integrated rear light
Charger Type	2 A Europlug
Change Time	100%: 7h:30m / 80%: 5h40m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control



Atala E-Run 7.1 26”



- Ananda
- Phylion Li-Ion 518Wh
- Atala A15 LED UART
- 26”
- 7s
- 28,2 kg

Ultralight/ Anthracite	
45	0115301400

	White/ Blue
45	0115301450

Frame	Alu. 26", easy access, internal cables
Fork	Hi-Ten Tig 26’’
Headset	Steel 1”1/8, threaded, with cap
Cranckset	Byte steel 42T cartridge, with cap
Rear Derailleur	Shimano Tourney RD-TY300
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Promax alu, V-Brake, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin City
Hub	Alu 36h, Shimano front, motor on rear
Rims	Beretta 26’’, double wall w/eylets, 36h, disc
Stem	Byte alu, adjustable
Handlebar	Byte steel TKK
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Wave
Tyres	Byte Garda 26”x1,75”
Mudguards	Single stay speedy
Chaincover	Steel painted, L type
Carriers	Battery rear carrier with spring, 25kg
External Lights	Axa front (15 lux) and rear LED, controlled by display

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Phylion Li-Ion 36V, 518Wh, under carrier, with Smart BMS, integrated rear light
Charger Type	2 A Europlug
Change Time	100%: 7h:30m / 80%: 5h40m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control



Atala E-Run 6.1



- Ananda
- Phylion Li-Ion 360Wh
- Atala A15 LED UART
- 26''
- 7s
- 27,8 kg

	Blue/ Champagne
45	0115301600

	White/ Red
45	0115301650

Frame	Alu. 26", easy access, internal cables
Fork	Hi-Ten Tig 26”
Headset	Steel 1”1/8, threaded, with cap
Cranckset	Byte steel 42T cartridge, with cap
Rear Derailleur	Shimano Tourney RD-TY300
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Promax alu, V-Brake, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin City
Hub	Alu 36h, Shimano front, motor on rear
Rims	Beretta 26’’, double wall w/eylets, 36h, disc
Stem	Byte alu, adjustable
Handlebar	Byte steel City
Seatpost	Byte alu with clamp, 27,2mm
Saddle	Selle Royal Wave
Tyres	Byte Garda 26”x1,75”
Mudguards	Single stay speedy
Chaincover	Steel painted, L type
Carriers	Battery rear carrier with spring, 25kg / Front Carrier
External Lights	Axa front (15 lux) and rear LED, controlled by display

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Li-Ion 36V, 360Wh, under carrier, with BMS, integrated rear light
Charger Type	2 A Europlug
Change Time	100%: 6h:4m / 80%: 4h27m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control



Atala E-Folding



- Ananda
- Li-Ion 313Wh
- Atala A15 LED UART
- 20”
- 7s
- 23 kg

Black/ Neon Green	
33	0115302050

Frame	Alu 20”, foldable, with integrated battery
Fork	Hi-Ten Tig 20’’
Headset	Integrated 1”1/8, threaded, with cap
Cranckset	Byte alu 152mm, 42T, cartridge
Rear Derailleur	Shimano Tourney RD-TF35
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Promax alu, V-Brake, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin Foldable
Hub	Alu 36h, Shimano front, motor on rear
Rims	Beretta 20" alu, double wall, 36h
Stem	Alu, foldable, adjustable
Handlebar	Alu, 20mm rise
Seatpost	Alu with clamp, 34,mm, 500mm long
Saddle	Selle Royal Mach
Tyres	20”x1,75”
Mudguards	Single stay speedy
Chaincover	Plastic L type
Carriers	Alu rear carrier with spring
External Lights	Front and rear LED, controlled by display

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Li-Ion 36V, 313Wh, inside down tube, with BMS
Charger Type	2 A Europlug
Change Time	100%: 5h:20m / 80%: 3h52m
Max Assisted Speed	25 km/h
Display	Atala A15 LED CAN, Power +/-
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control



Atala Extrafolding 7.2



- Bafang
- Li-Ion 630Wh
- LCD
- 20”
- 7s
- 31,5 kg

	Black/ Orange
45	0115301755

Frame	Alu 20” FAT, foldable, integrated battery, integrated HT, disc brake, internal cables
Fork	HL CH-879 20" Fat, alu with alu crown, 32mm, with hydraulic lockout, 80mm
Headset	FSA Integrated 1”1/8
Cranckset	Alu 170mm, 42T, cartridge
Rear Derailleur	Shimano Tourney RD-TF35D
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Hydraulic disk, Rotor 180 mm, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin Foldable
Hub	Alu 36h, axle 135 F/175 R, motor on rear
Rims	20" alu, double wall, 36h
Stem	Alu, foldable, adjustable
Handlebar	Alu, 20mm rise
Seatpost	Alu with clamp, 33,9,mm
Saddle	Selle Royal Wave
Tyres	20”x4
Mudguards	Steel painted
Chaincover	Paracatena
Carriers	Alu rear carrier custom, 25kg
External Lights	Axa front (30Lux) and rear LED, controlled by display

Motor	Bafang brushless 36V 250W, on rear hub
Sensor Type	Speed sensor w/12 pulses
Battery	Li-Ion 36V, 630Wh, inside the frame, Samsung cells with BMS
Charger Type	2 A Europlug
Change Time	100%: 10h:14m / 80%: 7h47m
Max Assisted Speed	25 km/h
Display	LCD, Power +/-
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control Speed information

Atala Extrafolding 7.1 LTD



- Bafang
- Li-Ion 522Wh
- LCD
- 20”
- 7s
- 31,5 kg

	Black/ Orange
45	0115314800

	Black/ Anthracite
45	0115314850

Frame	Alu 20” FAT, foldable, integrated battery, integrated HT, disc brake, internal cables
Fork	Susp 45mm 20”x4", alu crown, whith mechanical lockout
Headset	FSA Integrated 1”1/8
Cranckset	Alu 170mm, 42T, cartridge
Rear Derailleur	Shimano Tourney RD-TF35D
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Hydraulic disk, Rotor 180 mm, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin Foldable
Hub	Alu 36h, axle 135 F/175 R, motor on rear
Rims	20" alu, double wall, 36h
Stem	Alu, foldable, adjustable
Handlebar	Alu, 20mm rise
Seatpost	Alu with clamp, 33,9,mm
Saddle	Selle Royal Wave
Tyres	20”x4
Mudguards	Steel painted
Chaincover	Paracatena
Carriers	Alu rear carrier custom, 25kg
External Lights	Axa front (30Lux) and rear LED, controlled by display

Motor	Bafang brushless 36V 250W, on rear hub
Sensor Type	Speed sensor w/12 pulses
Battery	Li-Ion 36V, 522Wh, inside the frame, Samsung cells with BMS
Charger Type	2 A Europlug
Change Time	100%: 8h:33m / 80%: 6h27m
Max Assisted Speed	25 km/h
Display	LCD, Power +/-
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control Speed information



Atala Extrafolding



- Bafang
- Li-Ion 540Wh
- LCD
- 20”
- 7s
- 31 kg

	Black/ Yellow
43	0115312700

	Neon Green/ Black
43	0115290705

Frame	Alu 20” FAT, foldable, integrated HT, disc brake
Fork	Susp 45mm 20”x4", alu crown, whith mechanical lockout
Headset	Integrated 1”1/8, threaded
Cranckset	Alu 170mm, 42T, cartridge
Rear Derailleur	Shimano Tourney RD-TF35D
Shifters Levers	Shimano Tourney SL-RS35 RevoShift, 7s
Brakes	Hydraulic disk, Rotor 180 mm, with brake lever switch
Freewheel	Shimano Tourney 7s 14-28
Pedals	Resin Foldable
Hub	Alu 36h, axle 135 F/175 R, motor on rear
Rims	20" alu, double wall, 36h
Stem	Alu, foldable, adjustable
Handlebar	Alu, 20mm rise
Seatpost	Alu with clamp, 27,2mm, 400mm long
Saddle	Selle Royal Wave
Tyres	20”x4
Mudguards	Steel painted
Chaincover	Paracatena
Carriers	Alu integrato al telaio
External Lights	Spanninga front (16Lux) and rear LED, controlled by display

Motor	Bafang brushless 36V 250W, on rear hub
Sensor Type	Speed sensor w/12 pulses
Battery	Li-Ion 36V, 540Wh, behind seat tube, with BMS
Charger Type	2 A Europlug
Change Time	100%: 8h:50m / 80%: 6h40m
Max Assisted Speed	25 km/h
Display	LCD, Power +/-
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control Speed information



Atala E-Way



- Ananda
- Li-Ion 360Wh
- Atala A15 LED UART
- 26''
- 6s
- 27,6 kg

Black /Blue Light	
41	0115290600

White/ Neon Green	
41	0115290603

Frame	Hi-Ten Tig 26", easy access, internal cables
Fork	Hi-Ten Tig 26”
Headset	Steel 1”1/8, threaded, with cap
Cranckset	Byte steel 42T cartridge, with cap
Rear Derailleur	Shimano Tourney RD-TZ500
Shifters Levers	Shimano Tourney SL-RS36 RevoShift, 6s
Brakes	Promax alu, V-Brake, with brake lever switch
Freewheel	Shimano Tourney 6s 14-28
Pedals	Resin City
Hub	Alu 36h, Shimano front, motor on rear
Rims	Beretta 26’’, double wall w/eylets, 36h, disc
Stem	Alu
Handlebar	Byte steel City
Seatpost	Alu, 25,4mm
Saddle	Selle Royal Wave
Tyres	Byte Garda 26”x1,75”
Mudguards	Single stay speedy
Chaincover	Steel painted, L type
Carriers	Rear carrier, 25kg / front carrier
External Lights	Front and rear LED, controlled by display

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Li-Ion 36V, 360Wh, behind seat tube, with BMS
Charger Type	2 A Europlug
Change Time	100%: 6h:4m / 80%: 4h27m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control



Atala E-Way 24+



Ananda
Li-Ion 360Wh
Atala A15 LED UART
24''
6s
kg

2023

	White
43	0115314505

	Anthracite
43	0115314500

Frame	Hi-Ten Tig 24", easy access, integrated HT, internal cables
Fork	Hi-Ten Tig 24”
Headset	Integrated 1”1/8, threaded, with cap
Cranckset	Byte steel 42T cartridge, with cap
Rear Derailleur	Shimano Tourney RD-TZ500
Shifters Levers	Shimano Tourney SL-RS36 RevoShift, 6s
Brakes	Promax alu, V-Brake, with brake lever switch
Freewheel	Shimano Tourney 6s 14-28
Pedals	Resin City
Hub	Alu 36h, Shimano front, motor on rear
Rims	Rodi 24" 25c alu, double wall w/eylets, 36h
Stem	Alu
Handlebar	Byte steel City, 600mm, rise 60mm
Seatpost	Alu, 25,4mm
Saddle	Selle Royal Wave
Tyres	CST 24”x2,40” City
Mudguards	Steel painted
Chaincover	Steel painted, L type
Carriers	Rear steel 10mm, 25kg load / front by tube
External Lights	Axa front (15 lux) and rear LED, controlled by display

Motor	Ananda brushless 36V 250W, on rear hub
Max Torque	35 Nm
Sensor Type	Speed sensor w/12 pulses
Battery	Li-Ion 36V, 360Wh, behind seat tube, with BMS
Charger Type	2 A Europlug
Change Time	100%: 6h:4m / 80%: 4h27m
Max Assisted Speed	25 km/h
Display	Atala A15 LED UART, Power +/-
Power	5 levels, Speed/Torque adjust
Other Functions	Walking assistance External light control